




Lighting-Power-Control

ONTEC C M1U 301 NM ST

Part Code: RDF-OC.MUSTN300W

Recessed 90mm Circular Downlight with Multiple Lens Options

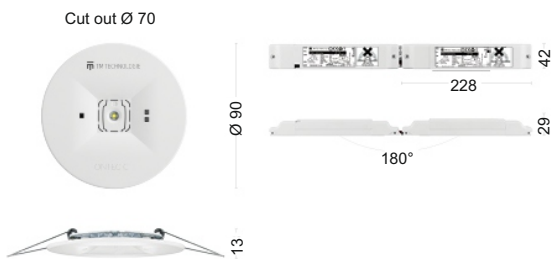

PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN-62471, EN 1838
Warranty	3 years battery 2 years
IP	IP20
IK	IK03
Version	ST – standard manual test
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	PC
Colour	white (available in black and other colours)
Duration time	3h
Operating mode	NM (non-maintained)
Maximum light power	3 W
Active power	4.8 W
Insulation class	2
Luminous flux	158 lm
Battery	Ni-Cd HT 3.6V 1.5Ah

- Auto-test, DATA2 addressable and DALI versions available for all ONTEC C variants
- Multiple options including higher light output and corridor lens available, see RDF website for details




ONTEC C M1U 301 NM ST

Part Code: RDF-OC.MUSTN300W

Recessed 90mm Circular Downlight with Multiple Lens Options

PHOTOMETRY (m)

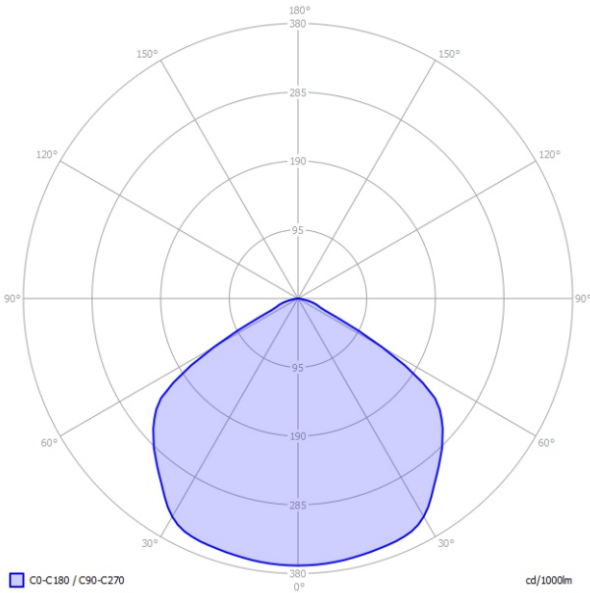

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2.5	3.3	7.1
3.0	3.6	8.1
4.0	4.1	9.7
5.0	4.1	11.4
6.0	4.0	12.5
7.0	3.9	12.9
8.0	3.8	13.2
9.0	3.4	12.5
10.0	3.1	11.7

