



Lighting-Power-Control


TM TECHNOLOGIE

only one way

## ONTEC E E1B 301 M ST W

Part Code: RDF-OE.EB.ST002

Surface Mount Exit Sign with Fully Recessed Option

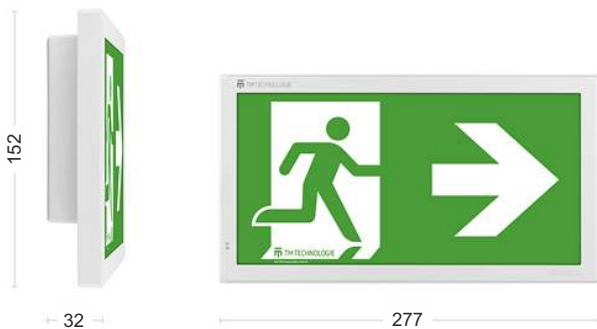

### PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN-62471, EN 1838
Warranty	5 years battery 2 years
IP	IP20
IK	IK05
Version	ST – standard manual test
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	PC
Colour	white (available in black and other colours)
Duration time	3h
Operating mode	M (maintained / non-maintained)
Maximum light power	1.5 W
Active power	1.6 W
Insulation class	2
Luminance	>150 cd/m <sup>2</sup>
Viewing Distance	25 m version (larger sizes available)
Battery	Ni-Cd HT 3.6V 0.8Ah

- Auto-test, addressable and DALI versions available for all ONTEC E variants
- Recessing kit available, see RDF website for details

