




Lighting-Power-Control

ONTEC R M1U 301 NM

Part Code: RDF-OR.MU.ST003

Surface-Mount Square Downlight with Multiple Options

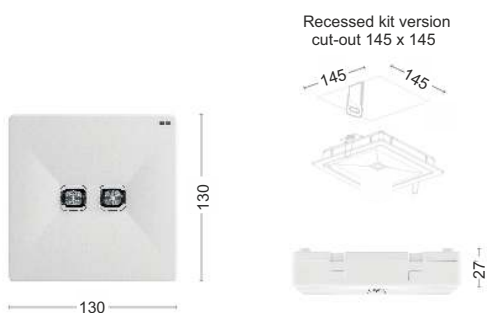

PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN-62471, EN 1838
Warranty	5 years battery 3 years
IP	IP20
IK	IK03
Version	ST – standard (no auto-test)
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	PC
Colour	white (available in black and other colours)
Duration time	3h
Operating mode	NM (non-maintained)
Maximum light power	2.0 W
Active power	1.7 W
Insulation class	2
Luminous flux	158 lm
Battery	LiFePO ₄ /C


- All ONTEC D versions available with auto-test, addressable and DALI
- Multiple options including higher light output and corridor lens available
- Recessing kit also available, contact us for details.



ONTEC R M1U 301 NM

Part Code: RDF-OR.MU.ST003

Surface-Mount Square Downlight with Multiple Options

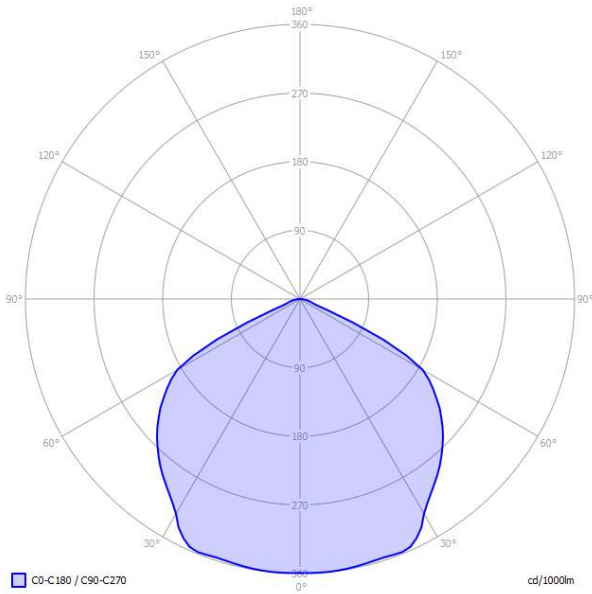

PHOTOMETRY

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2.5	3.4	7.7
3.0	3.6	8.8
4.0	3.8	10.5
5.0	4.0	11.8
6.0	3.8	12.5
7.0	3.7	12.9
8.0	3.6	13.2
9.0	3.4	13.0
10.0	3.1	12.5

