



Lighting-Power-Control

ONTEC S 110V Slave

Part Code: RDF-OS.M1.CB007

High Output IP65 Slave Emergency Bulkhead / Exit Sign for 110V CBU's



PARAMETERS

Application	anti-panic light / exit sign
IP	IP65
IK	08
Version	For CBU's and Inverters
Power supply	108V and 110V AC/DC Systems
Temperature range	-15 to +55 °C
Material	PC (various colours)
Viewing distance	25m exit legend included
Duration time	NA
Operating mode	non-maintained
Active power	4.8 W
Insulation class	2
Luminous flux	141 lm (M1 version)
Battery	None

FEATURES


- High output IP65 slave bulkhead light and exit sign for 110V / 108V central battery (CBU) systems
- Universal exit legends included for arrow in up, down, left, right directions
- 5 year warranty
- Suitable for use in very cold or very warm environments (no internal battery)
- Other optics available e.g. for corridors or angled light spread
- Drop legend blade available for combined light and escape direction indication
- Other accessories include recessed mounting (255mm x 130mm cut out) and vandal proof cage
- Also available in 24V, 50V, 230V, addressable and DALI versions

ONTEC S 110V Slave

Part Code: RDF-OS.M1.CB007

High Output IP65 Slave Emergency Bulkhead / Exit Sign for 110V CBUs

PHOTOMETRY[m]

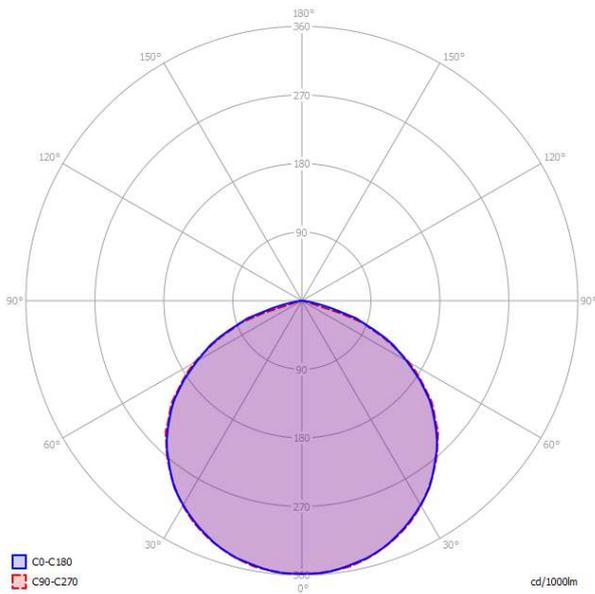

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2.5	3.0	8.3
3.0	3.2	9.0
4.0	3.4	10.3
5.0	3.6	11.0
6.0	3.6	11.8
7.0	3.4	12.2
8.0	3.0	12.0
9.0	2.6	11.7
10.0	2.4	11.5

