



Lighting-Power-Control

ONTEC S20 M1X 60/180 M/NM



Part Code: RDF-S2.MXSTX060W

Multi-purpose IP65 Compact Emergency Bulkhead and Exit Sign



PARAMETERS

Application	anti-panic light / exit sign
IP	IP65
IK	08
Version	standard
Power supply	230V AC 50/60 Hz
Temperature range	+5 to +40 °C
Material	white PC
Viewing distance	20m
Duration time	dual 3h / 1h
Operating mode	maintained
Active power	3.6 W
Insulation class	2
Luminous flux	dual 150 lm / 350 lm
Battery	LiFePO ₄ /C 3.2V 1.5Ah

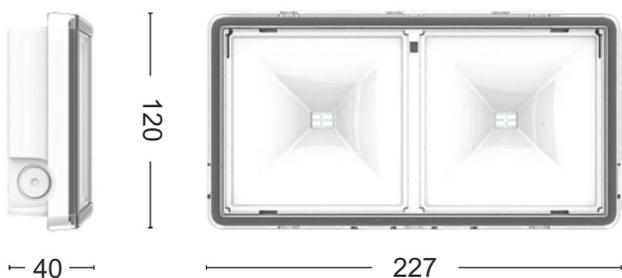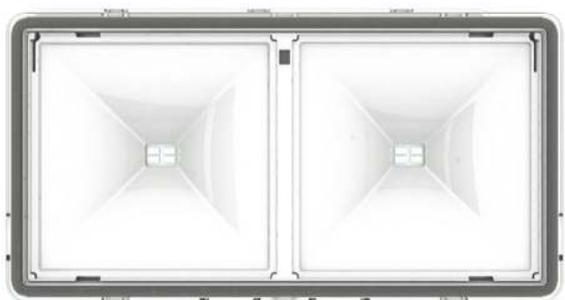

FEATURES

- Multi-purpose IP65 Compact Emergency Bulkhead Light and Exit Sign
- Ideal CE compliant replacement for standard emergency bulkhead fittings
- 150 lumen output in 3 hour mode
- 350 lumen in 1 hour mode for high risk task area lighting (internal dip switch)
- Universal exit legends included for arrow in up, down, left, right directions
- Long life lithium iron phosphate battery for >5 year life
- Configurable to work in either maintained or non-maintained modes.

ONTEC S20 M1X 60/180 M/NM

Part Code: RDF-S2.MXSTX060W

Multi-purpose IP65 Compact Emergency Bulkhead and Exit Sign

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2.5	3.0	8.3
3.0	3.2	9.0
4.0	3.4	10.3
5.0	3.6	11.0
6.0	3.6	11.8
7.0	3.4	12.2
8.0	3.0	12.0
9.0	2.6	11.7
10.0	2.4	11.5

