




Lighting-Power-Control

PRIMO C C1 302 M AT

Part Code: RDF-PC.C1.AT03W

Metal Recessed 90mm Round Corridor Downlight with Auto-Test

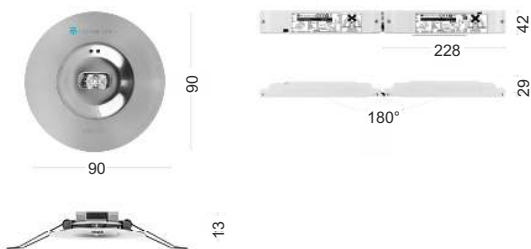

PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN-62471, EN 1838
Warranty	5 years battery 3 years
IP	IP20
IK	IK03
Version	AT – automatic test (self test)
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	metal with PC PSU
Colour	polished or satin steel
Duration time	3h
Operating mode	M (maintained / non-maintained)
Maximum light power	3 W
Active power	7 W
Insulation class	2
Luminous flux	260 lm
Battery	LiFePO ₄ /C 6.4V 1.5Ah

- Versions including standard (no-test), addressable and DALI are available for all PRIMO C variants
- Optional higher light output corridor version available, contact us for details




PRIMO C C1 302 M AT

Part Code: RDF-PC.C1.AT03W

Metal Recessed 90mm Round Corridor Downlight with Auto-Test

PHOTOMETRY [m]

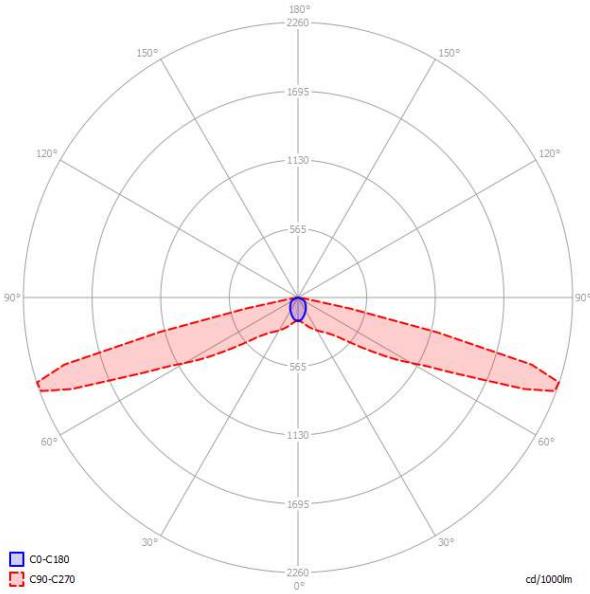

Ceiling height

2.5
3.0
4.0
5.0
6.0
7.0
8.0
9.0
10.0

Distance wall - fitting

9.2
10.2
11.7
10.9
5.6
3.6
2.7

Distance fitting - fitting

20.2
23.0
28.0
31.0
29.0
25.0
20.5

