




Lighting-Power-Control

# PRIMO D M2 302 M AT

Part Code: RDF-PD.M2.AT03W

Metal Recessed 90mm Square High-Output Downlight with Auto-Test

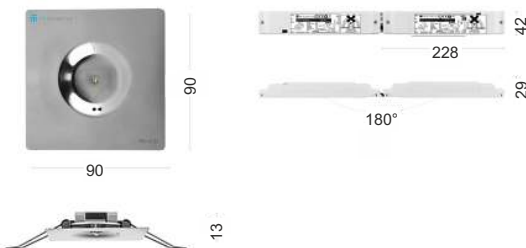

## PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN-62471, EN 1838
Warranty	5 years battery 3 years
IP	IP20
IK	IK03
Version	AT – automatic test (self test)
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	metal with PC PSU
Colour	polished steel
Duration time	3h
Operating mode	M (maintained / non-maintained)
Maximum light power	3 W
Active power	7 W
Insulation class	2
Luminous flux	288 lm
Battery	LiFePO <sub>4</sub> /C 6.4V 1.5Ah

- Versions including standard (no-test), addressable and DALI are available for all PRIMO D variants
- Multiple options including higher light output and corridor lens available, see RDF website for details




# PRIMO D M2 302 M AT

Part Code: RDF-PD.M2.AT03W

Metal Recessed 90mm Square High-Output Downlight with Auto-Test

## PHOTOMETRY [m]

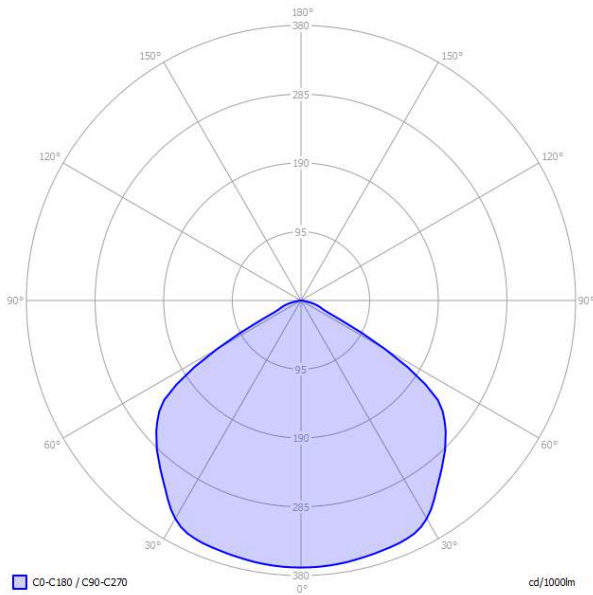

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2.5	3.4	7.8
3.0	4.0	8.8
4.0	4.8	10.9
5.0	5.3	12.2
6.0	5.4	14.0
7.0	5.4	15.2
8.0	5.3	16.0
9.0	5.3	17.0
10.0	5.0	17.5

