




Lighting-Power-Control

PRIMO E 40E to 80E

Multiple Size Metal Surface Mount Exit Box

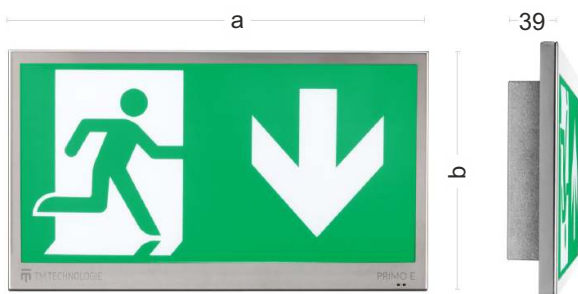

		a (mm)	b (mm)
PRIMO E	30	322	184
PRIMO E	40	422	234
PRIMO E	60	622	334
PRIMO E	80	822	434

PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN-62471, EN 1838
Warranty	5 years battery 3 years
IP	IP20
IK	IK05
Version	Standard or Auto-test
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	Metal
Colour	polished steel, satin steel or black
Duration time	3h
Operating mode	M (maintained / non-maintained)
Maximum light power	1.4 W to 3.6 W
Active power	5.6 W to 7.9W
Insulation class	1
Luminance	>150 cd/m ²
Viewing Distance	30, 40, 60 and 80m versions
Battery	Long Life; LiFePO ₄ /C

- Four different sizes available (see table above)
- Auto-test, addressable and DALI versions available for all PRIMO E variants
- Recessing kit available, see RDF website for details

