




Lighting-Power-Control

RINO M1 301 M AT

Part Code: RDF-RN.M1.AT076

Recessed 120mm Round Downlight with Auto-Test and Multiple Options

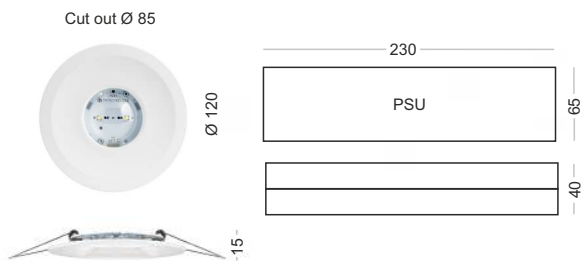

PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN 62471, EN 1838
Warranty	5 years battery 2 years
IP	IP44/20
IK	IK08
Version	AT – automatic test (self-test)
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 40 °C
Material	PC + Metal
Colour	white (available in black and other colours)
Duration time	3h
Operating mode	M (maintained / non-maintained)
Maximum light power	3.2 W
Active power	4.0 W
Insulation class	2
Luminous flux	146 lm
Battery	Ni-Cd HT 3.6V 1.5Ah


- Rino versions also available including standard (no-test), addressable and DALI
- Multiple options including higher light output and corridor lens available, contact us for details



RINO M1 301 M AT

Part Code: RDF-R.M1.AT006

Recessed 120mm Round Downlight with Auto-Test and Multiple Options

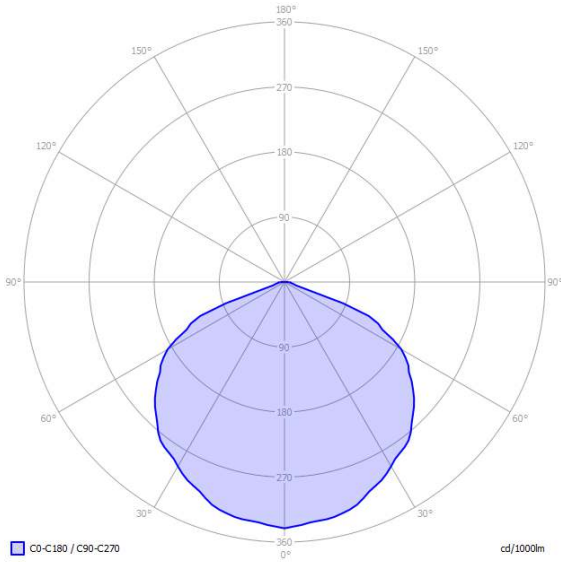

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2.5	3.2	7.0
3.0	3.5	8.0
4.0	3.9	9.5
5.0	3.9	11.2
6.0	3.7	12.2
7.0	3.4	12.6
8.0	3.3	12.4
9.0	3.0	12.0
10.0	2.8	11.2

