


MINIDOZER M-48

(HIGH SPEED OPTION)

TECHNICAL SPECIFICATIONS

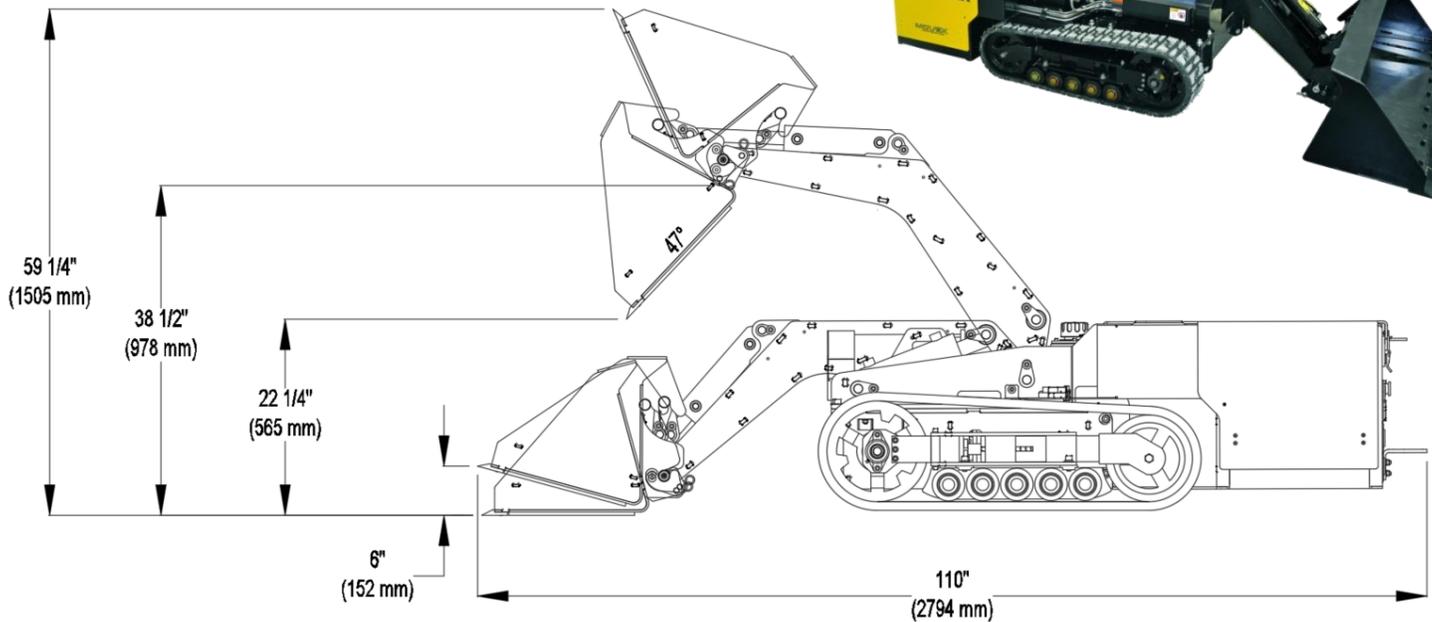

PHYSICAL CHARACTERISTICS		
Frame	Steel	
Cabinet	Aluminum	
Length	110 in	2794 mm
Width	50 in	1270 mm
Height to lowest position (frame)	22 in	559 mm
Height to highest position (frame)	29 in	737 mm
Height (bucket to maximum)	59 1/4 in	1505 mm
Clearance Under Bucket (to maximum height)	38 1/2 in	978 mm
Weight	3612 lb	1638 kg
Turning diameter	163 in	4140 mm
Lifting capacity	1170 lb	531 kg
Bucket capacity	0.175 yd ³	0.133 m ³
Maximum speed (flat surface)	200 ft/min	61 m/min

POWER	
Motor power	3.25 HP (x2)
Hydraulic motor power (bucket)	2 HP (x1)
Gearbox ratio	50:1 (x2)
POWER FEATURES	
Batteries Amperage/Voltage	435 Amps at 6 Volts (x8)
Charger	AC-DC external (x1)
Battery Pack Amperage	870 Amps
Operating Voltage	24 VDC
Continuous Run-Time	Varies according to the operating conditions (Contact Movex Innovation for more information)
Battery Recharging Time	14 hours approx.
Control	Wireless (standard)

The information contained in this document is subject to change without notice.