


DUAL EXPANSION ANCHOR

Shell Expansion Anchor

PRODUCT DESCRIPTION

The Double is a dual expansion machine bolt anchor particularly suited for materials of questionable strength or consistence such as stone. It can be used in solid concrete, block, brick, and stone. Job site tests are recommended when used in base materials of questionable strength or consistence.

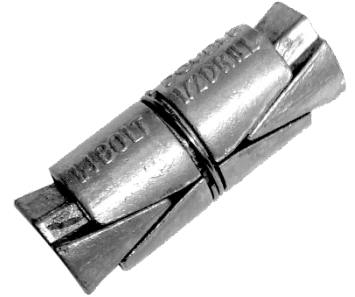

FEATURES AND BENEFITS

- Performs in base material of questionable strength
- Internally threaded anchor for easy removability and service work
- Corrosion resistant body

APPROVALS AND LISTINGS

- Tested in accordance with ASTM E488
- Federal GSA Specification – Meets descriptive and proof load requirements of CID A-A-1923A, Type 3

GUIDE SPECIFICATIONS

CSI Divisions: 03 16 00 - Concrete Anchors, 04 05 19.16 - Masonry Anchors and 05 05 19 - Post-Installed Concrete Anchors. Expansion anchors shall be Double as supplied by DEWALT, Towson, MD. Anchors shall be installed in accordance with published instructions and the Authority Having Jurisdiction.

| PART # | SIZE | LENGTH | DRILL DIA | MIN HOLE DEPTH | CARTON | MASTER |
|--------|-------|----------|-----------|----------------|--------|--------|
| FS9510 | 1/4" | 1-3/8" | 1/2" | 1-1/4" | 50 | 500 |
| FS9515 | 5/16" | 1-5/8" | 5/8" | 1-1/2" | 50 | 500 |
| FS9520 | 3/8" | 2" | 3/4" | 1-3/4" | 50 | 250 |
| FS9530 | 1/2" | 2-1/2" | 7/8" | 2-1/4" | 25 | 250 |
| FS9535 | 5/8" | 2-3/4" | 1" | 2-1/2" | 25 | 100 |
| FS9535 | 3/4" | 3-15/16" | 1-1/4" | 3-1/2" | 10 | 50 |