

12 MP Network Fisheye Camera

Panoramic IR Fisheye Camera with Analytics+



Wiz Mind

WizMind Series devices offer the full complement of Dahua Analytics+ functions for comprehensive, human-oriented analytic solutions. WizMind Series products deliver perimeter protection, vehicle and crowd density statistics, video metadata, and advanced people counting with heat map functionality. WizMind is ideal for complex applications with demanding requirements that need advanced analytic capabilities.

System Overview

Dahua Fisheye Cameras provide detailed panoramic views in a compact, low-profile design. The progressive-scan sensor combined with a fisheye lens provide a high-quality 360° panoramic view without blind spots, making the camera the ideal solution for wide and open areas, such as airports, shopping malls and banks. The camera offers Analytics+ functions at the edge – performing complex real-time perimeter people counting and queue management. The IP67 environmental protection rating and the IK10 vandal resistance ensure the camera operates in the harshest environments.

Functions

People Counting

The camera uses complex real-time people counting algorithms to count the number of people in up to four (4) distinct, user-defined regions. The function can trigger an alarm when a threshold setting is exceeded or when a wait time has exceeded a minimum time. People counting is ideal for measuring the number of customers entering or exiting a location and to monitor groups of people in a distinct location.

Queue Management

This Analytics+ function monitors four (4) user-defined regions where people wait in line (or queue). Queue Management triggers an alarm when the number of people in line exceeds a minimum threshold or when the time a person waits in line is greater than the minimum queue time. The function displays each target in real-time and offers various report output formats.

Intelligent Video System (IVS)

IVS is a built-in video analytic algorithm that delivers intelligent functions to monitor a scene for Tripwire violations, intrusion detection, and abandoned or missing objects. A camera with IVS quickly and accurately responds to monitoring events in a specific area.

- 1/1.7-in. 12 MP Progressive-scan STARVIS™ CMOS Sensor
- 12 MP (4000 x 3000) at 30 fps Maximum Resolution
- Triple Stream Encoding
- Smart H.265+ and Smart H.264+ Dual Codecs
- Built-in Microphone
- Multiple Dewarp Modes
- Analytics+ Functions — People Counting and Queue Management
- Intelligent Video System with Intelligent Business Analysis
- Maximum IR Distance 10 m (33 ft)
- IP67 Ingress Protection and IK10 Vandal Resistance
- Five-year Warranty*



Heat Map

The built-in IVS features heat map functionality that tracks and stores daily, weekly, monthly, and yearly people flow through a defined scene and produces a configurable report. The system uses this data to produce a Heat Map, a two-dimensional representation of data that provides an immediate visual summary of information.

Dewarping Mode

Fisheye dewarping solves the problem of distortion in the circular panoramic view. The camera offers multiple dewarping modes for different installations and configurations with a Dahua NVR or via the Web interface. Each dewarping mode offers options to adjust each scene.

Smart IR

With IR illumination, detailed images can be captured in low light or total darkness. The camera's Smart IR technology adjusts the intensity of camera's infrared LEDs to compensate the distance of an object. Smart IR technology prevents IR LEDs from whitening out images as they come closer to the camera. The camera's integrated infrared illumination provides high performance in extreme low-light environments up to 10 m (33 ft).

Cybersecurity

Dahua network cameras are equipped with a series of key cybersecurity technologies including: security authentication and authorization, access control, trusted protection, encrypted transmission, and encrypted storage. These technologies improve the camera's ability to prevent malicious access and to protect data.

Environmental

Dahua cameras operate in extreme temperature environments, rated for use in temperatures from -30° C to +60° C (-22° F to +140° F). The camera complies with an IK10 impact rating making it capable of withstanding the equivalent of 5 kg (11.02 lbs) of force dropped from a height of 40 cm (15.75 in.). Subjected to rigorous dust and water immersion tests and certified to the IP67 Ingress Protection rating makes it suitable for demanding outdoor applications.

Technical Specification

Camera

Image Sensor	1/1.7-in. 12 MP STARVIS™ CMOS
Total Sensor Pixels	4000(H) x 3000(V)
RAM/ROM	4 GB / 4 GB
Scanning System	Progressive
Electronic Shutter Speed	Auto, Manual, 1/3 s to 1/100,000 s
Minimum Illumination	Color: 0.001 lux at F2.0 (1/3 s, 30 IRE) Color: 0.01 lux at F2.0 (1/30 s, 30 IRE) 0 lux at F2.0 with IR on
S/N Ratio	49.70 dB
IR Distance	Up to 10 m (32.81 ft)
IR On/Off Control	Auto, Manual
IR LEDs	Three (3)

Lens

Lens Type	Fixed
Mount Type	M12
Focal Length	1.85 mm
Maximum Aperture	F2.0
Angle of View	Horizontal: 185° Vertical: 180°
Focus Control	Fixed

DORI Distance¹

Detect (8 ppf)	Observe (19 ppf)	Recognize (38 ppf)	Identify (76 ppf)
40.0 m (131.23 ft)	16.0 m (52.49 ft)	8.0 m (26.25 ft)	4.0 m (13.12 ft)

Video

Compression	Smart H.265+, H.265, Smart H.264+, H.264, H.264H, H.264B, MJPEG
Streaming Capability	Three (3) Streams
Resolution	12 MP (4000 x 3000), 8 MP (2880 x 2880), 2880 x 2160, 3 MP (2048 x 1536), 1.3 MP (1280 x 960), D1 (704 x 480), CIF (352 x 240)

Effective Maximum Resolution, based on Dewarping Mode

Dewarping Mode	Mount Location	Resolution (H x V)
1 Original	Ceiling / Wall	4000 x 3000
1 Panoramic	Ceiling	4096 x 1024
	Wall	2432 x 1216
2 Panoramic	Ceiling	2432 x 2432
1 Region	Ceiling / Wall	1216 x 1216
2 Regions	Ceiling / Wall	2432 x 2432
4 Regions	Ceiling / Wall	2432 x 2432
1 Original + 3 Regions	Ceiling / Wall	2432 x 2432

1. The DORI distance is a measure of the general proximity for a specific classification to help pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specifications and lab test results according to EN 62676-4, the standard that defines the criteria for the Detect, Observe, Recognize and Identify classifications.

Frame Rate	Main Stream	12 MP (4000 x 3000) at 30 fps
	Sub Stream 1	D1 (704 x 480) at 30 fps
	Sub Stream 2	D1 (704 x 480) at 30 fps
Bit Rate Control	CBR, VBR	
Bit Rate	H.265: 52 Kbps to 16384 Kbps H.264: 88 Kbps to 16384 Kbps	
Day/Night	Auto (ICR), B/W, Color	
BLC Mode	BLC, HLC, Digital WDR	
White Balance	Auto, Natural, Street Lamp, Outdoor, Manual, Regional Custom	
Gain Control	Auto, Manual, Gain Priority, Shutter Priority, Aperture Priority	
Noise Reduction	3D DNR	
Motion Detection	Off, On (4 Regions)	
Region of Interest	Off, On (4 Zone)	
Advanced Features	Smart IR	
Privacy Masking	Off, On (4 Zone)	

Audio

Compression	G.711a, G.711Mu, G.726
-------------	------------------------

Network

Ethernet	RJ-45 (10 Base-T / 100 Base-TX)
Protocol	HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/v6, SNMP, QoS, UPnP, NTP
Interoperability	ONVIF Profile S and G, GB/T28181, CGI
Streaming Method	Unicast, Multicast
Maximum User Access	20 Users (total bandwidth: 240 MB)
Edge Storage	FTP Micro SD Card, maximum 256 GB
Web Viewer	IE version 9 or higher Firefox version 48.0.2 or higher Chrome version 48.0.2564.116 or higher
Management Software	Smart PSS, DSS Express, DSS Express S, DSS Pro
Mobile Operating System	iOS, Android
Cybersecurity	Video Encryption, Firmware Encryption, Configuration Encryption, Digest, WSSE, Account Lockout, Security Logs, IP/MAC Filtering, Generating and Importing X.509 Certification, Syslog, HTTPS, 802.1x, Trusted Boot, Trusted Execution, Trusted Upgrade

Certifications

Safety	UL60950-1; CAN/CSA C22.2 No.60950-1-07 EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013 IEC 60950-1:2005 (Second Edition)
Electromagnetic Compatibility (EMC)	47 CFR FCC Part 15 Subpart B EN 55032:2015, Class B; EN 61000-3-2:2014; EN 61000-3-3:2013; EN 55024:2010+A1:2015; EN 55035:2017; EN 50130-4:2011+A1:2015

Interface

Audio	Input: One (1) Channel, RCA plus a Built-in Microphone Output: One (1) Channel, RCAI
Alarm	Input: Two (2) Channels (Wet Contact, 3 V to 5 V) Output: Two (2) Channels (Dry Contact, 30 V)

Electrical

Power Supply	12 VDC or PoE (802.3af, Class 0)	
Power Consumption	12 VDC	Standard: 6.2 W with IR ON: 9.2 W
	PoE	Standard: 9.2 W with IR ON: 12.9 W

Environmental

Operating Conditions	-30 °C to +45 °C (-22 °F to +113 °F), Less than 95% RH
Storage Conditions	-30 °C to +70 °C (-22 °F to +158 °F), Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	IK10

Construction

Casing	Metal and Plastic
Dimensions	ø149.80 mm x 59.80 mm (ø5.90 in. x 2.35 in.)
Net Weight	0.77 kg (1.70 lb)
Gross Weight	1.16 kg (2.56 lb)

Analytics+ Function²

People Counting ³	<p>Delivers accurate flow statistics from four (4) distinct, user-defined region. Issues alarms for the following triggers:</p> <p>Population: keeps a count of the number of people in each region and issues an alarm if a minimum threshold is exceeded.</p> <p>Wait Time: tracks the time each target has stayed within a region and issues an alarm once a target exceeds the minimum wait time.</p>
Queue Management ³	<p>Monitors four (4) user-defined regions where people wait in line (or queue). Issues an alarm for the following triggers:</p> <p>People in Line: the number of people in line exceeds a minimum threshold.</p> <p>Wait Time: time a person waits in line is greater than the minimum queue time.</p>


Intelligent Video System Functions²

IVS triggers an alarm and takes a defined action for the following events:	
Standard Features	<ul style="list-style-type: none"> • Tampering with the camera. • Error writing to an onboard Micro SD card. • Error sending or receiving data over the network. • Unauthorized access to the camera. • IP Address Conflict
Premium Features	
Tripwire	A target crosses a user-defined line.
Intrusion	A target enters or exits a defined perimeter.
Advanced Feature	
Heat Map	Generates a visual representation of data.

2. Perimeter Protection, Queue Management, and the IVS functions cannot be used at the same time, only one Analytics+ or IVS function can be used at a time. In addition, the Smart H.265+ and the Smart H.264+ codec cannot be used simultaneously with either an Analytics+ or an IVS feature.
 3. People Counting and Queue Management functions must be set in the camera's Web interface. A Dahua NVR does not offer these features.

Ordering Information

Type	Part Number	Description
12 MP Fisheye	DH-IPC-EBW81242N	12 MP Panoramic Network IR Fisheye Camera
Accessories, optional	PFA100	Mount Adapter
	PFA105	Mount Adapter
	PFA110	Mount Adapter
	DH-PFA132-E	Junction Box
	PFA150	Pole Mount (use with PFB300C or DH-PFA132-E)
	PFA151	Corner Mount (use with DH-PFA132-E)
	PFB300C	Ceiling Mount (use with PFA100)
	PFB302S	Wall Mount (use with PFA100)
DH-PFB410W	Fisheye-PTZ Integrated Wall Mount	

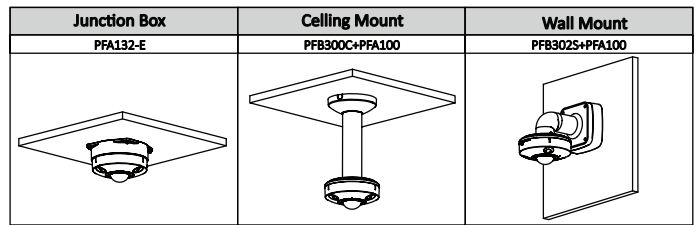

Accessories

Optional:



Dimensions (mm/inch)

