

Linear luminaire designed to be installed at low height on the parapet of roads, the optical design seeks to generate a flush lighting effect on the vehicular surface, while the luminous effect on the perimeter of bridges or road distributors works as a great resource for visual orientation.



### Built in Wireless Control!

Can be controlled through INGY, Casambi, or Bluetooth without the need for a field mounted device.

### Certifications:



### Warranty:

5 Years

### Order Information

Application	UU
Consec.	7161
Color	F - Grafito
CCT	BF - 5000K
Input Voltage	A - 127 - 277V~

Code construction example: UU 7161 F BF A

### Energy Efficiency:

Code	UU 7161 F BF A
Nominal Luminous Flux (lm)	1,397
Power (W)	25.3
System Efficacy (lm/W)	55.2


### Input Current:

Power (W)	25.3
Input Current	0.196 - 0.090

### General Technical Data

Light Source	Built-in LED
Nominal luminous flux (lm)	1,400
System Efficacy (lm/W)	>55
CCT	5000K
CRI	70
Beam Angle	170*20°
Power	25W
Input Voltage	127-277V~
Input Frequency	60 Hz
Power Factor	>0.90
Total Harmonic Distortion (THD)	
Operating Temperature	-10 to 40° C
Driver	Integrated
Control	Wireless, integrated
Lifespan/LED Maintenance	50,000h L70
Housing	Aluminum
Lens Material	PMMA (Acrylic)
Finish	Satin
IP	65
IK	10
Mounting Type	Surface

### Photometric:

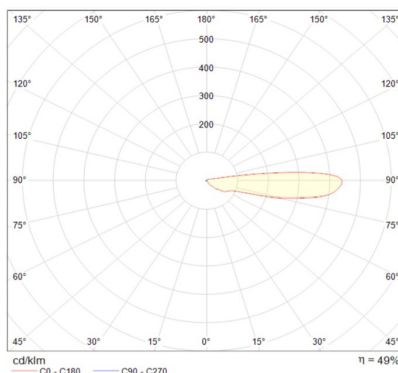

### Dimensions:

