



Triton Barrier® TL-2

Longitudinal Barrier



TRINITY
HIGHWAY

Ahead of the Curve™

Triton Barrier® TL-2

The water filled Triton Barrier® TL-2 is a highly portable, water filled barrier that consists of a number of interlocking, 6.5 ft. (2 m) barrier sections made of polyethylene plastic with an internal steel framework. The Triton Barrier's performance exceeds NCHRP Report 350 Test Level 2, 45 mph (70 km/h) for passenger vehicles and light weight pickup trucks.



COST EFFECTIVE

Features


- Steel reinforced, polyethylene barrier sections.
- Compliant for water filled longitudinal work zone barriers.
- Easily upgraded to NCHRP Report 350 Test Level 3 system.
- Last 10 sections of Triton Barrier Test Level 2 serve as its own end treatment.
- Transition hardware available for attachment to guardrail or concrete barrier.
- Cost effective compared to portable concrete barriers.
- Effective in all weather conditions.

Assembly and Maintenance

- Deployment includes:
 - Unload
 - Position and pin
 - Fill with water
- Certified as its own end treatment, saving deployment time and hardware expenses.
- Lightweight sections unloaded and positioned by hand, no cranes or other equipment required for assembly.

Specifications

- 6'6" (2 m) Long
- 21" (533 mm) Wide
- 32" (813 mm) High
- 140 lbs. (65 kg) Empty Weight
- 1,350 lbs. (610 kg) Weight With Water
- 145 gal. (550 liters) Water Ballast

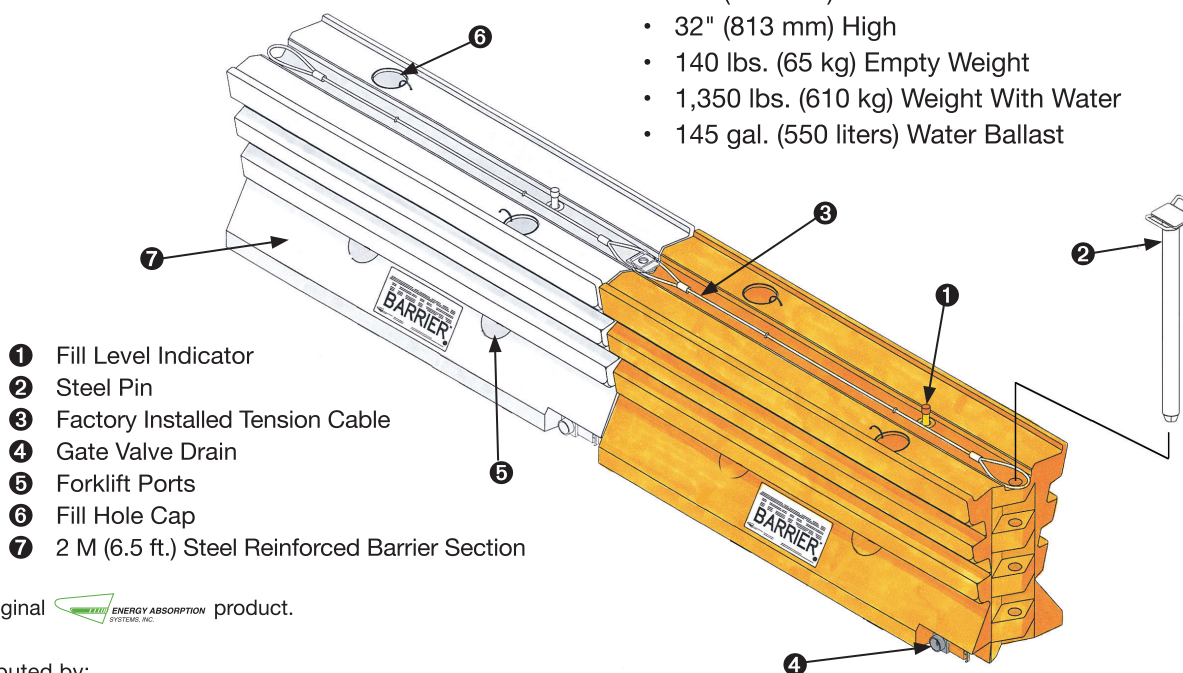

An original  ENERGY ABSORPTION SYSTEMS, INC. product.

Distributed by:



(800) 960-7788

GULF MATERIAL SALES, LLC

www.trinityhighway.com

1.888.323.6374

5-14



**TRINITY
HIGHWAY**