




NEXGEN
Smart Building Solutions




Smart Home
Residential Solutions





INDEX

Touch Panel	10
Topology	12
Products	14
Panel Devices	59
Certificates	60
References	61

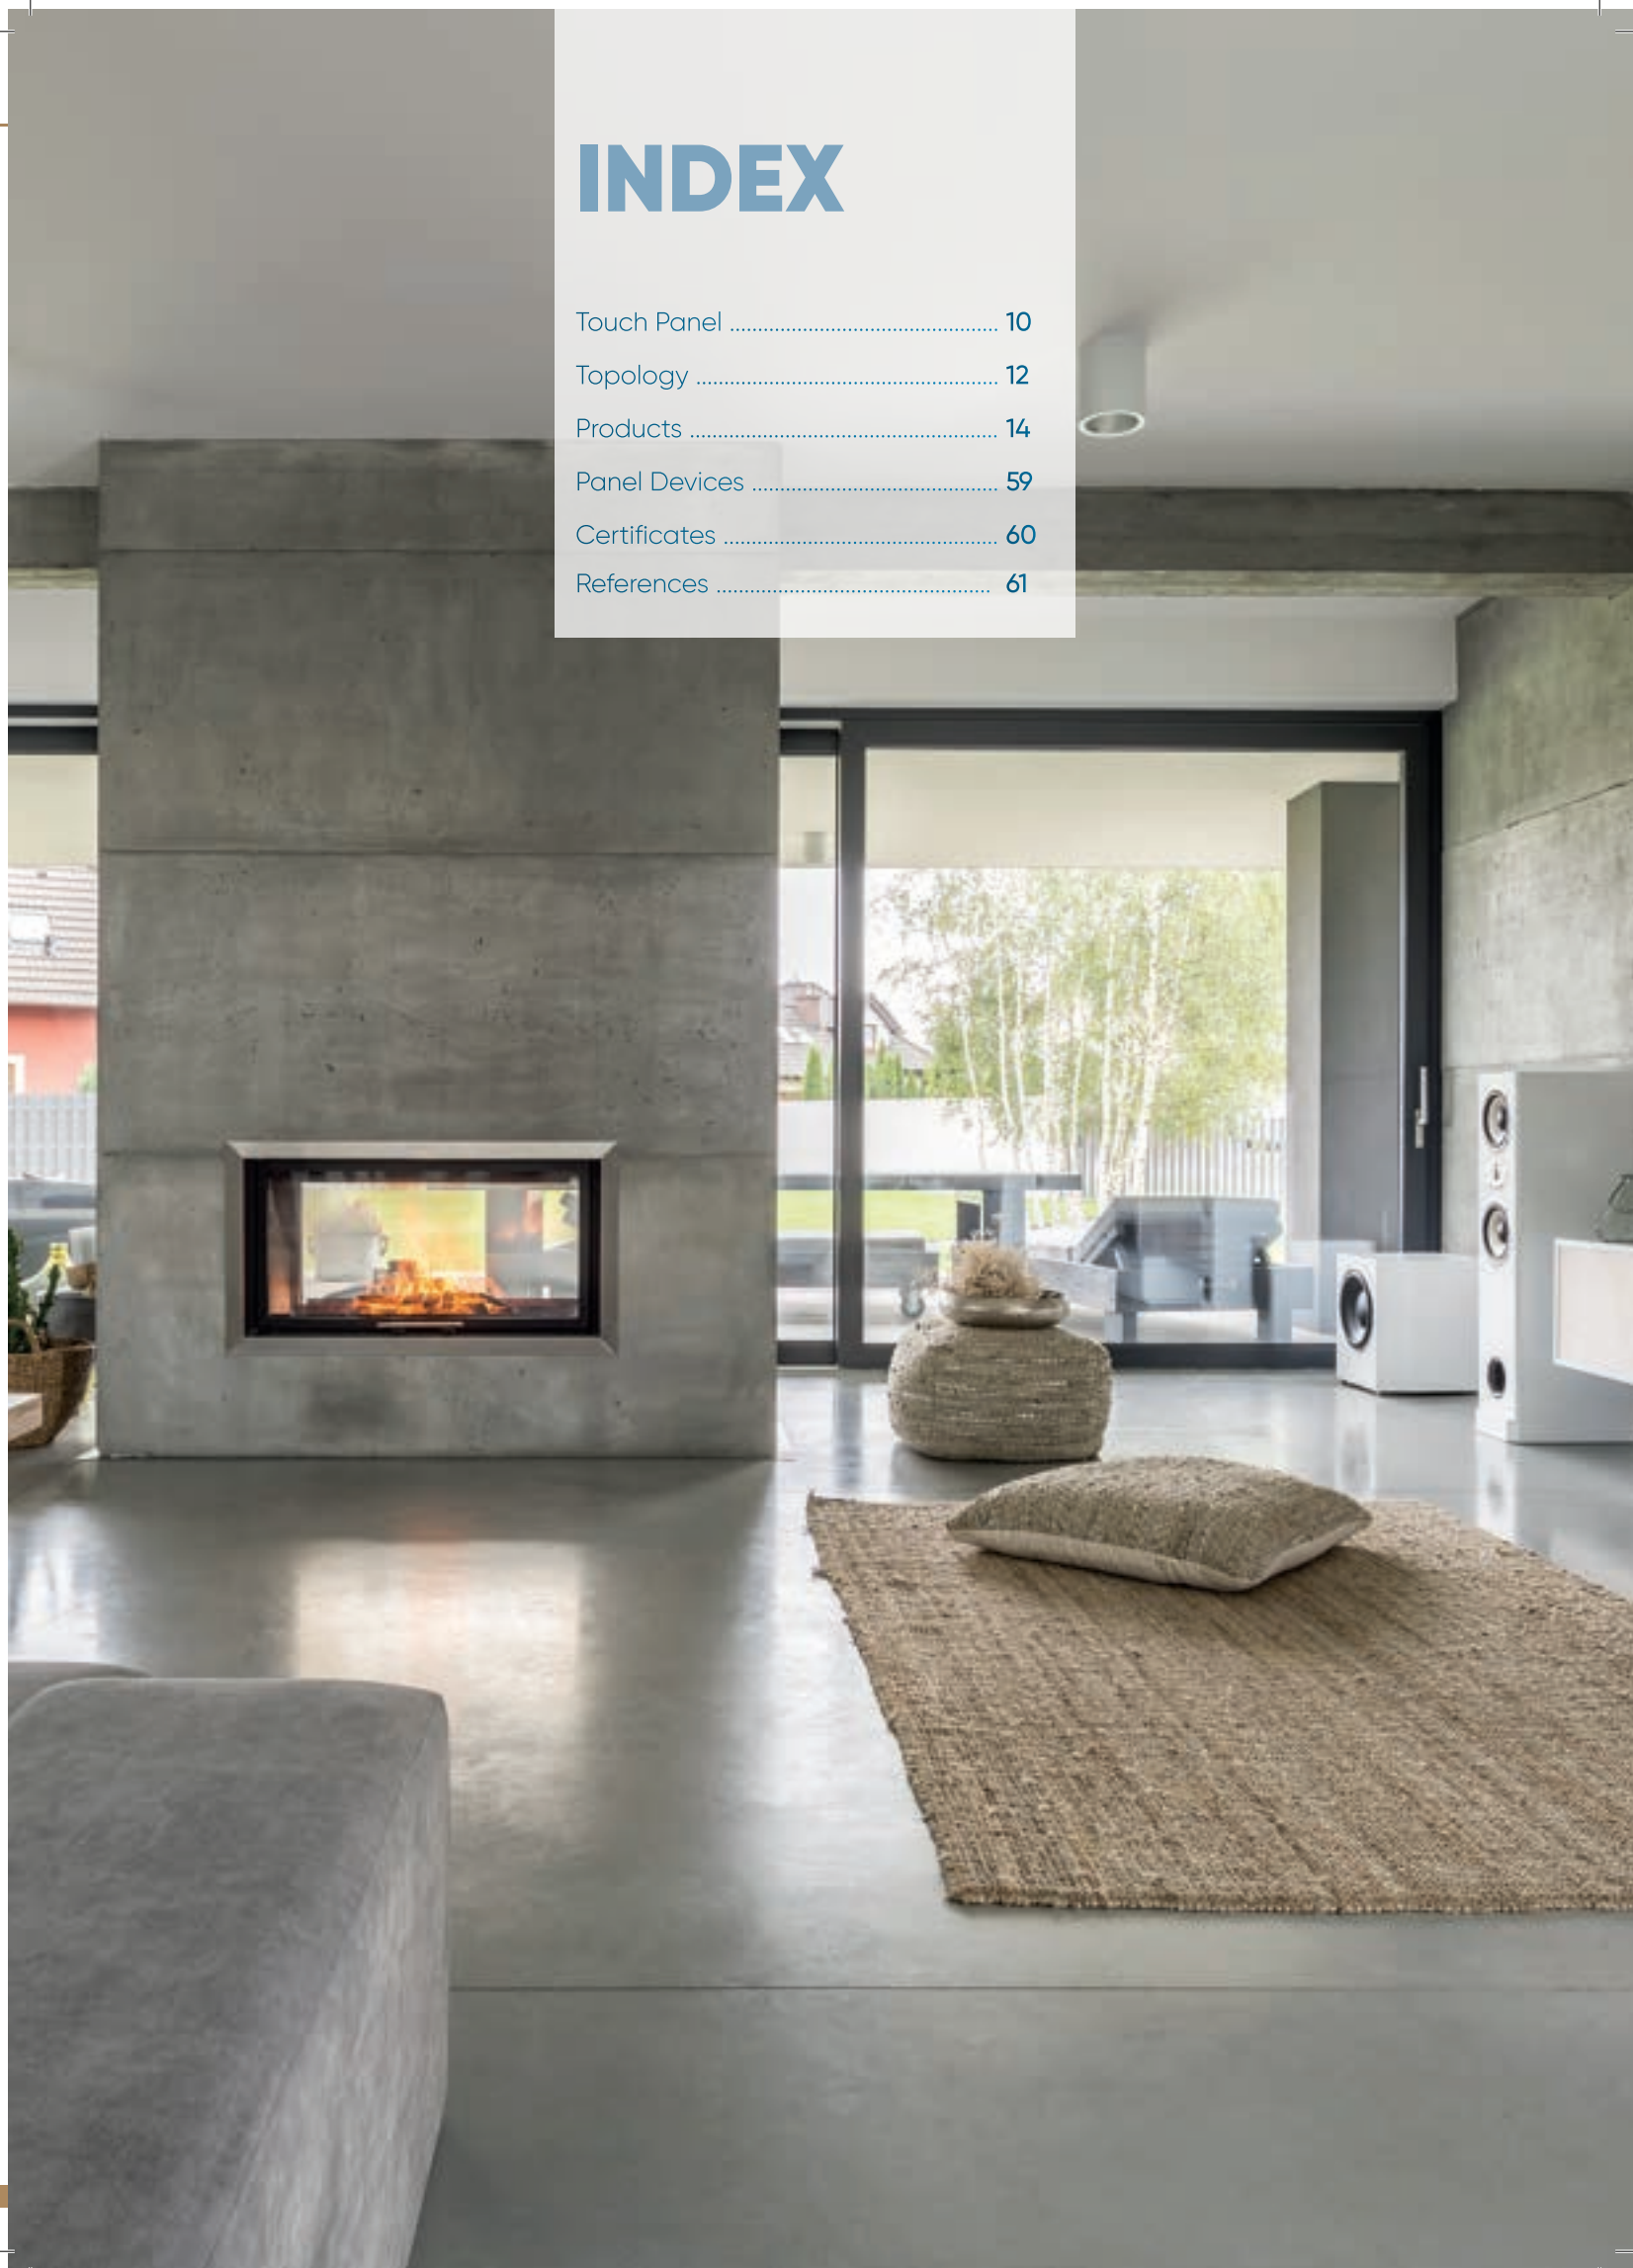



EAE KNX Smart Home and Residential Solutions offers the best user experience with a wide range of products and customizable technological and stylish design of the products.

EAE's Smart Home and Residence solutions are remarkable for users and architects with a variety of materials and colors compatible with the interior, as well as providing ease of use.

Products are based on the worldwide KNX standard and enable the system to be expanded with other KNX manufactured products.

EAE products were used in these projects.

Al Jowhara Tower - Jeddah

İq Bankası Genel Merkez - İstanbul

Allianz Arena - Munich

Jewel Twin Towers - Dubai

1973
Establishment date

270.000 m2
Production area

Products used in
100+ Countries

More than 2,500
Employees

6
Factory

The infographic features a world map with five callout boxes connected by a horizontal bar with icons: a handshake, a group of people, a factory, a building, and a box. The callouts provide key statistics: 1973 Establishment date, 270.000 m2 Production area, Products used in 100+ Countries, More than 2,500 Employees, and 6 Factory.

EAE group of companies have over 2,500 employees worldwide and EAE products are used in more than 100 countries. EAE Group has over 30 patents, 300 brands and 100 industrial designs.

Trump Towers - Istanbul

Socar Tower - Baku

Almos Tower - Dubai

Astoria - Istanbul

EAE

KNX Member & Training Center

800.000+ Active device in the world

Design, Production In Istanbul - Turkey

KNX

40+ Export Countries

100+ Expert Technical Team

As EAE Technology, we provide innovative and value-added solutions for KNX applications. All our products are designed, developed, manufactured and tested in our headquarters in Istanbul, Turkey. EAE Technology products are in compliance with international open standards such as KNX, DALI, TCP/IP and WiFi.

EAE Technology is a member of KNX Association and an authorized KNX training center since 2012.

The logo for MIOLA TOUCH PANEL features a stylized blue and white icon of a touch panel on the left. To its right, the word "MIOLA" is written in a large, bold, white sans-serif font, with a small cluster of white dots above the letter 'I'. Below "MIOLA", the words "TOUCH PANEL" are written in a smaller, white, all-caps sans-serif font.

MIOLA
TOUCH PANEL






With Miola Panel, you can easily control your home!

You will be able to receive all the notifications you specify and want to receive from the mobile application, and you will be able to easily learn all the details you follow with the push-notification feature.

Thanks to the Cloud server, you will not need an extra server!



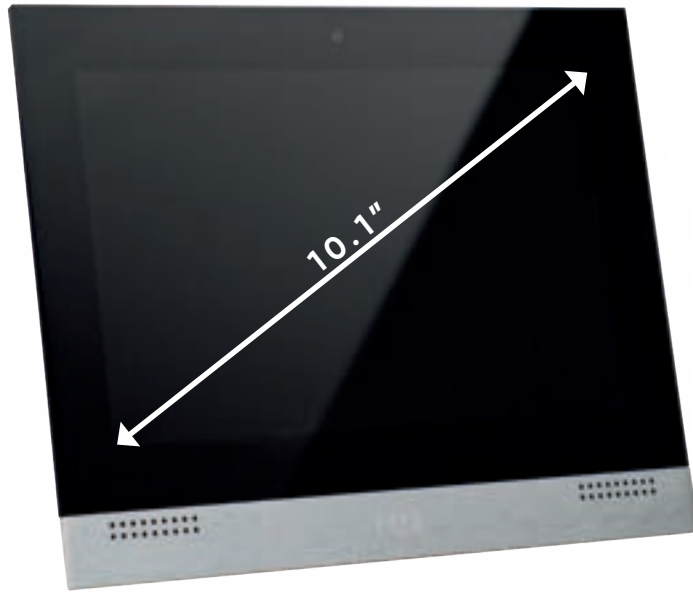

Color Options



Natural




Anthracite

Miola Technical Data

SCREEN SIZE	7" MIOLA KNX-TP	10.1" MIOLA KNX-TP
CPU	PX30 Chipset	PX30 Chipset
Memory	1GB	1GB
Hard Disk	8GB EMMC	8GB EMMC
Operating System	Android 8.0	Android 8.0
Power	12-30 VDC	12-30 VDC
Resolution	600x1024px	1280x800px
Touch Panel	Project Capacitive Touch	Project Capacitive Touch
Microphone	1 with Echo Cancellation	1 with Echo Cancellation
Speaker	1x8 Ohm - 2 Watts	1x8 Ohm - 2 Watts
Input	5 Digital Inputs	5 Digital Inputs
KNX Bus Connection	KNX - TP	KNX - TP
LAN	2	2
Dual Network Connectivity	Yes	Yes
Drivers	EAEOS Operating System Drivers	EAEOS Operating System Drivers
Max Accessory Limit	254	254
Max Room Limit	254	254
Intercom Standart	SIP 2.0	SIP 2.0
Onwall Dimensions	140 x 235 x 4 mm	264 x 208 x 4 mm

* High voltage and overcurrent protection, insulated

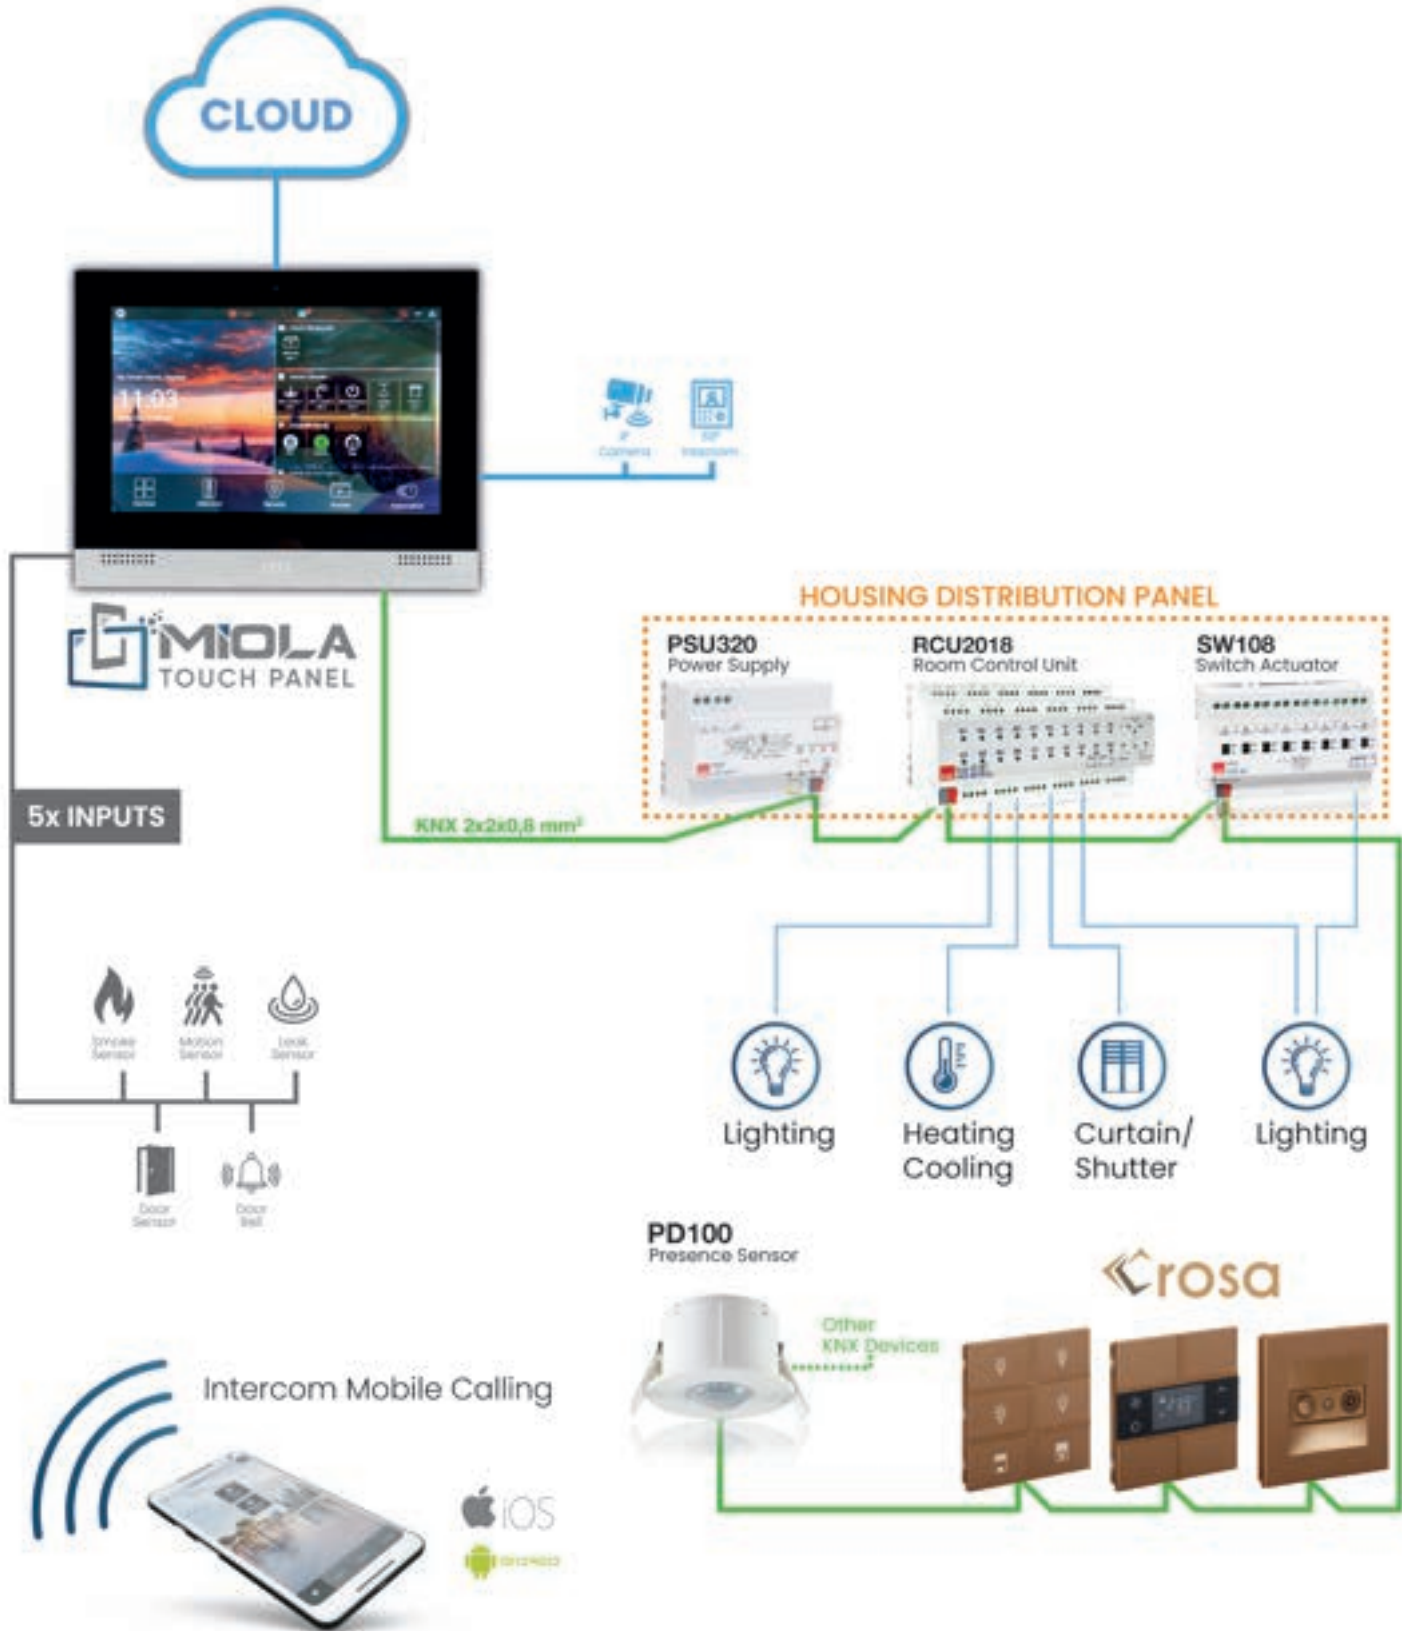

Cloud Server

Thanks to Peer to Peer connection, SIP calls are made directly between devices without the need for a SIP server.



Intercom Call on Mobile

Intercom calls which are not answered from the panel are directed to mobile devices. Call on Mobile feature makes you sure that your guests will never stay at the door!

Intercom

You can use your Miola touch panel to communicate with outdoor intercom units and open apartment doors.



Push-Notification

Any information sent to the panel or created on the panel can be sent to mobile devices as a notification even if the application is not in the background.

Mobile Integration

Manage lighting, climate, blinds, alarms, intercom, with your mobile devices. You can do anything you do with touch panel with using your smartphone.






rosa
Add Value!

KNX Thermostat | Switch | Socket



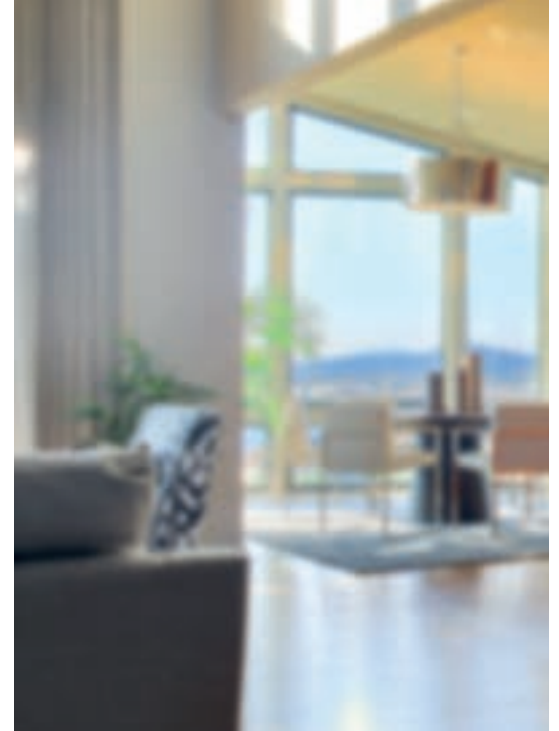



Thermostats

Thermostat and switching control from one point with Rosa Thermostats.



Switches

Lighting, shutter/blind, scene call, speaker and DND/MUR control with customizable Rosa keypads.



Sockets

Various color options in UK, EU and universal standards.





Thermostats

Elegant and Minimalist Design

Rosa thermostats are designed for the needs of modern buildings. Rosa's intuitive design allows all ages to control their living space easily. New generation frameless design fits architects' expectation and getting their compliments.



Touch operated



Icon options



Brushed metal surface



Navigation LEDs



Thermostat and switch together



Feedback LEDs



Additional heating-cooling control



Away, comfort, night and protection modes



Frameless, minimalist design



Independent programmable buttons



Fully automatic heating-cooling transition



Various color option



Rosa
1 Fold Metal Bronze Thermostat

2 Fold - Anthracite



2 Fold - Bronze



1 Fold - Natural



2 Fold - Gold





«rosa
crystal

Thermostats

Elegant and Minimalist Design

The Rosa Crystal switch and thermostat series, which has the same features as the metal ones in technical terms, can also be adapted to different concept designs with glass surface option. Rosa Crystal can be colored according to the selected RAL code, adapts to the demands of the interior designers and fast changing trend.



Touch operated



Icon options



4mm tempered glass surface



Navigation LEDs



Thermostat and switch together



Feedback LEDs



Additional heating-cooling control



Comfort, night, protection and away modes



Frameless, minimalist design



Independent, programmable buttons



Fully automatic heating-cooling transition



Various color option



Rosa
2 Fold Black Crystal Thermostat

2 Fold - Black



2 Fold - White



1 Fold - Black



1 Fold - White



rosa metal Switches

Elegant and Minimalist Design

Rosa metal switches with 5 different color options add harmony and enrich to different designed homes, offices and hotel rooms. Rosa buttons can be configured independently and gives chance to users to control up to 6 different objects.



Touch operated



Icon options



Brushed metal surface



Navigation LEDs



Frameless, minimalist design



Feedback LEDs



Independent, programmable buttons



Various color option



Rosa
2 Fold Metal Natural Switch

Single Fold - Natural



1 Fold - Anthracite



2 Fold - Gold



3 Fold - Bronze



«rosa crystal Switches

Elegant and Minimalist Design



Rosa Crystal touch switches which has the same features as the metal ones adorn hotel rooms, homes and commercial buildings with its unlimited color options and 4mm tempered glass surface. Users are just defining the RAL code for coloring up the device.



Touch operated



Icon options



4mm tempered glass surface



Navigation LEDs



Frameless, minimalist design



Feedback LEDs



Independent, programmable buttons



Various color option



Rosa Crystal
2 Fold White Crystal Switches

3 Fold - White




2 Fold - Black



1 Fold - White



Single Fold - Black

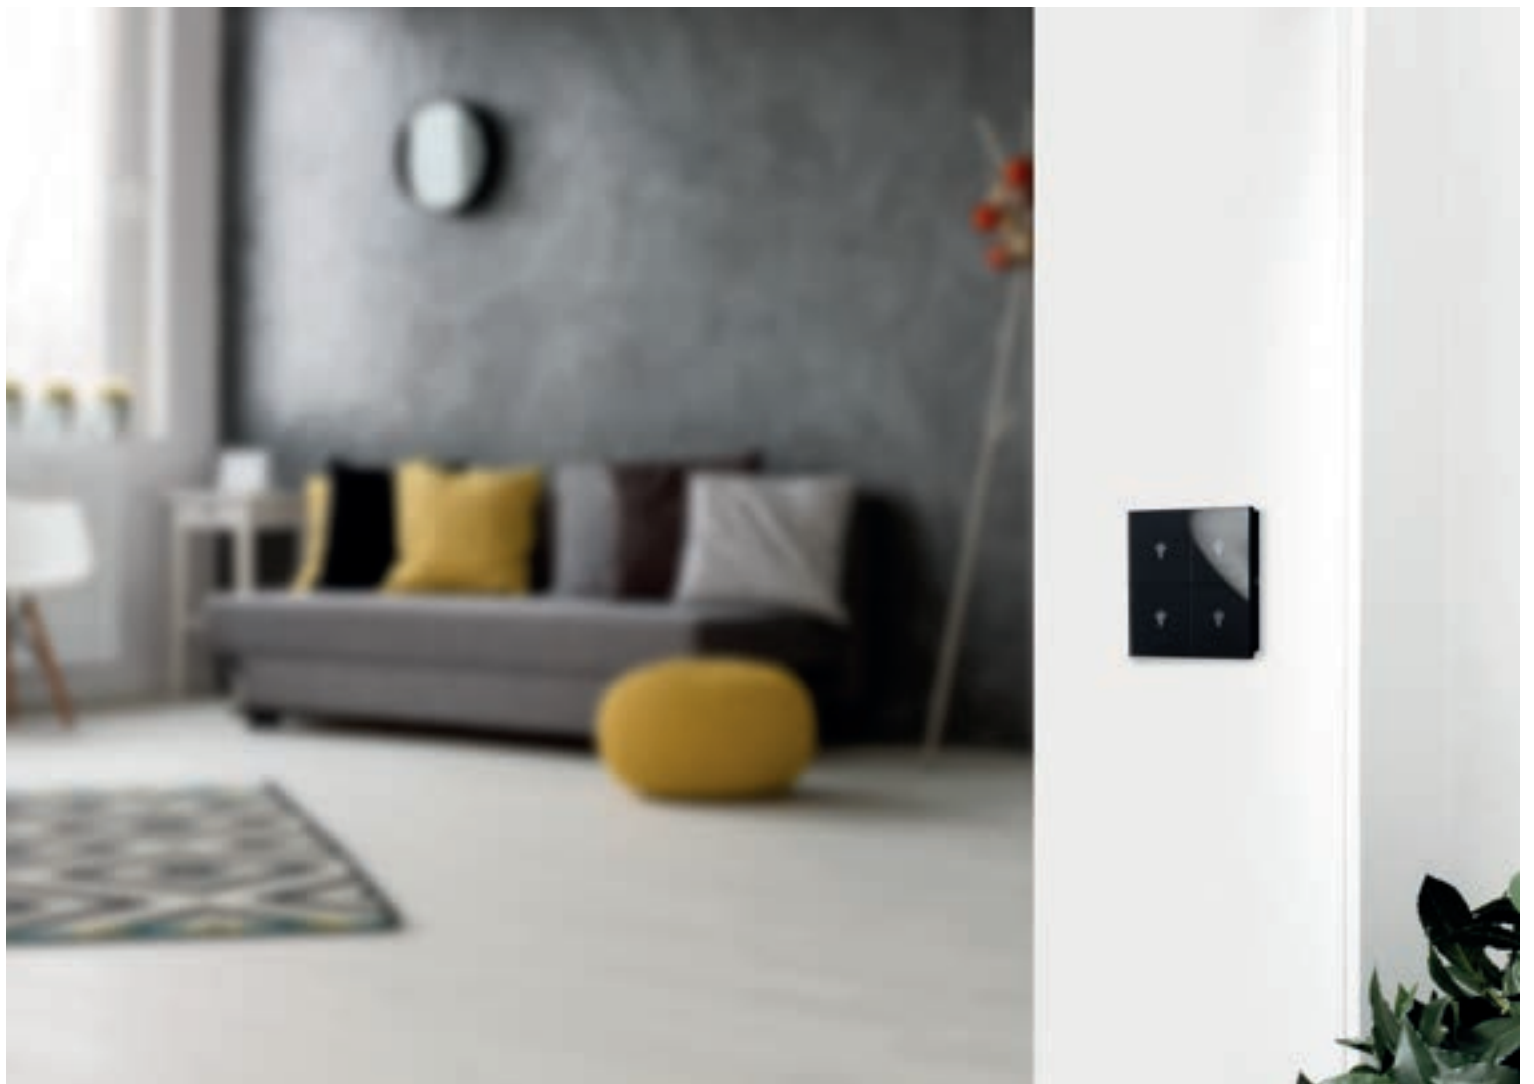



Touch operated design...

Precision detection for glass and metal surfaces.



Brushed metal surfaces...

Rosa brushed metal thermostats contain 4 different color alternatives as natural (silver), gold, bronze and anthracite



Independent programmable buttons...

Each folds can be programmed as independent buttons.





All in one...

Rosa offer switching and thermostat function controls from one point.

- Lighting
- HVAC Control
- Shading
- DND/MUR
- Scene Call



Frameless design...

85 x 85mm frameless design



Unlimited color options...

All RAL codes can be applied



rosa
crystal



High quality raw materials...

7000 series aluminium is used for Rosa switch & thermostat.



Additional Heating & Cooling...


In built temperature sensor is used for Rosa serial.

Rosa thermostats have automatic heating/cooling change-over function. Additional heating/cooling units can be jointed to the system.



4 mm tempered glass...

Conductive material coated glass surface is used for Rosa crystal

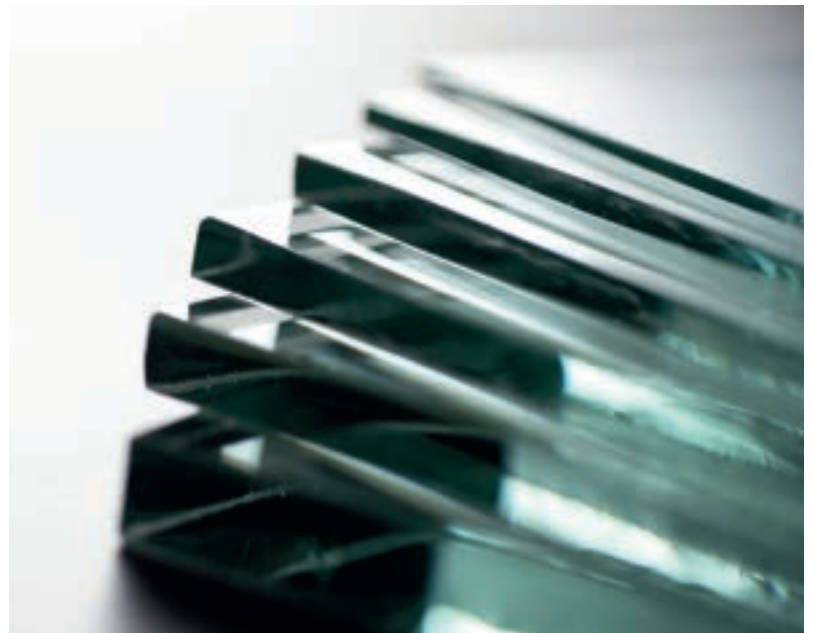



Status LEDs...

Users can check the status of lighting, shutter/blinds and air conditioners in their living spaces with status LEDs.



Navigation LEDs...

It is easy and safe to reach your thermostat or switch in dark with the navigation LED on Rosa.



Customizable icon options...

Rosa offers customized icon options for glass and brushed metal surface.





Sockets

Elegant and Minimalist Design

Rosa metal, crystal framed sockets are designed for 4 different standards.

- ✓ Universal Standard
- ✓ Modular Standard
- ✓ British Standard
- ✓ European Standard




Universal Standard

2M Socket - Natural




2M Socket - Bronze



3M Socket + Blanking Module - Natural




	a	h
2M	85	85
3M	124	85
4M	144	85
6M	190	85



4M Socket - Gold



6M Socket - Anthracite

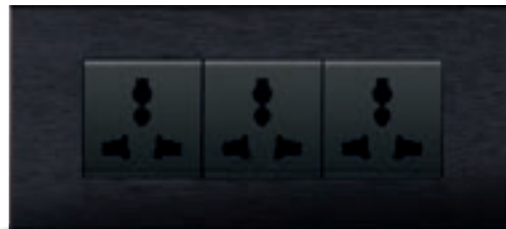


Modular Standard

1M Data and Blanking Module - Natural




2M USB + Data - Bronze



3M Shaver Socket- Natural



	a	h
1M	85	85
2M	85	85
3M	124	85
4M	144	85
6M	190	85



4M Universal Socket + SAT/TV - Gold



6M Socket + Socket + SAT + Blind Cover - Anthracite



Dimensions



British Standard

1 Gang Socket - Bronze




1 Gang Socket - Natural



1 Gang Light Switch - Bronze



	a	h
1 Gang	92	85
2 Gang	152	85



2 Gang Socket - Anthracite



2 Gang Socket+USB - Gold



European Standard

Single Data - Bronze



Double Socket + Phone - Gold




Triple Socket + TV - Natural



Quadruple Socket + Data + TV - Bronze




Dimensions	a	h
Single	85	85
Double	156	85
Triple	227	85
Quadruple	298	85
Quintet	369	85



Quintet Socket+DATA+Sat - Anthracite



Single Socket - Black Glass



Double Socket+TV/SAT - White Glass




Triple Socket+SAT+Socket - Black Glass



Quadruple Socket+Socket+TV/SAT - White Glass



	a	h
Single	85	85
Double	156	85
Triple	227	85
Quadruple	298	85
Quintet	369	85




Quintet Socket+DATA+Socket+Sat - Black Glass




rosa THERMOSTAT and SWITCH ICON OPTIONS

		Light On / Off			Volume Up / Down
		Light Dim Up / Dim Down			Thermostat
		Blind Up / Blind Down			MUR / DND

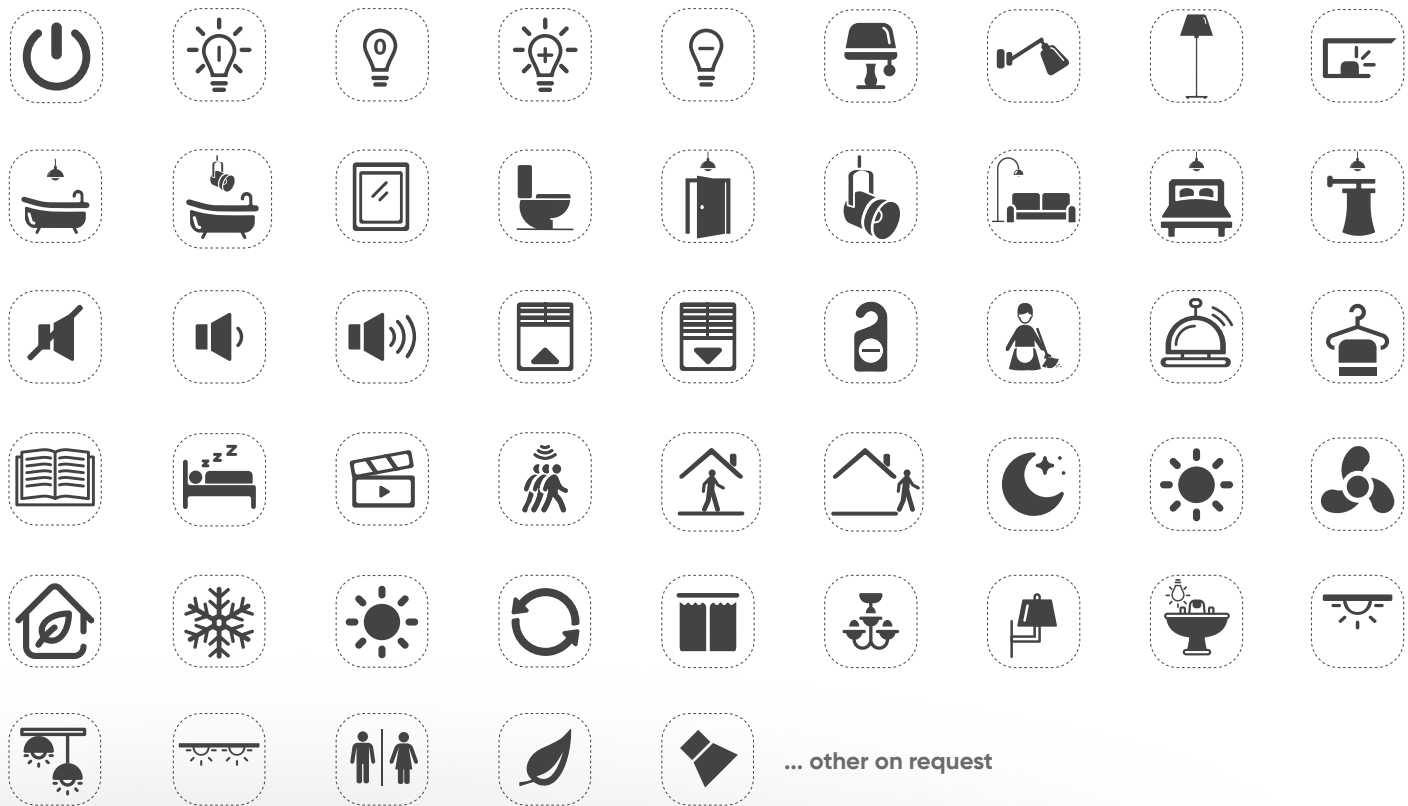


rosà THERMOSTAT and SWITCH PRODUCT CODE LEGEND

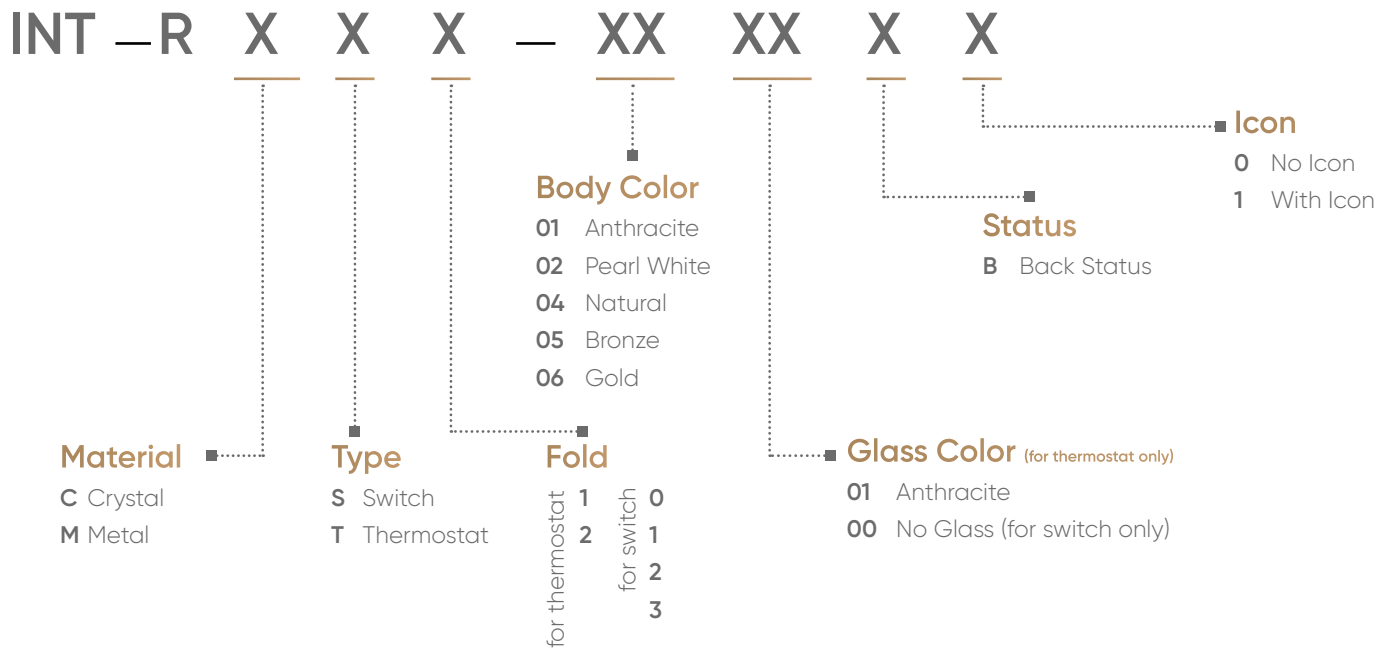

Note: Icon drawing and front status options can not be applied at the same time on the same product.



Sample Order Code

INT-RMT2-0401B1

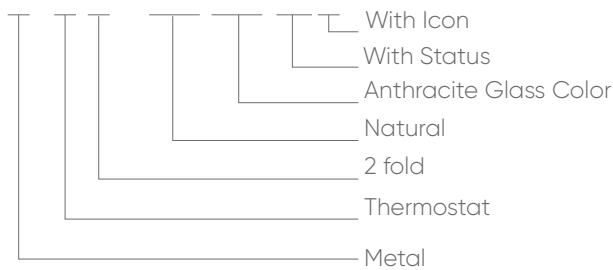

Sample Order Code

INT-RMS2-0100B1

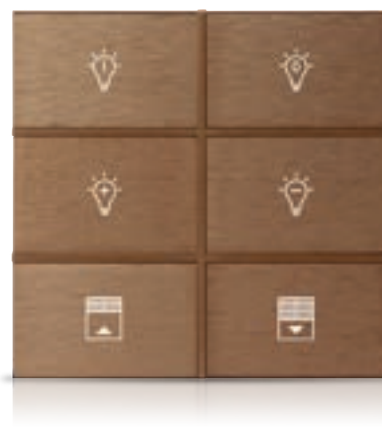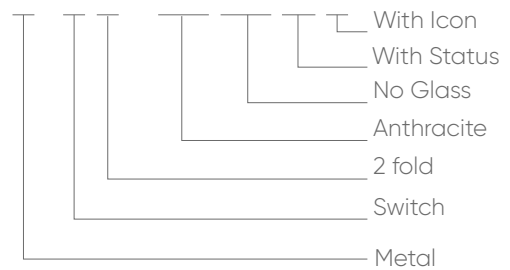


rosa THERMOSTAT TECHNICAL SPECIFICATIONS




- Can be configured with ETS5.
- Serial thermostat with metal and glass touch-button
- Temperature control via digital LCD
- Internal temperature sensor (°C/ °F)
- Adjustable fan speed (1, 2, 3, Automatic)
- Multiple operation modes (Comfort, Night, Outdoor, Indoor)
- Fully automated operation feature (hot-cold transition)
- Control of all HVAC units including VRF-VRV and air conditioning devices
- PI relative, PI on-off (PWM), On/Off, Fan coil, Split unit controls
- Easy installation to 60x60 mm standard switch junctions
- 2 dependent or 4 independent programmable buttons can be programmed for various functions.
 - Switching,
 - Dimming,
 - Shutter/Blind control,
 - Value and priority assignment,
 - Scene control,
 - Status notification LED

Protection type	IP 20	EN 60529
Safety class	II	EN 61140
Supply	Voltage Range	21-30V DC, Supply from EIB/KNX line
	Supply voltage	<10 mA
Temperature	Operating	-5° C + 45° C
	Storage	-25° C + 55° C
CE	In accordance with EMC guideline and low voltage regulation	
Case type to be used	60mm flush-mounted and surface-mounted safes between two mounting screws according to European standards	




Dimensions (mm)	a	b	h
1 Fold Thermostat	85	11	85
2 Fold Thermostat	85	11	85

Assembly Detail



Important note!
The optimum distance between the two thermostats should be at least **120 mm** from center to center.




rosa SWITCHES TECHNICAL SPECIFICATIONS




- Can be configured with ETS5.
- Serial switches with metal and glass touch-button
- Large collection option up to 4 Folds
- Product options with and without notification LED
- Optionally, icon branding is available.
- Different color options
- Easy installation to 60x60 mm standard switch junctions
- Channels are identical, each with the following functions;
 - Switching,
 - Dimming,
 - Shutter/Blind control,
 - Value and priority assignment,
 - Scene control,
 - Status notification LED

Protection type	IP 20	EN 60529
Safety class	II	EN 61140
Supply	Voltage Range	21-30V DC, Supply from EIB/KNX line
	Supply voltage	<10 mA
Temperature	Operating	-5° C + 45° C
	Storage	-25° C + 55° C
CE	In accordance with EMC guideline and low voltage regulation	
Case type to be used	60mm flush-mounted and surface-mounted safes between two mounting screws according to European standards	

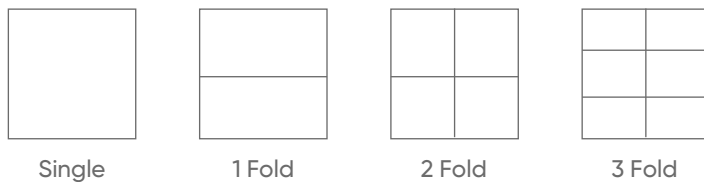


Dimensions (mm)	a	b	h
Single Switch	85	11	85
1 Fold Switch	85	11	85
2 Fold Switch	85	11	85
3 Fold Switch	85	11	85

Assembly Detail



Important note!
The optimum distance between the two switches should be at least **120 mm** from center to center.







 **oria**
Live in Comfort!

KNX Thermostat | Switch | Socket





Thermostat

All devices in your home are under your control with Oria thermostats.




Switch

Control lights, blinds with Oria switches with one press.



Socket

Socket group with eye catching design for perfect harmony.

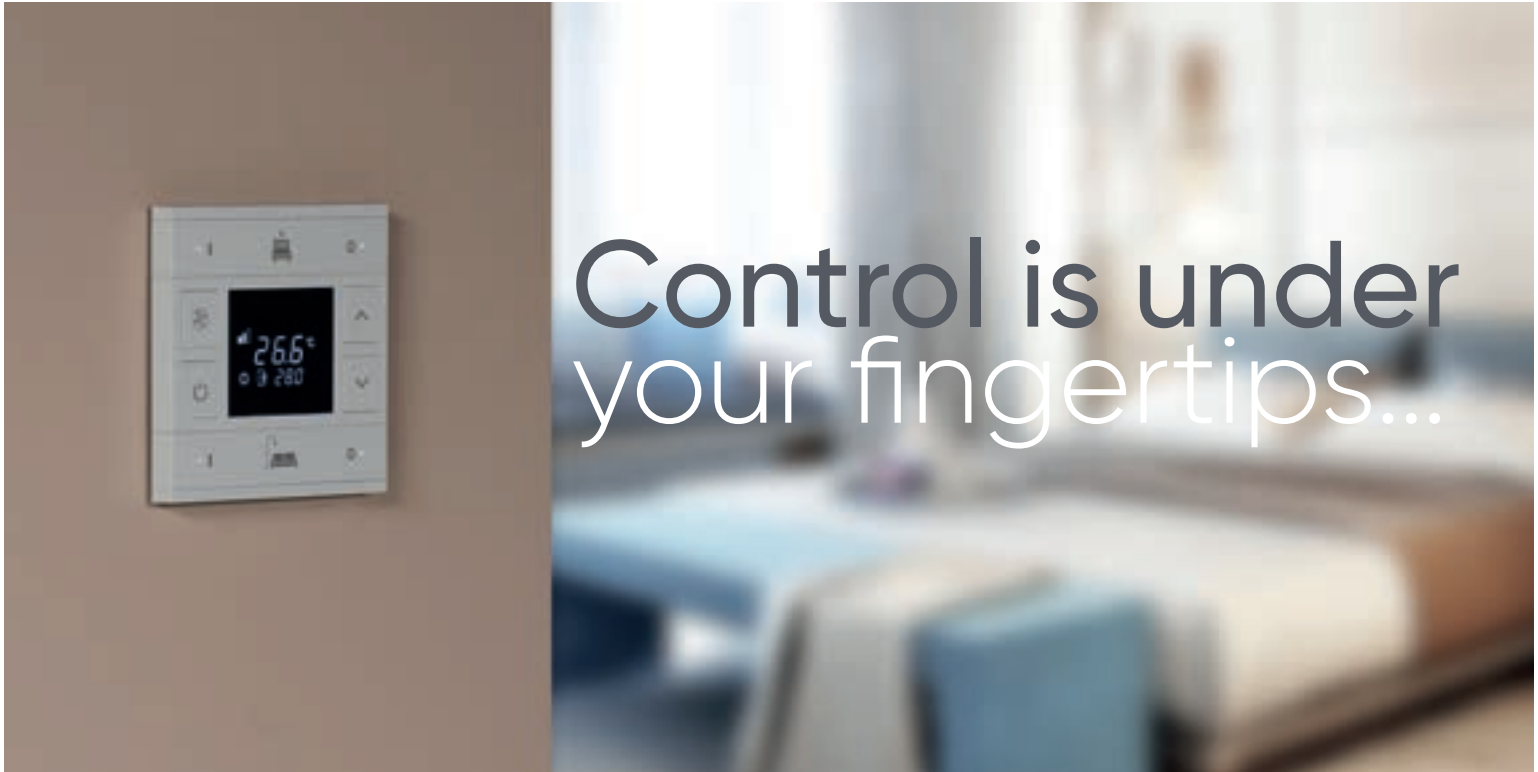

Control is under
your fingertips...


A simple touch, unlimited comfort

Thermostats

Expandable up to 4 folds, Oria thermostat provide a wide collection of possibilities for all spaces where both thermostats and programmable switches are needed at the same time.

Oria thermostats can perform all needed operations with a single touch. Programmable buttons on Oria thermostats can control comfort and energy saving needs such as lighting, shutter/blind, scene call, speakers and panic button for you.



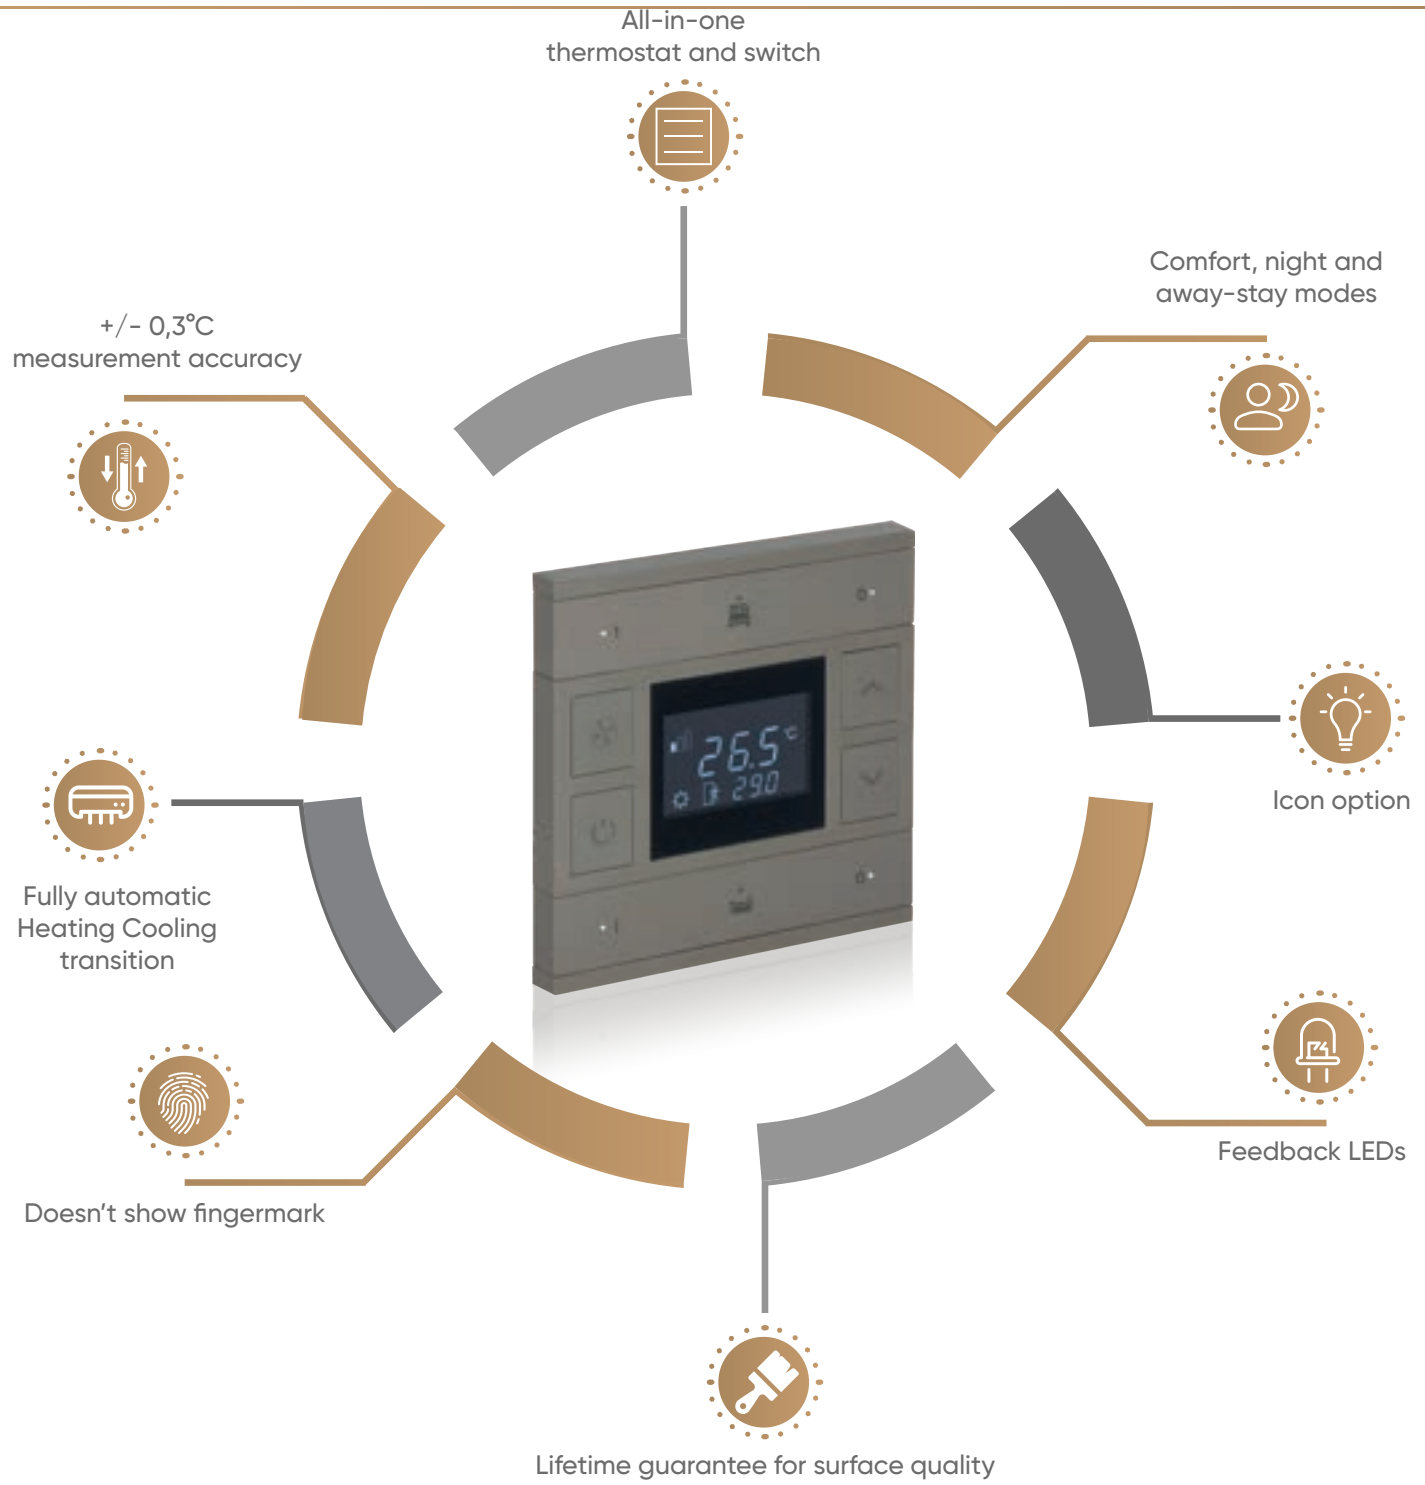

2 Fold Anthracite



2 Fold Pearl White



2 Fold Mustang Gray



3 Fold Pearl White



4 Fold Antique





A simple touch, unlimited comfort

Switches

The new generation of Oria switches adds a simple and elegant touch to the world of users while fulfilling unlimited needs with its design. With rich collection options expandable to 12 buttons in a single frame, enjoy one-point management of on-site lighting, heating-cooling, shutter-blind, speakers, scene call and panic buttons controls.







Retain Design Style...

A simple touch, aesthetic integrity

Sockets

As the supplementary item for the new generation of thermostat and switch series, Oria power outlets reflect the integrity of your space.



TV/SAT
Single Frame Antique



Socket + Socket + SAT + TV
6M Frame Antique



Data+Socket
Double Frame Pearl White



Socket + SAT + TV
4M Frame Anthracite



Socket+TV/SAT
Tripple Frame Anthracite



Socket + TV
3M Frame Pearl White



DATA+Socket+TV/SAT
Quadruple Frame Pearl White



SAT + TV
2M Frame Mustang Gray



TV/SAT+Socket+Data+UPS
Quintet Frame Mustang Gray



USB
1M Frame Pearl White




oria THERMOSTAT and SWITCH ICON OPTIONS

	💡	0	Light On / Off
^	💡	v	Light Enhance / Dim
^	🔊	v	Volume Increase / Decrease
🎬		🎬	Scene
^	🔒	v	Shutter-Blind
^	🔒	v	Shutter-Blind Wing
🏠		🏠	Away - Stay




oria THERMOSTAT and SWITCH PRODUCT CODE LEGEND

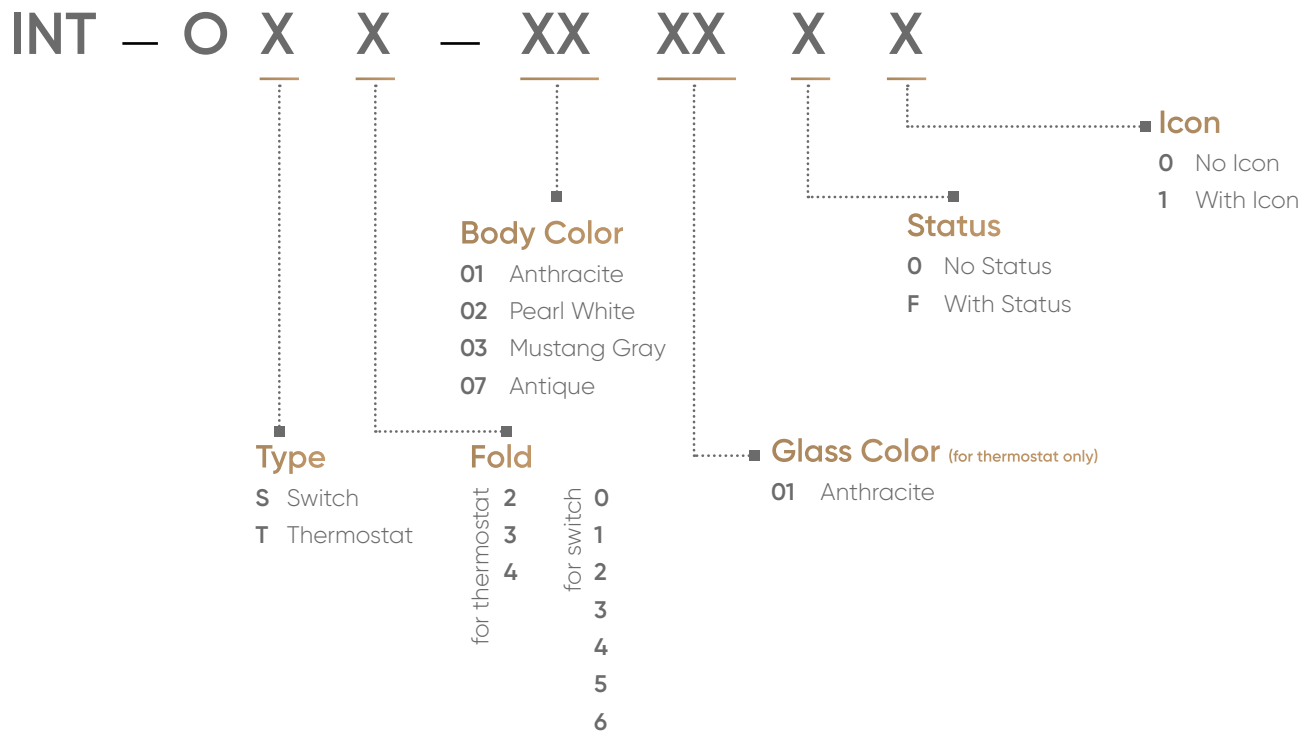

Note: Icon drawing and front status options can not be applied at the same time on the same product.


Sample Order Code

INT-OT2-0101F0

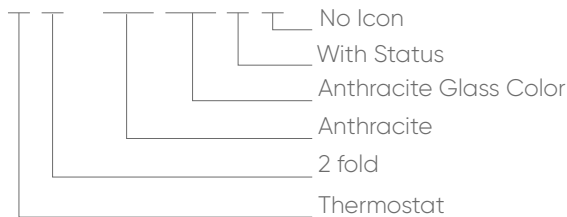

Sample Order Code

INT-OS2-0300F0

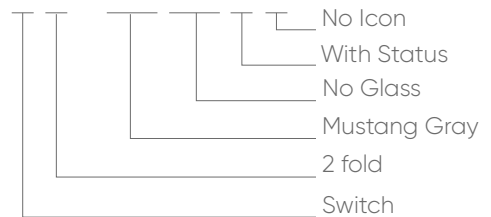


oria THERMOSTAT TECHNICAL SPECIFICATIONS




- Can be configured with ETS5.
- Serial thermostat with plastic push-button
- Temperature control via digital LCD
- Internal temperature sensor (°C/ °F)
- Adjustable fan speed (1, 2, 3, Automatic)
- Multiple operation modes (Comfort, Night, Outdoor, Indoor)
- Fully automated operation feature (hot-cold transition)
- Control of all HVAC units including VRF-VRV and air conditioning devices
- PI relative, PI on-off (PWM), On/Off, Fan coil, Split unit controls
- Easy installation to 60x60 mm standard switch junctions
- 2 dependent or 4 independent programmable buttons can be programmed for various functions.
 - Switching,
 - Dimming,
 - Shutter/Blind control,
 - Value and priority assignment,
 - Scene control,
 - Status notification LED


Protection type	IP 20	EN 60529
Safety class	II	EN 61140
Supply	Voltage Range	21-30V DC, Supply from EIB/KNX line
	Supply voltage	20 mA
	Power consumption	20 mA x 30V
Button operation life	100.000	
Temperature	Operating	-5° C + 45° C
	Storage	-25° C + 55° C
	Transport	-25° C + 70° C
CE	In accordance with EMC guideline and low voltage regulation	



2 Fold




3 Fold




4 Fold

Dimensions (mm)	a	b	h
2 Fold Thermostat	90	9	90
3 Fold Thermostat	90	9	111,5
4 Fold Thermostat	90	9	133




Assembly Detail



Important note!


The optimum distance between the two thermostats should be at least **120 mm** from center to center.

oria SWITCH TECHNICAL SPECIFICATIONS

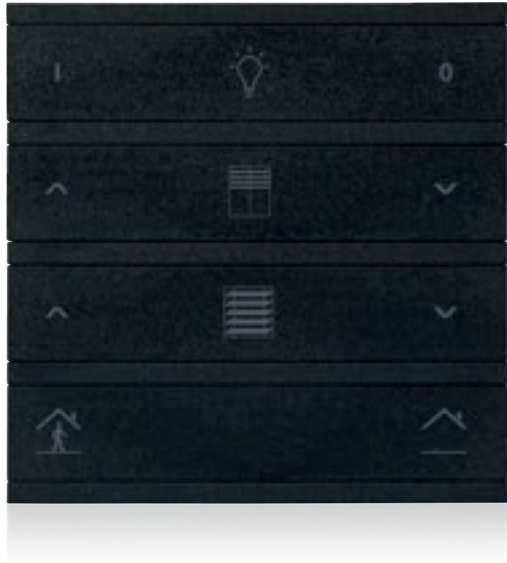


- Can be configured with ETS5.
- Serial switches with plastic push-button
- Large collection option up to 4 Folds
- Product options with and without notification LED
- Optionally, icon branding is available.
- Different color options
- Easy installation to 60x60 mm standard switch junctions
- Channels are identical, each with the following functions;
 - Switching,
 - Dimming,
 - Shutter/Blind control,
 - Value and priority assignment,
 - Scene control,
 - Status notification LED

Protection type	IP 20	EN 60529
Safety class	II	EN 61140
Supply	Voltage Range	21-30V DC, Supply from EIB/KNX line
	Supply voltage	15 mA
	Power consumption	15 mA x 30V
Button operation life	100.000	
Temperature	Operating	-5° C + 45° C
	Storage	-25° C + 55° C
	Transport	-25° C + 70° C
CE	In accordance with EMC guideline and low voltage regulation	

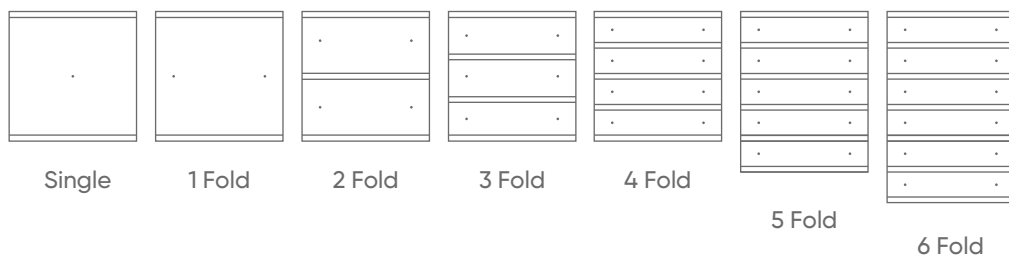


Dimensions (mm)	a	b	h
Single Switch	90	9	90
1 Fold Switch	90	9	90
2 Fold Switch	90	9	90
3 Fold Switch	90	9	90
4 Fold Switch	90	9	90
5 Fold Switch	90	9	111,5
6 Fold Switch	90	9	133

Assembly Detail












Important note!
The optimum distance between the two switches should be at least **120 mm** from center to center.





Product Family

The Mona Series consists of a user-friendly, elegant frameless glass design and intuitive operation, with capacitive buttons through minimalist icons. With its touch operated design and minimalist icons, it is suitable to be a part of your living space with its various color options.

-  Touch operated
-  Glass surface
-  Switch and Card Holder together
-  Frameless, minimalist design
-  RGB LED option
-  Icon options
-  Away, comfort, night and protection modes
-  Independent programmable buttons
-  Various color option

Switch



Thermostat




Switch & Thermostat





Variations

Switches

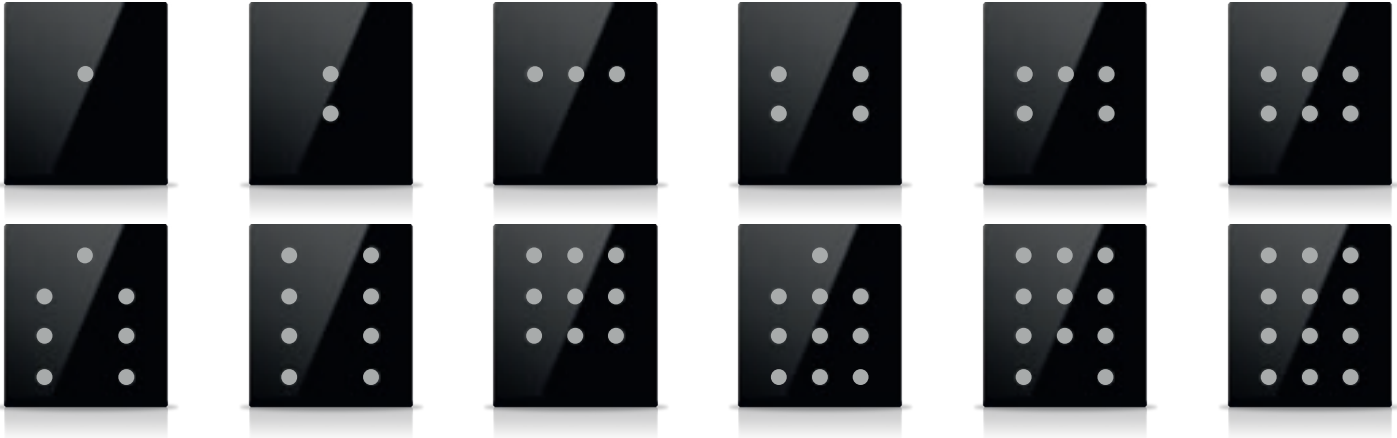

Thermostats



Sockets

The Mona serie offers glass surface, minimalist design, wide collection up to 5 gang, wide range of colors, wide range socket standart options like BS, European and Modular.





Technical Specifications



KNX Thermostat Side (up to 6 buttons)

- Temperature adjustment on display
- Integrated temperature sensor (°C/ °F)
- Fan speed adjustment (1, 2, 3, Auto)
- Different operation modes (Comfort, Night, Away, Protection)
- Fully automatic function mode (Heat - Cool transition)
- Control flexibility for all HVAC units including VRF-VRV and AC
- PI proportional, PI PWM, Hysteresis, Fan coil, Split unit controls




KNX Switch Side (up to 12 buttons)

Independent configuration for each button


- Switching
- Dimming
- Blind Control
- Value Transmitting
- Scene Control

Product Code Legend

MN - X - X X

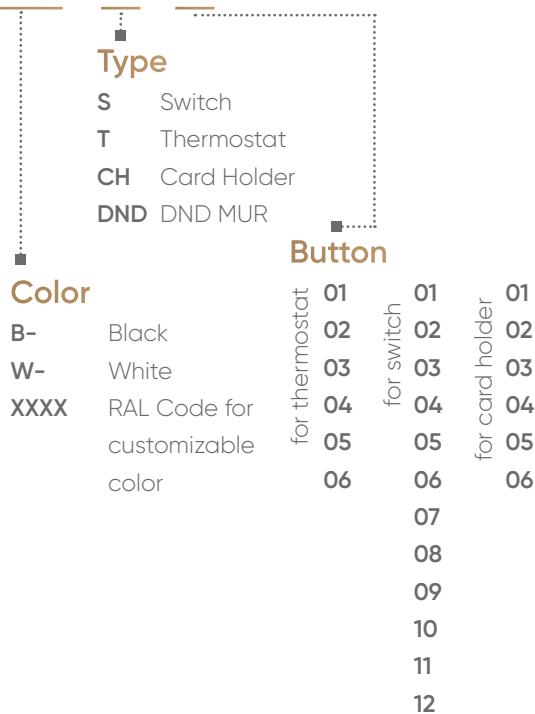

X X

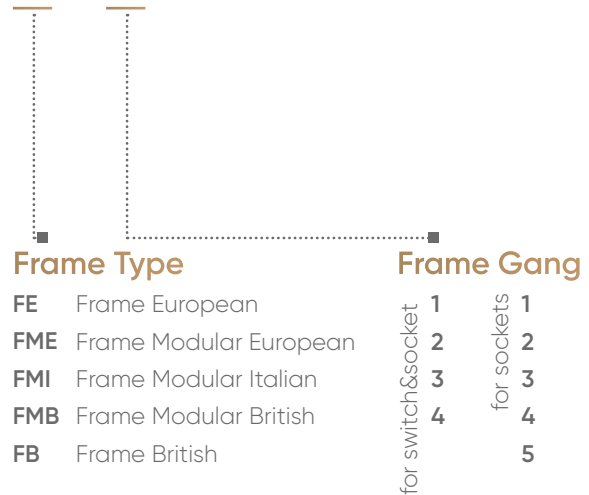

Panel Devices

RCU FAMILY
EAE KNX - ROOM CONTROL UNITS



PD100 / MD100 / HD100 / CD100
EAE KNX - SENSOR



KMG103
EAE KNX - KNX Modbus Gateway



FCA100
EAE KNX - FANCOIL ACTUATOR



UD106
EAE KNX - UNIVERSAL DIMMER



SD110
EAE KNX - 1-10V DIM ACTUATOR



DA100 / DA110
EAE KNX - DALI GATEWAY



SW108 / SW104
EAE KNX - RELAY MODULE



PSU320 / PSU640
EAE KNX - POWER SUPPLY
320mA/640mA



MIO1616
EAE KNX - MULTI INPUT OUTPUT



UI108
EAE KNX - UNIVERSAL
INTERFACE



ACGME100
MITSUBISHI AC GATEWAY



IPR200 / IPI200
EAE KNX - IP ROUTER -
IP INTERFACE



LC200
EAE KNX - LINE COUPLER



MIOLA DEMO CASE



ROSA DEMO CASE



ORIA DEMO CASE



ROSA DEMO BOX



Certificates

EAE Technology products are and will always be in compliance with international open standards such as KNX, DALI, TCP/IP and WiFi.



KNX is the worldwide standard for home and building control. KNX offers at the same time the reliability of a consolidated system, market leader for over twenty years. (470 KNX Members, 8000 Products, 470 KNX Training Centers, 83000 KNX Partners, 190 Countries)



DALI (Digital Addressable Lighting Interface) is a protocol for digital lighting control that enables the easy installation of robust, scalable and flexible lighting networks.



EU rules restricting the use of hazardous substances in electrical and electronic equipment to protect the environment and public health.



This standard is based on a number of quality management principles including a strong customer focus, the motivation and implication of top management, the process approach and continual improvement. These principles are explained in more detail in ISO's quality management principles.



The EAC certifications are issued by independent EAC certification bodies and their laboratories accredited by the relevant agencies of the five members of the EAC Economic Union: Russia, Belarus, Kazakhstan, Armenia and Kyrgyzstan.



SOME OF OUR REFERENCES



FOLKART VEGA
FOLKART VEGA
Izmir



FOLKART
ÇEŞME
FOLKART BOYALIK
Izmir



nef
BODRUM NEF GOLKOY
Bodrum



MESA BODRUM
MESA DEMIRBUKU
Bodrum



ÇUBUKLU 28
MESA CUBUKLU 28
Istanbul



Vadikoru
VADIKORU RESIDENCE
Istanbul



ROUTE
ISTANBUL
ROUTE ISTANBUL
Istanbul



CENTRAL BALAT
CENTRAL BALAT RESIDENCE
Bursa



BONNEVILLE
MIHRAPLI
BONNEVILLE MIHRAPLI
Bursa



BRODSKY
BRODSKY APARTMENT
Russia



GAYDA | Atasehir
Mutluluğun temeli, mükemmeli seçmektir.
GAYDA ATASEHIR
Izmir



BALANCE
GÜNEŞLİ
BALANCE GÜNEŞLİ
Istanbul



DIA.BELLA
— Mimaroba —
DIA BELLA
Istanbul



MOTTO
MOTTO TERAS BAHCE
Konya




Mandarin
MANDARIN VILLAS
Canakkale



iş GYO
İS CADDE GYO
Istanbul

SOME OF OUR REFERENCES

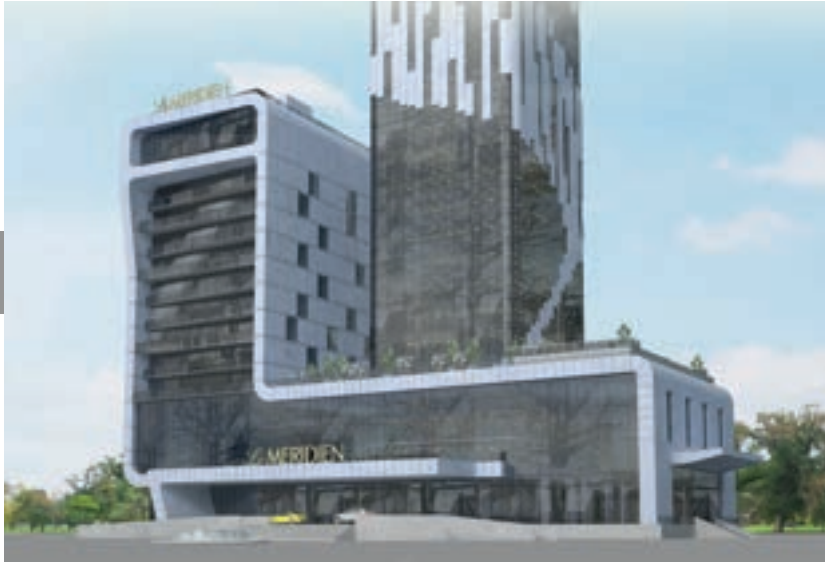

HOTELS · RESORTS · SUITES

Le MERIDIEN MARRIOTT HOTEL
Georgia



NG PHASELIS BAY HOTEL
Antalya



RIXOS PREMIUM BODRUM
Mugla



AUTOGRAPH COLLECTION
MARRIOTT
Istanbul



MILLENNIUM WEST HOTEL
Istanbul



CIELO HOTEL
Qatar



RADISSON HOTEL
Izmir



THE OBA HOTEL
Bodrum



MABIN HURA MALDIVES
Maldives



GURDAL HOTEL
Istanbul




GRAND HOTEL
Nijer



TFF RIVA HOTEL
Istanbul



NAU HOTEL
Portugal



GRAND GALATA HOTEL
Istanbul



KARAVANSARAY COMPLEX
Kazakhstan



CLOUD NINE
Russia

SOME OF OUR REFERENCES




ATATÜRK KÜLTÜR MERKEZİ
 BAŞKANLIĞI
ATATURK CULTUREL
 CENTER
 İstanbul




NATIONAL DEFENCE UNI.
 LIBRARY
 İstanbul




WAR VETERANS
 REHABILITATION CENTER
 Ankara




ETIMADEN
 for life
ETI MADEN ENTERPRISES
 Ankara




HAVELSAN
HAVELSAN CENTRAL
 BUILDING
 Ankara




PSİ DEVLET SU İŞLERİ
 GENEL MÜDÜRLÜĞÜ
DSI ADMINISTRATIVE
 BUILDING
 İzmir




KALYON
KALYON HOLDING
 GENERAL CENTER
 İstanbul




TURKCELL
TURKCELL DATA CENTER
 Ankara and Corlu




YDA center
YDA BUSINESS CENTER
 Ankara




BUN
BEYKOZ NUN SCHOOLS
 İstanbul




İSTANBUL MEDENİYET
 ÜNİVERSİTESİ
MEDENİYET UNIVERSITY
 LIBRARY
 İstanbul




MARMARA
MARMARA UNIVERSITY
 İstanbul




ÖZYEGİN
ÖZYEGİN UNIVERSITY
 İstanbul




Nesibe Aydın
 Eğitim Kurumları
NESİBE AYDIN
 EDUCATIONAL INSTITUTIONS
 Ankara




ALTINBAS
 ÜNİVERSİTESİ
ALTINBAS UNIVERSITY
 İstanbul




GONDAR
GONDAR UNIVERSITY
 Ethiopia

SOME OF OUR REFERENCES



PRESIDENCY SYMPHONY ORCHESTRA
Ankara



PRESIDENCY AHLAT COMPLEX
Bitlis



COMMUNICATION PRESIDENCY OF TURKEY
Ankara



HIGH ELECTION BOARD BUILDING
Ankara



ALANYA COURTHOUSE
Antalya



ANTALYA CENTRAL BANK
Antalya



ERDEMLI COURTHOUSE
Mersin



BURSA REGIONAL COURT OF JUSTICE
Bursa



ADIYAMAN GOVERNMENT HOUSE
Adiyaman



SIVAS GOVERNORSHIP
Sivas



MINISTRY OF YOUTH AND SPORT BUILDING
İstanbul



EMLAK PARTICIPATION BANK BUILDING
İstanbul



CANAKKALE MUNICIPAL BUILDING
Canakkale



DULKADIROGLU MUNICIPALITY BUILDING
Kahramanmaraş



GUNGOREN MUNICIPALITY BUILDING
İstanbul



BAGCILAR MUNICIPALITY BUILDING
İstanbul

SOME OF OUR REFERENCES



DR. LUTFI KIRDAR KARTAL TRAINING AND RESEARCH HOSPITAL
Istanbul



TEKIRDAG CITY HOSPITAL
Tekirdag



KOCAELI CITY HOSPITAL
Kocaeli



IZMIR CITY HOSPITAL
Izmir



ERZURUM CTY HOSPITAL
Erzurum



GIRESUN CITY HOSPITAL
Giresun



SIVAS NUMUNE HOSPITAL
Sivas



MAMAK HOSPITAL
Ankara



KONYA NUMUNE HOSPITAL
Konya



TARSUS PUBLIC HOSPITAL
Mersin



HATAY DORTYOL HOSPITAL
Hatay



SAKARYA WOMEN AND MATERNITY HOSPITAL
Sakarya



AGRI PUBLIC HOSPITAL
Agri



TAKSİM FIRST AID HOSPITAL
Istanbul



MEDICANA HOSPITAL
Izmir



ALGERIA HOSPITAL PARKING LOT COMPLEX
Algeria


SOME OF OUR REFERENCES



ISTANBUL FINANCIAL CENTER HALK BANK GYO
Istanbul



ISTANBUL FINANCIAL CENTER BDDK BUILDING
Istanbul



ISTANBUL FINANCIAL CENTER 1-13 RECREATION
Istanbul



IST. FINANCIAL CENTER SPECIAL PROJECT AREA
Istanbul



IST. FINANCIAL CENTER SIGORTA A.S.
Istanbul



7. MAIN JET BASE COMMAND
Malatya



ISTANBUL AIRPORT TURKISH AIRLINES BUILDINGS
Istanbul



THY SIMULATION BUILDING
Istanbul



ORD. PROF. DR. SULHI DONMEZ EDUCATION CENTER
Istanbul



PTT INTERNATIONAL CARGO PROCESSING CENTER
Istanbul



TECHNOPARK
Istanbul



SOCIAL SECURITY CORPORATE BUILDING
Kayseri



SOCIAL SECURITY CORPORATE BUILDING
Elazig



DICLE ELECTRIC A.Ş.
Diyarbakir



DISASTER and EMERGENCY MANAGEMENT CENTER
Erzincan



DISASTER and EMERGENCY MANAGEMENT CENTER
Kahramanmaraş

SOME OF OUR REFERENCES



SENEGAL STADIUM
Senegal




ERYAMAN STADIUM
Ankara




CEMAL KAMACI SPORT
COMPLEX
Istanbul



top interior®
TOP INTERIEUR FURNITURE
Belgium




PHILIP MORRIS
Kazakhstan




KALYON SOLAR
TECHNOLOGIES FACTORY
Ankara




ANDAC AUTOMOTIVE
Izmir




TEKFEN HOLDING
ARCHIVE BUILDING
Adana




NUR SULTAN MOSQUE
Kazakhstan




NAZARBAYEV CENTRE
Kazakhstan




TURK TRACTOR
Sakarya - Ankara




UNIPRES
England




KUTAHYA CERAMIC
Kutahya



B/S/H/
BSH
Cerbezkoy




BAKU TOWER 109
Azerbaijan




KORDSA FACTORY
Kocaeli

SOME OF OUR REFERENCES



RONESANS HILLTOWN AVM
Izmir



TEM POINT MALL
Istanbul



VEGA MALL
SUBAYEVLERİ
Ankara



NEV ÇARŞI USKUDAR
Istanbul



TEI MOTORS
Eskisehir



MILAHA LOGISTIC
Qatar



OYAK PORT
Kocaeli



GENERAL DIRECTORATE
OF HIGHWAYS BUILDING
Ankara



EKOL LOGISTIC
Kocaeli



ANKARA İS GYO TOWER
Ankara



REP KON FACTORY
Istanbul



ÇAYKUR RIZE FACTORY
Rize



MERCEDES BENZ FACTORY
Aksaray



TURK TELEKOM BUILDING
Istanbul



ZIRAAT BANK DATA
CENTER
Istanbul



SİŞECAM FACTORY
Eskişehir



The information in this catalogue is subject to change without notice. Datasheet and user manuals should be consulted for the most accurate and up-to-date information.

EAE Technology assumes no responsibility for any errors that may appear in this document.

2021 © EAE Technology
All rights reserved









TECHNOLOGY

EAE Teknoloji A.Ş.

Ikitelli Organize Sanayi Bölgesi
Eski Turgut Ozal Caddesi No:20
Başakşehir / İstanbul - TURKEY
Tel. : +90 212 413 21 00 (pbx)
Fax : +90 212 549 37 90
www.eaetechnology.com

NEXGEN
Smart Building Solutions

Nexgen Smart Building Solutions
nexgensmartbuildingsolutions.com
Unit D2 | Centenary Works
150 Little London Road
Sheffield | S8 0UJ | UK



EAE Technology, is provided with the right to perform changes deemed necessary without notifying in advance.
KNX Smart Home, Residential & Hotel Solutions English – Issue Date : 16.10..2019