



Welcome to the Hawk & Bear Tactical Product Catalog. Our products are designed with precision and strength, catering to hunters, tactical professionals, and law enforcement. Manufactured in Taiwan, our accessories are crafted with superior quality and are not impacted by geopolitical tariffs.

- Laser bullets
- Bore Sight Kits
- Laser light / sight combos
- Red Dot sights
- White Laser flashlights and spotlights
- High Powered Green Lasers





Bore sighter			9 8 9 9 9	900	
Product Model	.223 Rem	45ACP	9mm(Long)	7.62*54R	
Laser Wavelength		650nm			
Output Power	< 5mW				
Spot Size	< 20mm@10M				
Accuracy	±0.3°				
Material	Brass				
Battery type		LR41/A	G3*3pcs		
Range for sighting	0-100M				
Product Size	Ф9.5*45mm(H) Ф12*33.2mm(H) Ф9.8*30.9mm(H) Ф14.4*53.6mm				
Packing Size	60(L)*40(W)*16(H)mm				
Weight	17g	24g	16g	40g	
Surface Treatment	Passivation				

Bore sighter	000	000	999	000	
Product Model	.30/30 Win	.30-06 Spr	6.5mm	7.62*39mm	
Laser Wavelength		650	)nm		
Output Power		< 5mW			
Spot Size		< 20mm@10M			
Accuracy	±0.3°				
Material	Brass				
Battery type		LR41/A	G3*3pcs	=	
Range for sighting	0-100M				
Product Size	Ф12.85*56mm(H) Ф11.9*64.3mm(H) Ф11.9*48.4mm(H) Ф11.3*38.9mm(H)				
Packing Size	76(L)*40(W)*16(H)mm 60(L)*40(W)*16(H)mm			/)*16(H)mm	
Weight	33g 46g 34g 24g				
Surface Treatment	Passivation				

Bore sighter	000	000		tal tal tal tal tal	
Product Model	.243/.308 Win	40 S&W	9mm(short)	12 Guage	
Laser Wavelength		650	)nm		
Output Power		< 5mW			
Spot Size	1	< 20mm@10M			
Accuracy	±0.3°				
Material	Brass				
Battery type		LR41/AG3*3pcs LR44 *3pcs			
Range for sighting	0-100M				
Product Size	Ф11.9*45mm(H)	Ф22.4*60.2mm(H)			
Packing Size	60(L)*40(W)*16(H)mm 2(L)*71(W)*28(H)m				
Weight	32g 21g 16g 158g				
Surface Treatment	Passivation				







Picture	Applicable Caliber
_	.170~.177
-	.220~.250 (.223)
-	.264~.284
-	.300~.320
	.338~.358
	.375~.410 (.380)

Picture	Applicable Caliber
-	.416~.450
-	.458~.460
	.500~.540
-	.535~.61
-4	.57~.64
-	.69~.78 (12GA)

Laser wavelength: red 650nm Output power: < 5mw Spot size: 10 meters < 20mm

Power supply: LR44 button battery

Endurance: 2H

Material: Aluminum alloy Calibration distance: 0-100m

Product size: 162.6mmL\* 16.5mmW \* 16.5mmH

Packing size: 188mm L \* 81mmW \* 29mmH

Weight: 38 g






Laser Light Combo 500 Lumen White Light				
Product Model	1084		1073	
Laser Wavelength	Red 650nm Green 520nm		Red 650nm	Green 520nm
Output Power		<5mW	Class IIIa	
Spot Size		<20m	nm@10M	
Power Supply	USB Charging		TUP-C Charging	
Battery Life	2H			
Material	Aluminum Alloy			·
Product Size	L2.28"/58 * W1.1"/28 * H1.65"/42mm		L2.44"/62 * W1.1"/28 * H1.18"/30mm	
Package Size	L3.78"/96 * W2.91"/74 * H1.83"/46.5mm			
Weight	15	0g	132g	

Laser sight				R.W. D
Product Model	10	)79	1080	
Laser Wavelength	Red 650nm	Green 520nm	Red 650nm	Green 520nm
Output Power		<5mW,	, Class IIIa	
Spot Size		<20m	nm@10M	
Power Supply	Magnetic Charging, Li-ion Battery			
Battery Life	2H			
Material	Aluminum Alloy			
Product Size	L2.13"/54 * W1.1"	/28 * H0.87''/22mm	L2.13"/54 * W	1.1"/28 * H0.9"/23mm
Package Size	L3.78"/96 * W2.91"/74 * H1.83"/46.5mm			
Weight	12	25g		124g





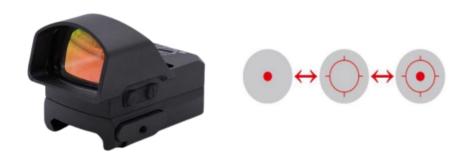

	RC-H-08A
倍率 (Magnification)	1X
視窗尺寸 (Window size)	24mm x 17mm
光點距離 (Spot distance)	Unlimited
視差 (Parallax)	100YDS / 1"
光源 (Light Source)	RCLED
波長 (Wavelength)	650
<u> </u>	1MOA
毎響移動量 (Movement per Click)	
光點尺寸 (Spot size)	35MOA / 2MOA
移動量(上下) (Movement (Up/Down))	110MOA
移動量(左右) (Movement (Left/Right))	110MOA
亮度切換檔位(Brightness switching gears )	2 ( NV ) + 8
震動喚醒 (Vibration Wake-up)	YES
電池安裝 (Battery Installation)	Knob installation ( top position )
反射鏡片 (Reflector Lens)	Ultra-high transmittance 96% medium reflection
表面處理 (Surface Treatment)	Hard Anodized, Dark Graphite Grey, matte
材質 (Material)	Aircraft Grade Aluminum / 6061T6
電池型號 (Battery Model)	CR1632 / 3V
電池使用時間 (Battery Life)	360 hours on highest setting.
	36,000 hours on lower settings.
防水測試 (Waterproof Test)	IP67
衝擊測試 (Impact Test)	Acceleration 3500g with 3.8HZ And 100 times
高低溫測試 (High/Low Temperature Test)	-30°C to +60°C(-86°F to +140°F)
長度 (Length)	46mm(1.81in)
寬度 (Width)	30.5mm(1.2in)
高度 (Height)	39.15mm(1.54in)
重量 (Weight)	72/42g(1.48/2.54oz)










	RC-H-08
倍率 (Magnification)	1X
視窗尺寸 (Window size)	24mm x 17mm
光點距離 (Spot distance)	Unlimited
視差 (Parallax)	100YDS / 1"
光源 (Light Source)	RCLED
波長 (Wavelength)	650
每響移動量 (Movement per Click)	1MOA
光點尺寸 (Spot size)	2MOA
移動量(上下) (Movement (Up/Down))	110MOA
移動量(左右) (Movement (Left/Right))	110MOA
亮度切換檔位(Brightness switching gears )	2 ( NV ) + 8
震動喚醒 (Vibration Wake-up)	YES
電池安裝 (Battery Installation)	Knob installation ( top position )
反射鏡片 (Reflector Lens)	Ultra-high transmittance 96% medium reflection
表面處理 (Surface Treatment)	Hard Anodized, Dark Graphite Grey, matte
材質 (Material)	Aircraft Grade Aluminum / 6061T6
電池型號 (Battery Model)	CR1632 / 3V
電池使用時間 (Battery Life)	360 hours on highest setting.
	36,000 hours on lower settings.
防水測試 (Waterproof Test)	IP67
衝擊測試(Impact Test)	Acceleration 3500g with 3.8HZ And 100 times
高低溫測試 (High/Low Temperature Test)	-30°C to +60°C(-86°F to +140°F)
長度 (Length)	46mm(1.81in)
寬度 (Width)	30.5mm(1.2in)
高度 (Height)	39.15mm(1.54in)
重量 (Weight)	72/42g(1.48/2.54oz)










	RC-C-RF-D01
倍率 (Magnification)	1X
視窗尺寸 (Window size)	22mm
光點距離 (Spot distance)	Unlimited
視差 (Parallax)	100YDS / 1"
光源 (Light Source)	RCLED
波長 (Wavelength)	650
每響移動量 (Movement per Click)	1/2 MOA
光點尺寸 (Spot size)	2MOA Red Dot
移動量(上下) (Movement (Up/Down))	) 140MOA
移動量(左右) (Movement (Left/Right))	⟩ 140MOA
亮度切換檔位(Brightness switching gears)	2 ( NV ) +10
震動喚醒 (Vibration Wake-up)	YES
電池安裝 (Battery Installation)	Knob installation
反射鏡片 (Reflector Lens)	Ultra-high transmittance 96% medium reflection
表面處理 (Surface Treatment)	Hard Anodized, Dark Graphite Grey, matte
材質 (Material)	Aircraft Grade Aluminum / 6061T6
電池型號 (Battery Model)	CR2032 / 3V
電池使用時間 (Battery Life)	400 hours on highest setting.
	50,000 hours on lower settings.
防水測試 (Waterproof Test)	IP67
衝擊測試 (Impact Test)	Acceleration 1200g with 3.8HZ And 100 times
高低溫測試 (High/Low Temperature Test)	-30°C to +60°C(-86°F to +140°F)
長度 (Length)	63.6mm(2.5in)
寬度 (Width)	42.8mm(1.7in)
高度 (Height)	65mm(2.56in)
重量 (Weight)	168.8g(5.95oz)









	RC-C-RF-Y04
倍率 (Magnification)	1X
視窗尺寸(Window size)	22mm
光點距離 (Spot distance)	Unlimited
視差 (Parallax)	100 YDS/1.5'
光源 (Light Source)	RCLED
波長 (Wavelength)	650
每響移動量 (Movement per Click)	1MOA
光點尺寸 (Spot size)	60MOA / 2MOA Red Dot
移動量(上下) (Movement (Up/Down))	100MOA
移動量(左右) (Movement (Left/Right))	100MOA
亮度切換檔位(Brightness switching gears)	2 ( NV ) +10
震動喚醒 (Vibration Wake-up)	YES
電池安裝 (Battery Installation)	Knob installation
反射鏡片 (Reflector Lens)	Ultra-high transmittance 96% medium reflection
表面處理 (Surface Treatment)	Hard Anodized, Dark Graphite Grey, matte
材質 (Material)	Aircraft Grade Aluminum / 7075T6
電池型號 (Battery Model)	CR2032 / 3V
電池使用時間 (Battery Life)	400 hours on highest setting.
	40,000 hours on lower settings.
防水測試 (Waterproof Test)	IP68 20Metre/30min
衝擊測試 (Impact Test)	Acceleration 1000g With 3.8HZ And 100 times
高低溫測試 (High/Low Temperature Test)	-30°C to +60°C(-86°F to +140°F)
長度 (Length)	63.6mm(2.5in)
寬度 (Width)	42.8mm(1.7in)
	65mm(2.56in)
高度 (Height)	0311111(2.3011)



#### White light laser module

Item	Product Specifications			unit
	1KM	2KM	3KM	unit
LD driving current	12	12	12	Amperes (A)
LD driving voltage	2	2.5	3	Volts (V)
Emission half-angle	0.25	0.25	0.25	Degree
Beam spot size	8.7	17.5	26.2	meters (m)
color temperature	6000	6000	6000	Kelvin (K)
weight	60	120	220	grams (g)

White light laser application - 1500M ultra-long-range tactical flashlight.

Mountaineering, search and rescue, exploration.










# White Laser FLs

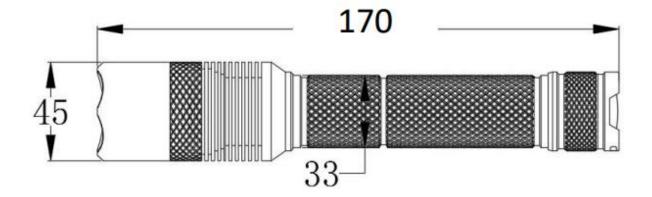

Spot size at 10 meters: Approximately 30cm in diameter

Projection distance: >1000M

Battery: 5000mAH (1 x 21750 lithium battery)

Waterproof rating: IP66

Working time: Approximately 6 hours at maximum brightness

Product features: Three-stage brightness adjustment,

Continuous flash mode,

SOS mode

◆ Size: 45mm x L: 170mm

Power consumption: 12W

◆ Weight: 0.6KG


Light source: 450nm Laser

◆ Color temperature: 5000K ~ 6500K







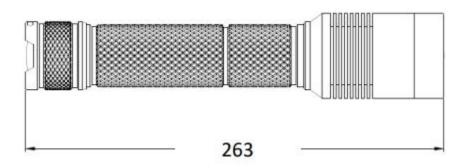

◆ Size: 65mm x L: 263mm◆ Power consumption: 12W

◆ Weight: 0.6KG

◆ Light source: 450nm laser

◆ Color temperature: 8000K ~ 10000K

Spot size at 10 meters: Approximately 20cm in diameter

Projection distance: >1000M

Battery: 10400mAH (2 x 26650 lithium batteries)

Waterproof rating: IP66

**Working time**: Approximately 6 hours at maximum brightness **Product features**: Three-stage brightness adjustment,

Continuous flash mode,

SOS mode







Size: 7cm x 7cm x 8.5cm

◆ Power consumption: 16W

Light source: 450nm laser

◆ Color temperature: 5000K ~ 6500K

Optical angle: 1.5 degrees (customizable angle available)

Projection distance: >2500M

Waterproof rating: IP68

Working time: Approximately 6 hours at maximum brightness

Product features: Three-stage brightness adjustment

Continuous flash mode

SOS mode







Warning, bird deterrence, and dazzling applications.



- Outdoor rescue, long-distance high-intensity light signaling.
- Coast Guard, public disturbance alert.
- ➤ Guiding helicopter search and rescue operations, directing military aircraft for bombing, and enforcing fishery regulations, among other activities.
- Long-distance illumination.
- Villa security, secure area early warning.
- > Bird deterrence at airports, farmland, and reservoirs; hunting in the wild.

Item	Product Specifications
Wavelength	520±5nm
Optical output power	>1W
Beam effect	Single line, beam, starry sky multi-point pattern.
Laser classification	Class 4
Operating voltage	12V
Rated power	11W
Modulation mode	TTL
TTL trigger mode	>DC 2.0V
Operating frequency.	0.2K ~ 10KHz
Operating environment temperature	-30°C ~ 40°C
Light source life	8000 hours.
Weight	200g





### 20W High Output power Green Laser System Warning and dazzling applications




- Outdoor rescue, long-distance high-intensity light signaling.
- Coast Guard, public disturbance alert.
- Fishery law enforcement.
- Long-distance illumination.


Item	Product Specifications
Wavelength	525±10nm
Optical output power	~20W
Laser beam size @10M	30cm
Laser beam size @1KM	30M
Laser classification	Class 4
Operating voltage.	AC110~240V
Maximum power consumption	200W
Control method	Button
Light source mode	Constant / Flashing.
Waterproof rating	IP65
Operating environment temperature	-30°C ~ 40°C
Light source life	8000 hours.
Weight	10Kg








#### Appearance dimensions:











### In Development







Hawk & Bear Tactical LLC | Precision & Strength Website: hawkandbeartactical.com | Email: ac@hawkandbeartactical.com Phone: 518-598-6033 © 2025 Hawk & Bear Tactical LLC. All Rights Reserved. Unauthorized reproduction is prohibited.

## In Development









Thank you for choosing **Hawk & Bear Tactical**—where **precision meets strength**. We take pride in delivering high-quality tactical accessories designed for hunters, law enforcement, and military professionals.

Feel free to contact us, we are looking forward to working with you!

#### **Contact Information**

For inquiries, reach out to us:

Website: www.hawkandbeartactical.com

• Email: ac@hawkandbeartactical.com

• **Phone**: 518-598-6033

