



\*model pictured:  
IUS-FMC-2CH-01C

# BurTerminator™

## The Clog Eliminator

### Float Management Control

**...helps prevent Sewage  
Pump Grinders from  
getting clogged!**

The BurTerminator™ Float Management Control from Innovative Utility Solutions, LLC was designed to save wastewater utility companies headaches, time, and money!

The recent surge in the use of “flushable” wipes has put a tremendous strain on wastewater utility companies, as they (along with countless other strange objects) have a tendency of remaining lodged in the mouth of a grinder when the water level inside a tank drops. When the water level and float drop, power is cut off to the grinder even though it is not done chewing up the debris. When the water level does come back up and the grinder tries to kick back on, it cannot generate the amount of torque required to turn the clogged impeller or blades. The grinder must then be lifted and cleaned out by field personnel before it can function.

The BurTerminator™ Float Management Control (FMC) mounts inside the electrical panel powering a pump grinder and keeps the grinder from shutting down while it is in the middle of chewing up debris. The grinder will continue to function until the debris is gone. This means that the grinder remains clean and operational so it is ready when needed.

Installation of the BurTerminator™ FMC must be performed by a qualified, licensed electrician, and will take as little as 15 minutes in most cases.



**INNOVATIVE  
UTILITY  
SOLUTIONS, LLC**

9763 CR 2285, Tyler, TX 75707

Office: (903) 504-5767

Cell: (903) 571-1442

<https://innovativeutility.com>

# Float Management Control

The BurTerminator™ Float Management Control (FMC) is available in single or two-channel setups to work with single or multiple-pump systems. This means that there is an option for every residential or commercial/industrial application. The 2CH-01 and 1CH-01 models will work with 120-, 240-, or 480VAC (single- or 3-phase) systems. The 2CH-01 will work with any pump grinder up to a 20 HP unit, depending on the model and amperage. However, *larger custom units can be built to meet heavier demands.*


The addition of the BurTerminator™ FMC to the electrical panel does not interfere with a grinder's thermal overload or current overload circuit, so the pump grinder is still able to shut down if it is not able to grind the debris without causing damage to the grinder.

## TECHNICAL DATA

- Dimensions: 3.5" x 4.5" x 2.2"
- Channels: 2 (for 2 pump grinders)
- Dimensions: 4.5" x 2.25" x 2.20 Channels: 1 (for 1 pump grinder)
- AC Current Measurement Range: 0.5A - 50A max  
(Larger model FMC will work with any 15 HP unit.)
- Works with 120-, 240-, or 480VAC (single-or 3-phase) systems.
- *Larger custom units can be built to meet heavier demands.*

IUS-FMC-2CH-01

IUS-FMC-1CH-01

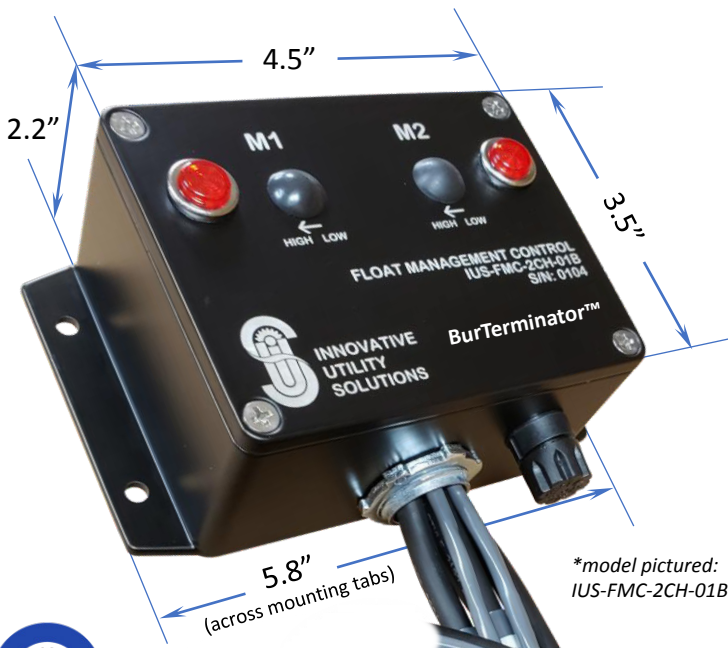

\*model pictured:  
IUS-FMC-2CH-01B



MADE IN  
  
U.S.A.



INNOVATIVE  
UTILITY  
SOLUTIONS, LLC

9763 CR 2285, Tyler, TX 75707  
Office: (903) 504-5767  
Cell: (903) 571-1442  
<https://innovativeutility.com>