

# Marine Commercial CURSOR 16

Rating type D: 368 kW (500 HP) @ 1800 rpm

## SPECIFICATIONS

Thermodynamic cycle	Diesel 4 stroke	
Air handling	TCA	
Cylinders arrangement	6L	
Bore x Stroke	millimeters	141 x 170
Total displacement	liters	15.9
Valves per cylinder	number	4
Cooling System	liquid	
Direction of Rotation (viewed facing flywheel)	CCW	
Engine management	by ECU (Electronic Control Unit)	
Injection System	CR	


## STANDARD CONFIGURATION

Flywheel housing	type	SAE 1
Flywheel size	inch	-
Air filter	14"	
Turbocharger	Water cooled Fixed Geometry Turbo Aftercooler (TCA)	
Heat exchanger	tube type	
Exhaust gas water mixer - Exhaust cooled elbow	-	
Water charge tank	included	
Fuel filter	number	1 Rear Side
Fuel prefilter	included (loose)	
Fuel pump	included	
Oil filter	number	2 Left Side
Oil sump	aluminium	
Oil vapours blow-by circuit	rear	
Oil heat exchanger	included	
Oil filler	by cylinder head cover	
Starter	24 V - 5.5 kW	
Alternator	28 V - 90 A	
Engine stop device	by ECU (Electronic Control Unit)	
Wiring harness	with negative to ground connection	
Painting color	white "ICE"	

## WEIGHT AND DIMENSIONS

Dimensions	LxWxH (mm)	1465 x 1000 x 1160
Dry Weight	Kg	1570

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

## ELECTRICAL SYSTEM

Voltage	V	24 V
---------	---	------

## NOT INCLUDED IN STANDARD CONFIGURATION

Battery - minimum capacity recommended	Ah	220
Battery - minimum cold cranking capacity recommended	Ah	900

## LEGEND

Arrangement	Air Handling	Turbocharger	Injection System	Exhaust System
L (in line)	TCA (Turbocharged with aftercooler)	WG (Wastegate)	M (Mechanical)	EGR (Exhaust Gas Recirculation)
V (90° "V" configuration)	TC (Turbocharged)	VG (Variable Geometry Turbocharger)	CR (Common Rail)	SCR (Selective Catalytic Reduction)
	NA (Naturally Aspirated)	TST (Twin Stage Turbocharger)	EUI (Electronic Unit Injector)	
			MPI (Multi Point Injection)	

**A1** High Performance Crafts. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 300 hours per year.

**A2** Pleasure Commercial Vessels. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1000 hours per year.


**B** Light Duty: Full throttle operation restricted within 10% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1500 hours per year.

**C** Medium Duty: Full throttle operation < 25% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 3000 hours per year.

**D** Heavy Duty

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE




## RATING TYPE

		B	C	D
Maximum power [*]	kW (HP)	- (-)	- (-)	368 (500)
At speed	rpm	-	-	1800
Maximum no load governed speed at max rating	rpm	-	-	1970
Minimum idling speed	rpm	-	-	600
Mean piston speed at rated speed	m/s	-	-	10.2
BMEP at max power	bar	-	-	15.4
Specific fuel consumption at full load (best value)	g/kWh @ rpm	-	-	209
Oil consumption at max rating	(% of fuel cons.)	-	< 0.2	
Minimum starting temperature without auxiliaries	°C	-	-°	
Oil and oil filter maintenance interval for replacement	hours	-	-	

Net Power at flywheel according to ISO 3046/1, after 50 hours running, Fuel Diesel EN 590.  
Power tolerance 5%. Fuel consumption tolerance ±2%

## POWER & TORQUE

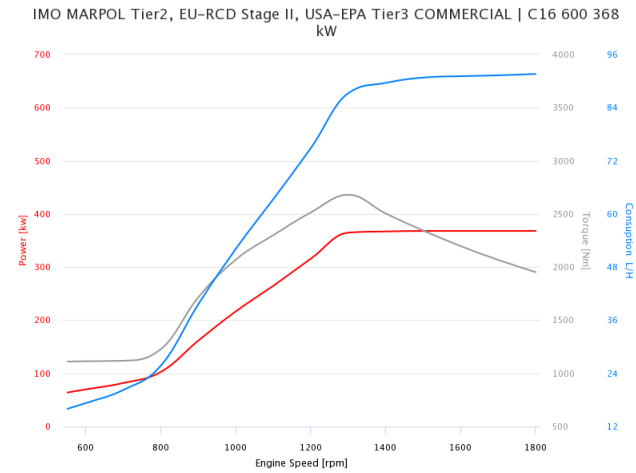

MARINE

### LEGEND

Arrangement	Air Handling	Turbocharger	Injection System	Exhaust System
L (in line)	TCA (Turbocharged with aftercooler)	WG (Wastegate)	M (Mechanical)	EGR (Exhaust Gas Recirculation)
V (90° "V" configuration)	TC (Turbocharged)	VG (Variable Geometry Turbocharger)	CR (Common Rail)	SCR (Selective Catalytic Reduction)
	NA (Naturally Aspirated)	TST (Twin Stage Turbocharger)	EUI (Electronic Unit Injector)	
			MPI (Multi Point Injection)	

- A1** High Performance Crafts. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 300 hours per year.  
**A2** Pleasure Commercial Vessels. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1000 hours per year.  
**B** Light Duty: Full throttle operation restricted within 10% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1500 hours per year.  
**C** Medium Duty: Full throttle operation < 25% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 3000 hours per year.  
**D** Heavy Duty

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

