



Detailed Description - Ballast

Performance		
Lamp	Number	1
	Watts	315W
InputVolts	120V	240V
Input Current	2.89A	1.43A
Input Power	343W	343W
Min Power Factor	0.95	
THD	<15%	
Crest Factor	<1.7	

Physical		
Case Length	193mm	22.79"
Case Width	130mm	9.29"
Height	67mm	10.67"
Weight	1.76kg	13.22lb

Protections

- 1.End of Lamp Life(EOL)Protection
- 2.Short circuit protection
- 3.Open circuit protection
- 4.Ignition failure protection
- 5.Thermal protection


Installation & Application Notes

- 1.Max. allowable case temperature:75°C/167°F.
- 2.Ambient Temperature:-20...+40°C/-4...+104°F.
- 3.Remote Mounting:15m/50ft.
- 4.Ignition voltage is 5kV.
- 5.Power must be cycled off-then on,after replacing the lamp.


Performance Requirements:

Rated main voltage:	120-240V
Voltage range (+/-10%):	108-264V
Main frequency:	50/60Hz
Operation frequency :	140-220Hz

Main Dimension

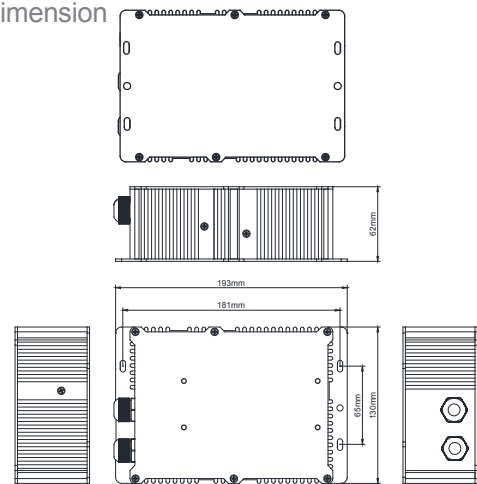

Wiring Diagram

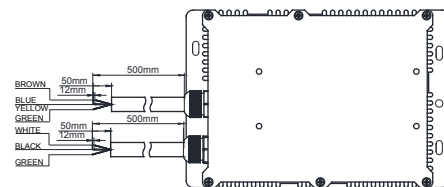

Ballast Case must be Grounded

Tcase max=75°C/167°F

