

Danish Quality Trailers

DESIGNED AND MADE IN DENMARK AND NOW ALSO PROUDLY MANUFACTURED IN NORTH AMERICA



Boogie trailers • 1-way tip trailers • Auto trailers • 3-way tip trailers • Machine trailer



VARIANT - Quality on the hook

Quality trailers since 1975

More than 40 years of development and production features Variant quality trailers.



Variant A/S has since the beginning in 1975, delivered Danish-produced quality trailers for professional and private.

The production of Variant takes place at the factory in Vejle, where innovation and know-how ensure that the products are always at the forefront of development.

Variant produces a wide range of trailers, that surely covers every need.

More than 500.000 trailers sold are our guarantee for quality, safety and comfort.



The MAXI-LOAD series is our extra strong trailer series, developed for heavy use - every day.



The trailers are developed in close cooperation with the users. High strength combined with a smart and beautiful design, is the result.

All MAXI-LOAD series trailers have leaf springs. It gives low loading height and good driving characteristics. The basic structure is built on a fully welded and hot-galvanized chassis.

Longitudinal and transverse beams are also hot-dip galvanized.

It provides exceptional strength and durability. The MAXI-LOAD series are super strong trailers in a timeless design.

Only the best is good enough...!



Pro-Line series

Pro-Line is our strongest range of boogie trailers for the professional user

Thoughtful details, uniform build and high strength make the trailer series the faithful companion of the craftsman.

All trailers feature powerful built-in closures and detachable hot-dip galvanized corner posts.

Models with bed length 520 cm and 620 cm have 2-part long sides and detachable side posts.

The inner folded lashing eyes provides an opportunity for fastening goods. All sides are open and removable without the use of tools.

The maintenance-free aluminum sides are smooth inside and bent in profile outside. It provides ease and high strength.

The trailer series is offered from length 260 cm to 620 cm and width 150 cm to 250 cm.

Gross weight is offered from 800 kg to 3,500 kg. All trailers come with powerful tilting jockey wheel.

A number of extra accessories are offered for the series, which will be presented on the following pages.

The series is divided by width.

Good quality for everyday use - width 150 cm

The strong Pro-Line series starts at a load size of 260x150 cm.

1 or 2 axles. Handy and with the same strength, equipment and finish as the larger trailers in the series.

The series offers a number of extra accessories.

Both models come with powerful tilt jockey wheel.



[Model shown 13P215]

VARIANT

Extra strong series of commercial trailers

For the professional user



See universal equipment on pages 38-39.

Parts shown below are extra accessories.



Index Pro-Line:

- Width 150 cm Page 5
- Width 180 cm Page 6-7
- Width 210 cm Page 8-9
- Width 250 cm Page 10-11



13P215

Inside box size: 254 x 144 x 35 cm
 Exterior box size: 260 x 150 x 35 cm
 Overall dimensions: 388 x 151 x 97 cm
 Gross weight: 1.350 kg
 Payload: 1.032 kg
 Wheel size: 13" Compact
 Axels: 1 axel, with brakes
 Side material: Aluminium
 Loading height: 63 cm

Also available with gross weight from 1.350 kg to 800 kg



20P215

Inside box size: 254 x 144 x 35 cm
 Exterior box size: 260 x 150 x 35 cm
 Overall dimensions: 388 x 151 x 120 cm
 Gross weight: 2.000 kg
 Payload: 1.640 kg
 Wheel size: 13"
 Axels: 2 axels, with brakes
 Side material: Aluminium
 Loading height: 68 cm

Also available with gross weight from 2.000 kg to 1.300 kg

TARPAULIN



Keeps trailer and goods dry. Strong quality. Can be supported with tarpaulin rod.

HIGH TARPAULIN



Strong quality with opening in the sides and back. Inside height 145 cm when mounted.

EXTRA DROPSIDES



Increases trailer space content. Removable. Height 35 cm.

NET GRID



Strong quality with front and rear opening. Height 60 cm.

FRONT STAND



Hot galvanized, for lashing of goods. Mounted in the corner posts. Height 70 cm.

ALUMINUM FLOOR



Increases the life of your trailer and provides non-slip ascending and descending.

Pro-Line series

Extra strong range of trailers for the professional user, 180 cm wide



[Model shown 2018 P3]

Solidly built trailer series - width 180 cm

Pro-Line trailers 180 cm wide, are the best-selling trailers for craftsmen and contractors. Charge lengths from 260 cm to 420 cm, and gross weights from 1.300 kg to 3.000 kg, make the series extremely popular.

Models in 320 cm and 420 cm length can be delivered with lockable ramp drawers under the load at extra cost. Practical and anti-theft protected.

The trailers are offered factory-fitted with other wheel sizes. All models come with powerful tilt jockey wheel.

The series offers a number of extra accessories, including extra dropsides, front stand and high tarpaulin.



Detachable sides and corner posts allow for flat bed.



Lashing eyes inside, folded into frame. Practical and strong.

VARIANT

The artisan's trailer

High strength and nice design



Dropsides:
Increase the volume of trailers.
Foldable and removable.
Height 35 cm.



Front stand
Hot galvanized, for lashing of goods.
Mounted in the corner posts. Height 70 cm.

See universal equipment
on pages 38-39.
Parts shown below are extra
accessories.



[Model shown 2018 P3]



2018 P2

Inside box size: 255 x 175 x 35 cm
Exterior box size: 260 x 180 x 35 cm
Overall dimensions: 399 x 180 x 103 cm
Gross weight: 2.000 kg
Payload: 1.590 kg
Wheel size: 13"
Axels: 2 axels, with brakes
Side material: Aluminium
Loading height: 69 cm

Also available with gross weight from 2.000 kg to 1.300 kg



2018 P3

Inside box size: 315 x 175 x 35 cm
Exterior box size: 320 x 180 x 35 cm
Overall dimensions: 445 x 180 x 103 cm
Gross weight: 2.000 kg
Payload: 1.550 kg
Wheel size: 13"
Axels: 2 axels, with brakes
Side material: Aluminium
Loading height: 69 cm

Also available with gross weight from 2.000 kg to 1.300 kg



2018 P4

Inside box size: 415 x 175 x 35 cm
Exterior box size: 420 x 180 x 35 cm
Overall dimensions: 544 x 180 x 103 cm
Gross weight: 2.000 kg
Payload: 1.500 kg
Wheel size: 13"
Axels: 2 axels, with brakes
Side material: Aluminium
Loading height: 69 cm

Also available with gross weight from 2.000 kg to 1.300 kg



3018 P3

Inside box size: 315 x 175 x 35 cm
Exterior box size: 320 x 180 x 35 cm
Overall dimensions: 459 x 180 x 93 cm
Gross weight: 3.000 kg
Payload: 2.490 kg
Wheel size: 10" Compact
Axels: 2 axels, with brakes
Side material: Aluminium
Loading height: 57 cm

Also available with gross weight from 3.000 kg to 1.800 kg



3018 P4

Inside box size: 415 x 175 x 35 cm
Exterior box size: 420 x 180 x 35 cm
Overall dimensions: 561 x 180 x 93 cm
Gross weight: 3.000 kg
Payload: 2.440 kg
Wheel size: 10" Compact
Axels: 2 axels, with brakes
Side material: Aluminium
Loading height: 57 cm

Also available with gross weight from 3.000 kg to 1.800 kg

HIGH TARPAULIN



2 models with side and rear opening. Internal height 145 cm and 210 cm when mounted (for 2018 P2 only 145 cm offered).

Pro-Line series

Built-in lashing eyes, 35 cm aluminum dropsides and removable corner posts, 210 cm width



[Model shown 3021 P4]

Large loading dimensions - width 210 cm

Pro-Line trailers 210 cm wide are for transportation of goods and machines that requires a little more space. Loading lengths from 320 cm to 620 cm, and gross weights from 1.800 to 3.500 kg, provide ample opportunity for transport.

In load lengths 520 cm and 620 cm the models are also offered with 3 axles. It provides extra strength and stability. All 210 cm wide models come with lockable ramp drawers under the bed. Practical and anti-theft protected.

The series offers a number of extra accessories, eg. ramps, extra dropsides, net grid and high tarpaulin. The trailers are offered factory-fitted with other wheel sizes. The trailers come with powerful tilt jockey wheel.



STANDARD ACCESSORIES
Detachable sides, center posts and corner posts allow for flat bed.



STANDARD ACCESSORIES
Lashing eyes inside, folded into frame. Practical and strong.



STANDARD ACCESSORIES
Lockable ramp drawers in length 250 cm. Ramps can be purchased.

VARIANT

Low loading height

Compact wheels on all models



Front stand
Hot galvanized, for lashing of goods. Mounted in the corner posts. Height 70 cm.



Dropsides:
Increases the volume of trailers. Foldable and removable. Height 35 cm.

See universal equipment on pages 38-39. Parts shown below are extra accessories.



[Model shown 3021 P4]



[Model shown 3321 P6]



3021 P3

Inside box size: 315 x 205 x 35 cm
Exterior box size: 320 x 210 x 35 cm
Overall dimensions: 454 x 210 x 93 cm
Gross weight: 3.000 kg
Payload: 2.475 kg
Wheel size: 10" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 57 cm

Also available with gross weight from 3.000 kg to 1.800 kg



3021 P4

Inside box size: 415 x 205 x 35 cm
Exterior box size: 420 x 210 x 35 cm
Overall dimensions: 555 x 210 x 93 cm
Gross weight: 3.000 kg
Payload: 2.380 kg
Wheel size: 10" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 57 cm

Also available with gross weight from 3.000 kg to 1.800 kg



3021 P5

Inside box size: 515 x 205 x 35 cm
Exterior box size: 520 x 210 x 35 cm
Overall dimensions: 657 x 210 x 93 cm
Gross weight: 3.000 kg
Payload: 2.325 kg
Wheel size: 10" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 57 cm

Also available with gross weight from 3.000 kg to 1.800 kg



3521 P3

Inside box size: 315 x 205 x 35 cm
Exterior box size: 520 x 210 x 35 cm
Overall dimensions: 455 x 210 x 100 cm
Gross weight: 3.500 kg
Payload: 2.915 kg
Wheel size: 13" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 60 cm

Also available with gross weight from 3.500 kg to 2.700 kg



3521 P4

Inside box size: 415 x 205 x 35 cm
Exterior box size: 420 x 210 x 35 cm
Overall dimensions: 569 x 210 x 100 cm
Gross weight: 3.500 kg
Payload: 2.820 kg
Wheel size: 13" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 60 cm

Also available with gross weight from 3.500 kg to 2.700 kg



3521 P5

Inside box size: 515 x 205 x 35 cm
Exterior box size: 520 x 210 x 35 cm
Overall dimensions: 659 x 210 x 100 cm
Gross weight: 3.500 kg
Payload: 2.765 kg
Wheel size: 13" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 60 cm

Also available with gross weight from 3.500 kg to 2.700 kg



3521 P6

Inside box size: 615 x 205 x 35 cm
Exterior box size: 620 x 210 x 35 cm
Overall dimensions: 754 x 210 x 100 cm
Gross weight: 3.500 kg
Payload: 2.680 kg
Wheel size: 13" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 60 cm

Also available with gross weight from 3.500 kg to 2.700 kg



3321 P5

Inside box size: 515 x 205 x 35 cm
Exterior box size: 520 x 210 x 35 cm
Overall dimensions: 655 x 210 x 92 cm
Gross weight: 3.500 kg
Payload: 2.620 kg
Wheel size: 10" Compact
Axels: 3 axles, with brakes
Side material: Aluminium
Loading height: 57 cm

Also available with gross weight from 3.500 kg to 2.700 kg



3321 P6

Inside box size: 615 x 205 x 35 cm
Exterior box size: 620 x 210 x 35 cm
Overall dimensions: 755 x 210 x 92 cm
Gross weight: 3.500 kg
Payload: 2.535 kg
Wheel size: 10" Compact
Axels: 3 axles, with brakes
Side material: Aluminium
Loading height: 57 cm

Also available with gross weight from 3.500 kg to 2.700 kg

Pro-Line series

Built-in lashing eyes, 35 cm aluminum dropsides and removable corner posts, 250 cm width



[Model shown 3525 P4]

The trailers are supplied with a powerful automatic jockey wheel.

VARIANT

Implemented strong

High gross weight - high payload



[Model shown 3525 P4]



3525 P4

Inside box size: 415 x 245 x 35 cm
 Exterior box size: 420 x 250 x 35 cm
 Overall dimensions: 560 x 250 x 95 cm
 Gross weight: 3.500 kg
 Payload: 2.775 kg
 Wheel size: 13" Compact
 Axels: 2 axles, with brakes
 Side material: Aluminium
 Loading height: 60 cm

Also available with gross weight from 3.500 kg to 3.700 kg



3525 P5

Inside box size: 515 x 245 x 35 cm
 Exterior box size: 520 x 250 x 35 cm
 Overall dimensions: 661 x 250 x 95 cm
 Gross weight: 3.500 kg
 Payload: 2.680 kg
 Wheel size: 13" Compact
 Axels: 2 axles, with brakes
 Side material: Aluminium
 Loading height: 60 cm

Also available with gross weight from 3.500 kg to 3.700 kg



3525 P6

Inside box size: 615 x 245 x 35 cm
 Exterior box size: 620 x 250 x 35 cm
 Overall dimensions: 759 x 250 x 95 cm
 Gross weight: 3.500 kg
 Payload: 2.625 kg
 Wheel size: 13" Compact
 Axels: 2 axles, with brakes
 Side material: Aluminium
 Loading height: 60 cm

Also available with gross weight from 3.500 kg to 3.700 kg



WITH 3 AXLES

3325 P5

Inside box size: 515 x 245 x 35 cm
 Exterior box size: 520 x 250 x 35 cm
 Overall dimensions: 655 x 250 x 93 cm
 Gross weight: 3.500 kg
 Payload: 2.570 kg
 Wheel size: 10" Compact
 Axels: 3 axles, with brakes
 Side material: Aluminium
 Loading height: 57 cm

Also available with gross weight from 3.500 kg to 3.700 kg

Semi-Pro trailer

With 35 cm steel sides and removable corner posts



[Model shown 2015 P2]

Low-built trailer

With 40 cm steel sides



[Model shown 2004 F2]



Powerful drawbars and 40 cm high sides.

VARIANT

2015 P2 Strong trailer



See universal equipment on pages 38-39. Parts shown below are extra accessories.

VARIANT

2004 F2 with low center of gravity



See universal equipment on pages 38-39. Parts shown below are extra accessories.



Powerful corner posts. Dropsides are removable..

2015 P2 Semi-Pro

Powerful leisure and business trailer

Semi-Pro caters to the private hobby user and craftsman with easy need.

The trailer is strong, all 4 steel sides are open and removable. The 4 corner posts give the trailer strength and stability. Standard accessories is jockey wheel and lashing eyes. Extra dropsides, high tarpaulin and hardtop etc. can be purchased.

Low build boogie

With extra strong chassis and heavy-duty drawbar

The 2004 F2 is the trailer for the craftsman who wants a strong trailer with a big load, and at the same time a low loading height. The powerful wheels, the low loading height, 40 cm high sides and gross weight of 2.000 kg makes it a good companion when transporting gravel, sand, machinery etc.

The trailer comes standard with jockey wheel and lashing eyes. Ramps, aluminum floor and net grid are part of the wide range of additional equipment.

ADDITIONAL EQUIPMENT for 2015 P2 and 2004 F2



HARDTOP
Increases trailer volume. Hard quality plastic. Height 100 cm.



EXTRA DROPSIDES
Increases trailer space content. Removable. Height 30 cm.



VENEER LID
Beautiful and powerful quality that can be locked. Fitted with shock absorbers. Height 10 cm.



FLACHPLANE
Keeps trailer and goods dry. Can be supported with tarpaulin rod.



HIGH TARPAULIN
Strong quality with opening in the sides and back. Inside height 105 cm when mounted.



ADDITIONAL EQUIPMENT
Tarpaulin, jockey wheel, trailer lock, ramp, etc. Large selection of accessories.



2015 P2

Inside box size: 255 x 145 x 35 cm
Exterior box size: 260 x 150 x 35 cm
Overall dimensions: 393 x 151 x 101 cm
Gross weight: 2.000 kg
Payload: 1.650 kg
Wheel size: 13"
Axels: 2 axles, with brakes
Side material: Steel
Loading height: 67 cm

Also available with gross weight from 2.000 kg to 1.300 kg



2004 F2

Inside box size: 255 x 145 x 39 cm
Exterior box size: 260 x 150 x 40 cm
Overall dimensions: 392 x 192 x 90 cm
Gross weight: 2.000 kg
Payload: 1.650 kg
Wheel size: 13"
Axels: 2 axles, with brakes
Side material: Steel
Loading height: 52 cm

Also available with gross weight from 2.000 kg to 1.300 kg

SHARP PACKAGE PRICE

(contact a dealer for more information)

2004 F2 with 60 cm net grid

With opening in front and rear. Particularly suitable for transporting firewood, hedge trimming, branches and more. Removable without the use of tools.



INSIDE HEIGHT WITH NET GRID 100 CM.

Low-built trailers - width 150 cm

With steel sides and tip

Trailers with tip

Openable front and rear, as well as inside and outside lashing options, are standard.

754/1304 F1 with tip has shock absorber for tip function, as well as reinforced rear bumper and hinges.

Perfect for transporting light machinery.



[Model shown 754 F1 with tips]

Low-built trailers - width 200 cm

With steel 40 cm sides and tip

F-tipper - suitable for Zero-turn lawn mowers etc.

Strong trailer series with fully welded and hot galvanized chassis. Specially developed for lawn mowers, etc., where low ground clearance at drive-way and extra large width is desired.

The inner width of 195 cm and the simple but strong hydraulics makes the trailer unique.

When the machine is driven off the trailer, the hydraulics automatically fills oil into the cylinder so that the charge stays tipped. The trailer will be ready for the machine to run up again after finished work.

Both models come with 13" compact wheels. It ensures a low center of gravity as well as a low travel angle.

The powerful 70 cm rear ramp is fitted with non-slip aluminum floor plate and 4 strong hinges. Powerful front jockey wheel is standard. Extra accessories such as ramp tracks, high tarpaulin etc.



[Model shown 1519 F1]

Unique trailer with additional wide width

VARIANT

Lightweight trailer



See universal equipment on pages 38-39. Parts shown below are extra accessories.

VARIANT

Fully welded trailer with hot-dip galvanized chassis



See universal equipment on pages 38-39. Parts shown below are extra accessories.



754 F1 with tip

Inside box size: 255 x 145 x 39 cm
Exterior box size: 260 x 150 x 40 cm
Overall dimensions: 390 x 188 x 87 cm
Gross weight: 750 kg
Payload: 520 kg
Wheel size: 13"
Axels: 1 axel, without brakes
Side material: Steel
Loading height: 50 cm
Tipping angle: 14°

Also available with gross weight from 750 kg to 500 kg

1304 F1 with tip

Inside box size: 255 x 145 x 39 cm
Exterior box size: 260 x 150 x 40 cm
Overall dimensions: 395 x 190 x 93 cm
Gross weight: 1.350 kg
Payload: 1.095 kg
Wheel size: 13"
Axels: 1 axel, with brakes
Side material: Steel
Loading height: 52 cm
Tipping angle: 14°

Also available with gross weight from 1.350 kg to 800 kg

715 F1 with tip

Inside box size: 255 x 145 x 27 cm
Exterior box size: 260 x 150 x 28 cm
Overall dimensions: 390 x 188 x 75 cm
Gross weight: 750 kg
Payload: 537 kg
Wheel size: 13"
Axels: 1 axel, without brakes
Side material: Steel
Loading height: 50 cm
Tipping angle: 14°

Also available with gross weight from 750 kg to 500 kg

1315 F1 with tip

Inside box size: 255 x 145 x 27 cm
Exterior box size: 260 x 150 x 28 cm
Overall dimensions: 395 x 190 x 81 cm
Gross weight: 1.350 kg
Payload: 1.045 kg
Wheel size: 13"
Axels: 1 axel, with brakes
Side material: Steel
Loading height: 52 cm
Tipping angle: 14°

Also available with gross weight from 1.350 kg to 800 kg

1519 F1

Inside box size: 314 x 195 x 39 cm
Exterior box size: 320 x 200 x 40 cm
Overall dimensions: 474 x 247 x 121 cm
Gross weight: 1.500 kg
Payload: 1.012 kg
Wheel size: 13" Compact
Axels: 1 axel, with brakes
Side material: Steel
Loading height: 50 cm
Tipping angle: 15°

Also available with gross weight from 1.500 kg to 1.100 kg

1819 F1

Inside box size: 314 x 195 x 39 cm
Exterior box size: 320 x 200 x 40 cm
Overall dimensions: 474 x 247 x 121 cm
Gross weight: 1.800 kg
Payload: 1.312 kg
Wheel size: 13" Compact
Axels: 1 axel, with brakes
Side material: Steel
Loading height: 50 cm
Tipping angle: 15°

Also available with gross weight from 1.800 kg to 1.100 kg

STANDARD ACCESSORIES



Hydraulic tip with hand pump ensures easy and effortless tip of the box. Powerful fasteners and jockey wheels is standard.

STANDARD ACCESSORIES



Extra high rear bumper of 70 cm lined inside with non-slip aluminum floor. 4 strong hinges ensure stable travel.

TARPAULIN



Keeps trailer and goods dry.

HIGH TARPAULIN



Inside height 95/110 cm when mounted.

EXTRA DROPSIDES



Removable. Height 30 cm.

STANDARD ACCESSORIES



Open front.

NET GRID



Strong quality with front and rear opening.

HARD TOP



Hard quality plastic. Height 100 cm.

VENEER LID



Fitted with shock absorbers. Height 10 cm.

STANDARD ACCESSORIES



Jockey wheel is standard on 1304/1315 F1.

RAMP TRACKS



Ribbed driveways for easy and safe drive on and off the trailer.

HIGH TARPAULIN



Strong quality with opening in the sides and back. Internal height mounted - 205 cm.

Machine Trailer

Professional and solid machine trailer with closed sides and 130 cm rear ramp



[Model shown 3518 M4]

MAXI-LOAD Machine trailer



Machine trailer with leaf springs

The powerful suspension is built up with axels with parabolic leaf springs.

The large brake drums with built-in closed bearings ensure stability and good braking performance.

The traction brake has an automatic reverse lock. This ensures easy coupling and disconnection of the trailer.

All models are fully welded and hot-galvanized chassis, beams, drawbars and rear ramps.

The enclosed sides in galvanized steel plate and the heavy-duty wheel fender are standard.

The whole series is well thought out and well equipped.



Platform, spare wheel and jockey wheel are standard.



Powerful wheel fender in aluminum. Robust, non-slip and smooth.

VARIANT MAXI-LOAD Machine Trailer

For heavy daily use



See universal equipment
on pages 38-39.
Parts shown below are extra
accessories.



Length
260 cm

2015 M2

Inside box size: 260 x 150 x 30 cm
Exterior box size: 268 x 158 x 30 cm
Overall dimensions: 439 x 204 x 173 cm
Gross weight: 2.000 kg
Payload: 1.440 kg
Wheel size: 13"
Axels: 2 axels, with brakes
Side material: Steel
Loading height: 40 cm
Ramp angle: 17°

Also available with gross weight from 2.000 kg to 1.100 kg



Length
260 cm

2715 M2

Inside box size: 260 x 150 x 30 cm
Exterior box size: 268 x 158 x 30 cm
Overall dimensions: 439 x 204 x 173 cm
Gross weight: 2.700 kg
Payload: 2.140 kg
Wheel size: 13"
Axels: 2 axels, with brakes
Side material: Steel
Loading height: 40 cm
Ramp angle: 17°

Also available with gross weight from 2.700 kg to 1.600 kg



Length
300 cm

2718 M3

Inside box size: 300 x 180 x 30 cm
Exterior box size: 308 x 188 x 30 cm
Overall dimensions: 498 x 232 x 172 cm
Gross weight: 2.700 kg
Payload: 1.970 kg
Wheel size: 13"
Axels: 2 axels, with brakes
Side material: Steel
Loading height: 40 cm
Ramp angle: 17°

Also available with gross weight from 2.700 kg to 1.600 kg



Length
300 cm

3518 M3

Inside box size: 300 x 180 x 30 cm
Exterior box size: 308 x 188 x 30 cm
Overall dimensions: 498 x 232 x 170 cm
Gross weight: 3.500 kg
Payload: 2.770 kg
Wheel size: 12" Compact
Axels: 2 axels, with brakes
Side material: Steel
Loading height: 38 cm
Ramp angle: 17°

Also available with gross weight from 3.500 kg to 2.700 kg



Length
400 cm

2718 M4

Inside box size: 400 x 180 x 30 cm
Exterior box size: 408 x 188 x 30 cm
Overall dimensions: 597 x 234 x 168 cm
Gross weight: 2.700 kg
Payload: 1.915 kg
Wheel size: 13"
Axels: 2 axels, with brakes
Side material: Steel
Loading height: 40 cm
Ramp angle: 17°

Also available with gross weight from 2.700 kg to 1.600 kg



Length
400 cm

3518 M4

Inside box size: 400 x 180 x 30 cm
Exterior box size: 408 x 188 x 30 cm
Overall dimensions: 600 x 234 x 168 cm
Gross weight: 3.500 kg
Payload: 2.685 kg
Wheel size: 12" Compact
Axels: 2 axels, with brakes
Side material: Steel
Loading height: 38 cm
Ramp angle: 17°

Also available with gross weight from 3.500 kg to 2.700 kg



Length
460 cm

3520 M5

Inside box size: 460 x 198 x 29 cm
Exterior box size: 468 x 206 x 30 cm
Overall dimensions: 660 x 253 x 168 cm
Gross weight: 3.500 kg
Payload: 2.490 kg
Wheel size: 12" Compact
Axels: 3 axels, with brakes
Side material: Steel
Loading height: 38 cm
Ramp angle: 17°

Also available with gross weight from 3.500 kg to 2.700 kg

Machine Trailer

With parabolic leaf springs ensuring strength and high comfort



[Model shown 3518 M4]

Almost all accessories are standard...!



The construction machine trailer series is well equipped as standard. Developed by artisans and contractors who use it every day. The sturdy rear ramp has built-in shock absorber for easy handling and adjustable drop-stands. This ensures you stability in use. Ramp height 130 cm.

In addition, a heavily welded spoon rest (e.g. for the shovel or similar) and a spare wheel integrated underneath - can be found in front of the loading area. Always good to have ... Non-slip pedestals are available on the sides and robust aluminum fenders make getting on and off easy and effortless. A very robust and powerful support wheel as well as internal and external lashing eyes complete the trailer.

Models with a gross weight of 3.500 kg have integrated locks in the ball head coupling.

The entire series is also available with 13 "off-road wheels.

A lot of extra accessories are offered that make the trailer even more versatile.

VARIANT MAXI-LOAD Machine Trailer

Standard and extra accessories



See universal equipment on pages 38-39. Parts shown below are extra accessories.

Standard accessories



Parabolic leaf springs ensure high comfort and strength.



Platform and spare wheel, is standard on all models.



Aluminum wheel fender. Solid and strong. Completes the great exterior.



Shock absorber on ramp for easy handling, as well as adjustable stands.



Powerful jockey wheel. 3.500 kg extra strong. Coupling w/lock on 3.500 kg models.



Non-slip pedestals all around and external lashing eyes.



Solid and strong frame, fully welded and galvanized. High utility value!



Lashing eyes inside, attached at exterior frame for high strength.

EXTRA ACCESSORIES



Increases the life of your trailer and provides safe and non-slip up and down of stock.



13" with rough pattern for woods and construction site. Available for models with a gross weight of 3.500 kg.



Powerful toolbox with built-in lock, for storage of straps etc.



Recessed lashing eyes in the floor. Also offered for aluminum floor.



Beautiful and bright LED light. Good security in the dark.

Beavertail

"Maxi-Load" machine trailer with extra low drive

3516 B3
with a
payload of
2.907 kg



[Model shown 3516 B3]



[Model shown 3518 B4]

VARIANT

MAXI-LOAD Beavertail

With extra high payload



WHEELS



13" with rough pattern for forest and building sites, for 3.500 kg models.

LASHING



Recessed lashing eyes in the floor. Also offered for aluminum floor.

See universal equipment
on pages 38-39.
Parts shown below are extra
accessories.



2716 B3 **NEW**

Inside box size:	300 x 162 x 23 cm
Exterior box size:	306 x 168 x 23 cm
Overall dimensions:	479 x 208 x 150 cm
Gross weight:	2.700 kg
Payload adjustable ramp:	2.172 kg
Payload with full ramp:	2.137 kg
Wheel size:	13"
Axels:	2 axles, with brakes
Side material:	Steel
Loading height:	33 cm
Ramp angle:	19°

Also available with gross weight from 2.700 kg to 1.600 kg



3516 B3 **NEW**

Inside box size:	300 x 162 x 23 cm
Exterior box size:	306 x 168 x 23 cm
Overall dimensions:	482 x 208 x 150 cm
Gross weight:	3.500 kg
Payload adjustable ramp:	2.907 kg
Payload with full ramp:	2.872 kg
Wheel size:	12" Compact
Axels:	2 axles, with brakes
Side material:	Steel
Loading height:	33 cm
Ramp angle:	22°

Also available with gross weight from 3.500 kg to 2.700 kg



2718 B4

Inside box size:	400 x 180 x 30 cm
Exterior box size:	408 x 188 x 30 cm
Overall dimensions:	597 x 234 x 168 cm
Gross weight:	2.700 kg
Payload adjustable ramp:	1.945 kg
Payload with full ramp:	1.915 kg
Wheel size:	13"
Axels:	2 axles, with brakes
Side material:	Steel
Loading height:	31 cm
Ramp angle:	13°

Also available with gross weight from 2.700 kg to 1.600 kg



3518 B4

Inside box size:	400 x 180 x 30 cm
Exterior box size:	408 x 188 x 30 cm
Overall dimensions:	600 x 234 x 168 cm
Gross weight:	3.500 kg
Payload adjustable ramp:	2.715 kg
Payload with full ramp:	2.685 kg
Wheel size:	12" Compact
Axels:	2 axles, with brakes
Side material:	Steel
Loading height:	29 cm
Ramp angle:	12°

Also available with gross weight from 3.500 kg to 2.700 kg



Parabolic leaf springs ensure high comfort and strength.



Platform and spare wheel, is standard on all models.



Aluminum wheel fender. Solid and strong. Completes the great exterior.



Powerful jockey wheel, 3.500 kg extra strong. Coupling w/lock on 3.500 kg models.

Beavertail

"Maxi-Load" machine trailer with extra low drive



The strong construction of the machine trailers, here with the angled rear (Beavertail), makes the trailers particularly suitable for transporting machines and lifts with exceptionally low ground clearance.

With a loading height down to 29 cm, all driveways can be easily handled, whether they are scissor lift, belt excavator or similar.

All models are part of the Maxi-Load program. This means strong leaf springs as well as fully welded and hot-galvanized chassis.

By default, the trailers have 2 slides.

It allows for rear-facing overhang, and custom weight distribution.

All models can be supplied with a full rear ramp for a supplement.

Dropstands on both ramp types ensure stable support during loading and unloading.

Ramp length on B3 models is 118 cm and on B4 models 130 cm.

Non-slip pedestals all around, lashing eyes, platform and nose wheels are also standard accessories.

The B4 models are also equipped with spare wheels, mounted under the platform.

Spare wheels can be purchased for B3 models as additional equipment.

To further strengthen the trailer, whole aluminum floor can be purchased.

For both models with a gross weight of 3.500 kg, 13" terrain wheels with rough pattern can be purchased.

EXTRA ACCESSORIES - full rear ramp



Complete rear ramp for easy rear overhang adjustment.



The aluminum floor shown is extra equipment.

VARIANT

Machine and Tipping trailer

2 in one ..!

[Model shown 3515 MT]



STANDARD ACCESSORIES

Electric hydraulic tipping with built-in battery, charger and remote control with cable. Wireless control via app and smartphone can be purchased (factory assembly only)

Machine Tipper

Machine trailer and tipper trailer, all in one!

High developed trailer series with all the features of the machine trailer and the tipping trailer:

Electric hydraulic tip which is perfect for unloading sand, stone, rubble, etc., as well as a low loading height for machinery and equipment.

All of this is combined in this specially designed "Machine Tipper", as with the low loading height, is particularly suitable for transporting mini excavators. At the same time it can manage unloading of items with a single push on the remote control.

Features that previously required two different trailers.

The strong basic thoughts in this trailer series must be found in the thoroughly tested machine trailers and 3-way tipper from the Variants Maxi-Load series. We simply have taken the best of both types.

The machine tipper series is built on a fully welded and hot galvanized chassis, which



is equipped with leaf springs and brakes from one of Europe's leading manufacturers.

All this helps to ensure high strength and good handling.

Standard accessories is electric hydraulic with built-in battery and charger, powerful jockey wheel, top hinged and detachable rear bumper, ramp drawers under the bar, and 6 powerful inner lashing eyes. The electric-hydraulic system can be switched off with the main switch key.

Lots of extras


Driving ramps for use for driving up machines.

Smooth steel base for easy and effortless unloading of sand, stones and rubble.

Wireless tip is offered by factory mounting of the smart Icarus system.

Strong quality dropstands mounted under the load.

LED lights for bright lighting.

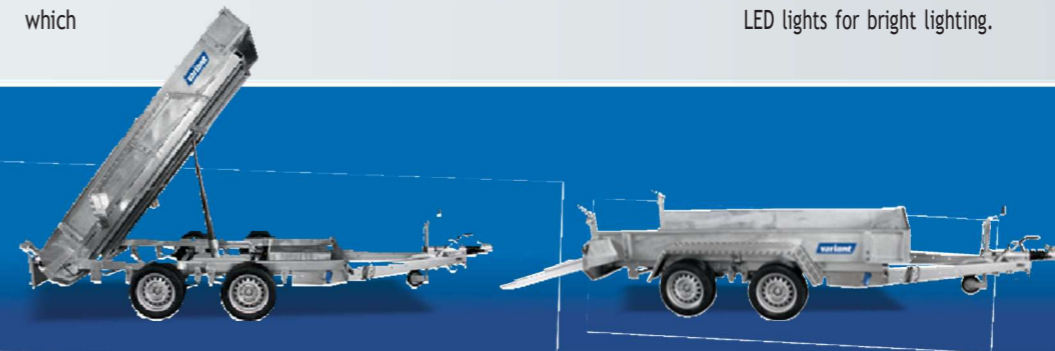

See universal equipment on pages 38-39. Parts shown below are extra accessories.



STANDARD ACCESSORIES

Parabolic leaf springs ensure high comfort and strength.



STANDARD ACCESSORIES

Aluminum wheel fender. Solid and strong. Completes the great exterior.



STANDARD ACCESSORIES

Jockey wheel. With ribs on 3.500 kg models. Coupling with lock on 3.500 kg models.



STANDARD ACCESSORIES

Lockable ramp drawers. Ramps can be purchased.



3015 MT

Inside box size: 300 x 150 x 30 cm
 Exterior box size: 306 x 156 x 30 cm
 Overall dimensions: 456 x 196 x 95 cm
 Gross weight: 3.000 kg
 Payload: 2.150 kg
 Wheel size: 12" Compact
 Axels: 2 axels, with brakes
 Side material: Steel
 Loading height: 46 cm
 Tipping angle: 50°
 Ramp angle: 12°

Also available with gross weight from 3.000 kg to 1.600 kg



3515 MT

Inside box size: 300 x 150 x 30 cm
 Exterior box size: 306 x 156 x 30 cm
 Overall dimensions: 456 x 196 x 95 cm
 Gross weight: 3.500 kg
 Payload: 2.623 kg
 Wheel size: 12" Compact
 Axels: 2 axels, with brakes
 Side material: Steel
 Loading height: 46 cm
 Tipping angle: 50°
 Ramp angle: 12°

Also available with gross weight from 3.500 kg to 2.700 kg



3517 MT NEW

Inside box size: 360 x 170 x 30 cm
 Exterior box size: 366 x 176 x 30 cm
 Overall dimensions: 520 x 215 x 94 cm
 Gross weight: 3.500 kg
 Payload: 2.556 kg
 Wheel size: 12" Compact
 Axels: 2 axels, with brakes
 Side material: Steel
 Loading height: 46 cm
 Tipping angle: 48°
 Ramp angle: 12°

Also available with gross weight from 3.500 kg to 2.700 kg

EXTRA ACCESSORIES



PLATFORM

Platform and spare wheel, is extra accessories.



NET GRID

With opening in front and rear. Height 80 cm.



STEEL FLOOR

Smooth, for easy unloading of gravel, etc. - protects the veneer floor.



DROPSTAND

Powerful model - mounted under the loading area.



RAMPS

For the use of machines in the driveway. The specially developed aluminum ramps have a particularly high level of quality and ensure even access to the trailer. The ramps are stored in an integrated screed shaft during a journey.



LED LIGHT

Beautiful and bright LED light. Good security in the dark.



TOOLBOX

Powerful toolbox with built-in lock, for storage of straps etc.

Uni-trailer

Low loading height, aluminum sides, removable corner and center posts, 90 cm rear ramp, hydraulic tip

[Model shown 3500 U5]



VARIANT

Fully welded and
hot-dip galvanized

Width 210 cm



2700 U4

Inside box size: 420 x 210 x 30 cm
Exterior box size: 425 x 215 x 30 cm
Overall dimensions: 573 x 220 x 159 cm
Gross weight: 2.700 kg
Payload: 1.900 kg
Wheel size: 13" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 63 cm
Ramp angle: 12°

Also available with gross weight from 2.700 kg



2700 U5

Inside box size: 520 x 210 x 30 cm
Exterior box size: 525 x 215 x 30 cm
Overall dimensions: 673 x 220 x 159 cm
Gross weight: 2.700 kg
Payload: 1.820 kg
Wheel size: 13" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 63 cm
Ramp angle: 11°

Also available with gross weight from 2.700 kg



2700 U6

Inside box size: 620 x 210 x 30 cm
Exterior box size: 625 x 215 x 30 cm
Overall dimensions: 773 x 220 x 159 cm
Gross weight: 2.700 kg
Payload: 1.740 kg
Wheel size: 13" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 63 cm
Ramp angle: 10°

Also available with gross weight from 2.700 kg



3521 U4

Inside box size: 420 x 210 x 30 cm
Exterior box size: 425 x 215 x 30 cm
Overall dimensions: 573 x 220 x 159 cm
Gross weight: 3.500 kg
Payload: 2.620 kg
Wheel size: 13" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 63 cm
Ramp angle: 12°

Also available with gross weight from 3.500 kg



3521 U5

Inside box size: 520 x 210 x 30 cm
Exterior box size: 525 x 215 x 30 cm
Overall dimensions: 673 x 220 x 159 cm
Gross weight: 3.500 kg
Payload: 2.540 kg
Wheel size: 13" Compact
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 63 cm
Ramp angle: 11°

Also available with gross weight from 3.500 kg

Uni-trailer

All Uni-trailers come standard with a minimum of 8 heavy-duty folded lashing hooks

[Model shown 3500 U6]



Standard and extra accessories for Uni-trailers

All Uni trailers come with a range of smart details. Eg. manually hydraulic tips, openable and removable sides, and removable center and corner posts. All models come with powerful tilt jockey wheel.

Lots of equipment

Of the accessories that make the trailers multi-usable include:

Extra aluminum dropsides, hinged and removable. Increases volume significantly.

High tarpaulin with internal stand height 205 cm. Can be opened in the sides and rear.

Aluminum floor, extends service life. Provides easy and non-slip ascending and descending.

Electric hydraulic tip complete with battery, charger and wired operation. Also offered as a combined wiring harness and wireless control. Also offered as combined wiring and Icarus control via smartphone.

Winch with wire, manual or electric.

VARIANT

Uni-trailer

Standard and extra accessories



See universal equipment on pages 38-39.

Parts shown below are extra accessories.

STANDARD ACCESSORIES



Powerful plunger tip and manual hand pump. Safe and stable.



Jockey wheel with tilt, hydraulic pump, and powerful coupling.



Powerful rear ramp with shock absorber. Strong closure brackets secure the ramp.



Removable dropsides. Middle and corner posts are removed without the use of tools.



Powerful lashing eyes inside the frame.

EXTRA ACCESSORIES



Increases the life of your trailer and provides non-slip ascending and descending.



Strong quality with side and rear opening. Welded stand. Inner height 205 cm, when mounted.



Provides greater volume. Openable and removable.



Complete with built-in battery and charger. See text above for description of operating options.



Mounted on removable console. Towing capacity 900 kg.



Mounted on removable console. Towing capacity 1.814 kg. Incl. battery and battery box.



Hot galvanized, for lashing of goods. Mounted in the corner posts. Height 70 cm.



Powerful, with lock. 55x25x30 cm (wxdxh). Size 75x30x36 cm (wxdxh) can also be mounted.

1-way tip trailer

Leaf springs and fully welded chassis is standard on the entire series.



[Model shown 1315 T2]



Remote control with cord.
Possibility of managing via app solution on the smartphone can be purchased. (Only for factory mounting)

Strong trailers with tip - 1 or 2 axles



4 models with loading dimensions of 254 x 145 cm, and 1 model with loading dimensions 320 x 168 cm. All models have powerful hydraulic tip cylinder which ensures high and usable tip angle. The smooth steel floor combined with the high tip angle makes unloading easy.

The series has as standard a powerful jockey wheel with tilt, electric-hydraulic tip, wired remote control, as well as battery and charger. The built-in charger with battery and inverter cable for connection to 230 V provides easy and effortless charging, so the trailer is always ready for use. The electric-hydraulic system can be disconnected with the key for the main switch. Wireless tip via handheld control or smartphone can be purchased. A trailer series created for use where the space is tight. The 2717 T3 has lockable ramp drawers under the floor as standard.



Galvanized floor with powerful lashing eyes.



Removable dropsides. Corner posts are removed without the use of tools.



Electric-hydraulic tip, as well as battery and remote control is standard on all models.



Jockey wheel, with tilt for easy maneuvering.

VARIANT

1-way tiptrailer with leaf springs

Strong series with electric-hydraulic tip



Hot galvanized, for lashing of goods. Mounted in the corner posts. Height 70 cm.



Openable and removable. Height 30 cm.

See universal equipment on pages 38-39. Parts shown below are extra accessories.



1315 T2

Inside box size: 254 x 145 x 35 cm
Exterior box size: 259 x 150 x 35 cm
Overall dimensions: 392 x 150 x 102 cm
Gross weight: 1.350 kg
Payload: 825 kg
Wheel size: 13" Compact
Axels: 1 axel, with brakes
Side material: Aluminium
Loading height: 67 cm
Tipping angle: 50°

Also available with gross weight from 1.350 kg to 800 kg



1815 T2

Inside box size: 254 x 145 x 35 cm
Exterior box size: 259 x 150 x 35 cm
Overall dimensions: 392 x 150 x 102 cm
Gross weight: 1.800 kg
Payload: 1.260 kg
Wheel size: 13" Compact
Axels: 1 axel, with brakes
Side material: Aluminium
Loading height: 67 cm
Tipping angle: 50°

Also available with gross weight from 1.800 kg to 1.100 kg



2015 T2

Inside box size: 254 x 145 x 35 cm
Exterior box size: 259 x 150 x 35 cm
Overall dimensions: 397 x 150 x 107 cm
Gross weight: 2.000 kg
Payload: 1.380 kg
Wheel size: 13"
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 70 cm
Tipping angle: 50°

Also available with gross weight from 2.000 kg to 1.100 kg



2715 T2

Inside box size: 254 x 145 x 35 cm
Exterior box size: 259 x 150 x 35 cm
Overall dimensions: 397 x 150 x 107 cm
Gross weight: 2.700 kg
Payload: 2.080 kg
Wheel size: 13"
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 72 cm
Tipping angle: 50°

Also available with gross weight from 2.700 kg to 1.600 kg



2717 T3

Inside box size: 320 x 168 x 35 cm
Exterior box size: 325 x 173 x 35 cm
Overall dimensions: 465 x 175 x 105 cm
Gross weight: 2.700 kg
Payload: 1.948 kg
Wheel size: 13"
Axels: 2 axles, with brakes
Side material: Aluminium
Loading height: 72 cm
Tipping angle: 45°

Also available with gross weight from 2.700 kg to 1.600 kg



Beautiful and bright LED light. Good security in the dark.



Keeps trailer and goods dry. Strong quality. Can be supported with tarpaulin rod.



You can find the recommended ramp set under the trailer model.



Powerful toolbox with built-in lock, for storage of straps etc.



Installed with converter cable for direct connection to a socket. Is recommended.



NET GRID
Can be opened in the front and back. Height 60 cm. Strong hot galvanized quality.

3-way tip trailer

3-way tip - completed and strong trailer series



Part of the strong MAXI-LOAD series

The 3-way tipping trailers are completed, strong and robust. The suspension is exceptional thanks to the axles with parabolic leaf springs, and the large brake drums with closed bearings.

At the same time, the loading height is so low that it is easy to drive machines on the trailer. The 3-way tipper trailer series is made in an extra rigid construction with fully welded and galvanized chassis. Beams, drawbars and even the folded floor are hot-dip galvanized.

Lots of equipment

All models feature heavy lashing eyes, built-in ramp drawers and high tip angle. Electric hydraulic pump, manual emergency pump, built-in battery and charging unit are standard. The braking system has a built-in rear lock, and the powerful contractor jockey wheel provides safe and stable maneuvering.

Tip is done using the wired remote control. Wireless remote control and wireless control via smartphone can be purchased.



[Model shown 3519 TB]

VARIANT MAXI-LOAD tiptrailer

With electric-hydraulic tip



See pictures and benefits by default and extra accessories on the next pages.



3017 TB

Inside box size: 320 x 168 x 35 cm
 Exterior box size: 325 x 173 x 35 cm
 Overall dimensions: 475 x 186 x 120 cm
 Gross weight: 3.000 kg
 Payload: 2.120 kg
 Wheel size: 13" Compact
 Axels: 2 axles, with brakes
 Side material: Aluminium
 Loading height: 72 cm
 Side tipping angle: 47°
 Tipping angle: 45°

Also available with gross weight from 3.000 kg to 1.600 kg



3517 TB

Inside box size: 320 x 168 x 35 cm
 Exterior box size: 325 x 173 x 35 cm
 Overall dimensions: 475 x 186 x 120 cm
 Gross weight: 3.500 kg
 Payload: 2.600 kg
 Wheel size: 13" Compact
 Axels: 2 axles, with brakes
 Side material: Aluminium
 Loading height: 72 cm
 Side tipping angle: 47°
 Tipping angle: 45°

Also available with gross weight from 3.500 kg to 2.700 kg



3519 TB

Inside box size: 361 x 185 x 35 cm
 Exterior box size: 376 x 193 x 35 cm
 Overall dimensions: 514 x 200 x 118 cm
 Gross weight: 3.500 kg
 Payload: 2.480 kg
 Wheel size: 13" Compact
 Axels: 2 axles, with brakes
 Side material: Aluminium
 Loading height: 72 cm
 Side tipping angle: 53°
 Tipping angle: 42°

Also available with gross weight from 3.500 kg to 2.700 kg



3521 B

Inside box size: 414 x 210 x 35 cm
 Exterior box size: 419 x 215 x 35 cm
 Overall dimensions: 560 x 225 x 118 cm
 Gross weight: 3.500 kg
 Payload: 2.344 kg
 Wheel size: 13" Compact
 Axels: 2 axles, with brakes
 Side material: Aluminium
 Loading height: 71 cm
 Side tipping angle: 53°
 Tipping angle: 44°

Also available with gross weight from 3.500 kg to 2.700 kg



WITH 3 AXLES

3321 TB

Inside box size: 414 x 210 x 35 cm
 Exterior box size: 419 x 215 x 35 cm
 Overall dimensions: 560 x 225 x 118 cm
 Gross weight: 3.500 kg
 Payload: 2.263 kg
 Wheel size: 13" Compact
 Axels: 3 axles, with brakes
 Side material: Aluminium
 Loading height: 71 cm
 Side tipping angle: 53°
 Tipping angle: 44°

Also available with gross weight from 3.500 kg to 2.700 kg



3-way tip trailer



[Model shown 3519 TB]

Standard and extra accessories for 3-way tips



All models come with a range of standard equipment that ensures safe and comfortable use - Every day...!

The electric-hydraulic tip is easily operated by the wired remote control.

If the battery is not charged, the manual emergency pump can tip the charge.

The built-in charger with battery and inverter cable for connection to 230 V provides easy and effortless charging so the trailer is always ready for use.

The electric-hydraulic system can be disconnected with the key for the main switch.

Powerful jockey wheel, inner lashing eyes, hot-dip galvanized steel floor, double hinged rear bumper and driving ramp drawers under the load. All is standard equipment that gives pleasure in daily use.

The series is offered with 13" terrain wheels, and models with a gross weight of 3.500 kg are also offered with 14" high profile wheels.

Extra accessories that make the trailer multi-usable:

Netgrid in 60 cm or 100 cm height. Perfect for driving with wood, rubble and more.

Extra aluminum dropsides, hinged and removable. Increases volume significantly.

Flat tarpaulin mounted on top of the sides or as top of net grid.

Ramps when machines etc. needs to be transported. Stored in the lockable compartment under the bed. Easy and convenient.

Heavy-duty dropstand ensure stability of the trailer during use.

Wireless tip, tips via traditional wireless remote control or smartphone (Icarus app).

VARIANT MAXI-LOAD tiptrailer

Standard and extra accessories

EXTRA ACCESSORIES



Tip management can also be done via wireless remote control or smartphone. The wired operation remains mounted.

See universal equipment on pages 38-39.

Parts shown below are extra accessories.

STANDARD ACCESSORIES



Electric hydraulic tip. Complete with built-in battery and charger.



Emergency pump and powerful jockey wheel. Coupling with lock on 3.500 kg models.



4-step piston, provides high tip angle, so gravel etc. easily slides off.



Leaf springs provide perfect suspension. 13" compact wheels provide low loading height.



Hot galvanized steel floor, folded. Lashing eyes. Removable dropsides.



Lockable ramp drawers in length 250 cm. Ramps can be purchased.



Double hinged tailgate. Perfect when gravel should be tipped off.



Fully welded and galvanized chassis and tow bars. Strong.


EXTRA ACCESSORIES



TARPAULIN
Keeps trailer and goods dry. Strong quality. Can be supported with tarpaulin rod.



DROPSTAND
Powerful and rotatable, provide secure and stable loading and unloading. Incl. hand crank for maneuvering.

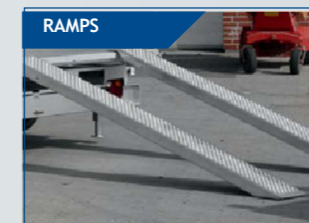

RAMPS
Carrying capacity 4,000 kg per set. With tap for retention during use.



FRONT STAND
Hot galvanized, for lashing of goods. Mounted in the corner posts. Height 70 cm.



NET GRID
Can be opened in the front and back. Height 60 cm or 100 cm. Strong hot galvanized quality.



EXTRA DROPSIDES
Provides greater volume. Openable and removable.



TOOLBOX
Powerful toolbox with built-in lock, for storage of straps etc. 55x25x30 cm (wxdxh).



LED LIGHT
Beautiful and bright LED light. Good security in the dark.

Flat bed trailer

Standard with full aluminum floor, winch with wire, ramps, and powerful jockey wheel



Flat bed - strong series

A good and powerful trailer series has improved ...!

High gross weight, large loading dimensions, leaf springs and good equipment make the trailer series a success.


The standard equipment includes heavy duty aluminum floor, winch with wire and ramps in lockable ramp drawers under the bottom. Combined with low loading height, powerful jockey wheel and lashing eyes, the trailer is ready for any conceivable transport task. Coupling with built-in lock is standard on both 3.500 kg models.

The 3021 L4 and 3522 L5 can also be delivered with 13" compact wheels.

Wheel stops, aluminum dropsides and dropstands can be purchased as additional equipment.



STANDARD ACCESSORIES

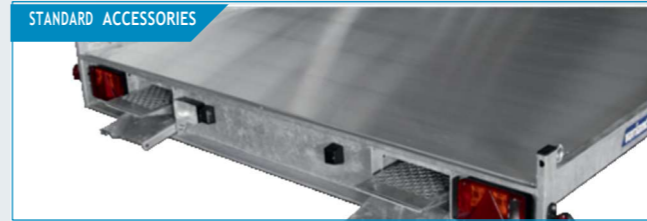

Aluminum floor, heavy build. Non-slip and strong.
Ramps for storage in drawers under the floor. 2,5 m - 4.000 kg

STANDARD ACCESSORIES



Jockey wheel. Extra powerful.
3021 L4 has jockey wheel with tipping.

STANDARD ACCESSORIES



Winch with wire. When cars and machines need to be pulled up on the floor. Console is removable.

VARIANT

MAXI-LOAD Flat bed trailer

Leaf springs for good driving performance



See universal equipment on pages 38-39.
Parts shown below are extra accessories.



3021 L4

Inside box size: 420 x 204 x 4 cm
Overall dimensions: 589 x 211 x 67 cm
Gross weight: 3.000 kg
Payload: 2.360 kg
Wheel size: 10" Compact
Axels: 2 axels, with brakes
Side material: Steel edge 5 cm
Loading height: 55 cm
Ramp angle: 13°

Also available with gross weight from 3.000 kg to 1.600 kg



3521 L4

Inside box size: 420 x 204 x 4 cm
Overall dimensions: 589 x 211 x 70 cm
Gross weight: 3.500 kg
Payload: 2.800 kg
Wheel size: 13" Compact
Axels: 2 axels, with brakes
Side material: Steel edge 5 cm
Loading height: 59 cm
Ramp angle: 14°

Also available with gross weight from 3.500 kg to 2.700 kg



3522 L5

Inside box size: 517 x 219 x 4 cm
Overall dimensions: 645 x 226 x 70 cm
Gross weight: 3.500 kg
Payload: 2.640 kg
Wheel size: 10" Compact
Axels: 3 axels, with brakes
Side material: Steel edge 5 cm
Loading height: 55 cm
Ramp angle: 13°

Also available with gross weight from 3.500 kg to 2.700 kg

WITH 3 AXLES



DROPSIDES



Aluminum, 35 cm. With hinges. Openable and removable.

LED LIGHT



Beautiful and bright LED light. Good security in the dark.

WHEEL STOPS



Powerful transverse rail. Fixed without tool.

WHEEL LASHING



For retaining transported vehicle.

TOOLBOX



Powerful toolbox with built-in lock, for storage of straps etc. 55x25x30 cm (wxdxh).

LOCKS AND NET



Several models. See the wide selection on pages 38-39.

Car Trailers

Standard fitted with hydraulic tip, winch with wire and powerful jockey wheel

[Model shown 2704 A4]



Note the entire width of 200 cm inside.

Variants well-known trailer series for car transport

The series is extra wide. Internal width of 200 cm allows transport of large cars. The trailer is easily tipped with the manual hydraulic pump.

Powerful jockey wheel with tilt is standard for easy maneuvering. Extra accessories: Full steel floor and back plate for center drive. Full steel floor and back plate, together with the standard hydraulic tip, makes transportation of almost any vehicles easy.

Wheel straps and stop blocks are also part of the extra equipment program. The entire range is offered with 14" high profile wheels. For model 3504 A4 at no extra cost.



STANDARD ACCESSORIES
Steel floor with raised holes. Strong and non-slip.



STANDARD ACCESSORIES
Winch with wire. When towing vehicles up on the trailer.



STANDARD ACCESSORIES
Hydraulic tip, easily operated. Jockey wheel for man and jockey wheel. The trailer is easily maneuvered.



STANDARD ACCESSORIES
Cyclist protection for safety. Can also be used for ascent and descent.

VARIANT

Vehicle transport

Wide cargo - for transporting cars



See universal equipment on pages 38-39. Parts shown below are extra accessories.



2004 A4

Inside box size: 412 x 200 x 21 cm
Overall dimensions: 598 x 243 x 93 cm
Gross weight: 2.000 kg
Payload: 1.380 kg
Wheel size: 13"
Axels: 2 axles, with brakes
Side material: Steel
Loading height: 48 cm
Ramp angle: 10°

Also available with gross weight from 2.000 kg to 1.300 kg



2704 A4

Inside box size: 412 x 200 x 21 cm
Overall dimensions: 598 x 243 x 93 cm
Gross weight: 2.700 kg
Payload: 2.080 kg
Wheel size: 13"
Axels: 2 axles, with brakes
Side material: Steel
Loading height: 48 cm
Ramp angle: 10°

Also available with gross weight from 2.700 kg to 1.800 kg



3504 A4

Inside box size: 412 x 200 x 21 cm
Overall dimensions: 599 x 245 x 93 cm
Gross weight: 3.500 kg
Payload: 2.855 kg
Wheel size: 13" Compact
Axels: 2 axles, with brakes
Side material: Steel
Loading height: 48 cm
Ramp angle: 10°

Also available with gross weight from 3.500 kg to 2.700 kg



STEEEL FLOOR
Fully hot-dip galvanized steel base with raised holes. Back plate can be purchased.

The 2 middle plates form 110 cm of the total width of 200 cm.



BACK PLATE
Accessories for full steel floor. Removable without use of tools.



WHEEL LASHING
Can be used with stop blocks as shown in the picture.



TOOLBOX
Powerful toolbox with built-in lock, for storage of straps etc. 55x25x30 cm (wxdxh).



STOP BLOCKS
Set of 2 pieces, mounted at the floor without use of tools.



LED LIGHT
Beautiful and bright LED light. Good security in the dark.



LOCKS AND SPARE WHEEL
Several models. See the wide selection on pages 38-39.

- Practical accessories for your new trailer

TARPAULIN

Protects your goods and the trailer from wind and weather. We recommend a tarpaulin rod.



TARPAULIN ROD

Supports tarpaulin, so rain and snow runs off.

RAMPS

Curved or straight. You can find recommended ramps under the trailer model.



TOOLBOX

Several models for over or under mounting. Brackets for easy attachment can be purchased.



LOCK AND ADAPTER

Large selection of locks for securing the trailer. Adapters for proper connection to the car's electrical system.



DROPSTANDS

Provides support for ascending and descending in the trailer.



TRAILERNET

Can be used for transportation of garden waste. Strong quality in different sizes.



JOCKEY WHEEL

Large selection of jockey wheels in different sizes and strengths. Clamping bracket for secure attachment of jockey wheels.



SPARE WHEEL

To all models. Good to have when puncturing. Can be fastened with a bracket.




Large selection of boat-, and cargo trailers



20 / 21

Danish boat trailers

MADE IN DENMARK



Boat trailers · Jetski trailer · Canoe - and kayak trailer



VARIANT - Quality on the hook

Power Connector

All trailers are delivered with 13 poles power connectors.

If the towing vehicle has 7 poles plug an adapter can be used.

20 / 21

Danish cargo trailers

MADE IN DENMARK



Cargo trailers · Top cargo · Cooling trailers · Freezing trailers · Material trailer



VARIANT - Quality on the hook

Dealer:

