

### Shenzhen Filterwell Technology Co., Itd

# 深圳市净益科技有限公司



### **Products list**

- Reverse osmosis -RO membrane
- Ultra Filtration –UF hollow Fiber membrane
- Filter Media& Multi Function cartridge
- Portable & Personal water filter for Outdoor & emergency
- RV /Car water filter / Camping water filter
- Other outdoor &Portable water filter products




### Reverse Osmosis Introduction

RO is the abbreviation of Reverse Osmosis in English, Flow direction of water usually from low concentration to high concentration. Once the water is pressurized, it will flow from high concentration to low concentration, which is the so-called reverse osmosis principle. The pore size of RO reverse osmosis membrane is as small as nanometers (1 nanometer = 10\*-9 meters). Under certain pressure, water molecules can pass through the RO membrane, while the source water contains inorganic salts, heavy metal ions, organic matter, colloids, bacteria, and viruses. Impurities cannot pass through the RO membrane, so that the permeable pure water and the impenetrable concentrated water are strictly distinguished.



### Ultra Filtration Hollow Fiber membrane

Hollow fiber ultrafiltration membranes are widely used in the field of terminal water purification due to its advantages such as high packing density, large effective membrane area, high pure water flux, simple operation and easy cleaning . There are about 6 billion 0.01 micron pores on the wall of each meter-long ultrafiltration membrane filament tube. Its pore size only allows water molecules, beneficial minerals and trace elements in the water to pass through, and the smallest bacteria have a volume above 0.02 microns . Therefore, bacteria, as well as colloids, rust, suspended solids, sediments, and macromolecular organics that are much larger than bacteria can be intercepted by the ultrafiltration membrane, thereby realizing the purification process.  $\circ$ 

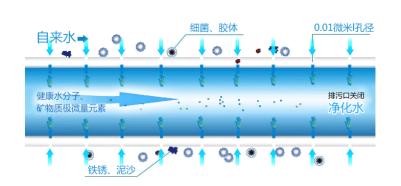






### KDF-CUZN Filter Media

KDF is a kind of copper alloy with high purity, which can adsorb heavy metals in water and reduce hard water ions such as calcium and magnesium. The fiber morphology has a specific surface area of more than 20 times, through the reaction of heavy metals and acid ions in water, the activation degree of water is improved. The principle of KDF in water treatment is to use redox reaction. KDF exchanges electrons with oxidizing and harmful substances in water, which turns many harmful substances into harmless substances .




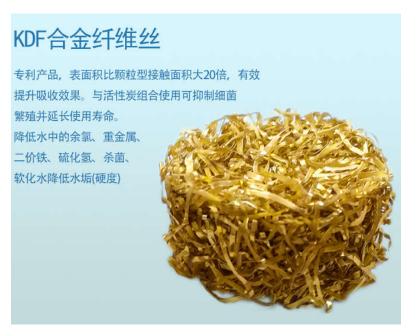



### Nano Activated Carbon Fiber-Filter Media

Nano activated carbon fiber have adsorption capacity to inorganic matter, dye, organic matter and heavy metal. It aqueous solution is 5-6 times higher than that of granular activated carbon. For example, the adsorption rate of Escherichia coli can reach 94-99%. It also has high adsorption capacity for low concentration ppm level pollutants.

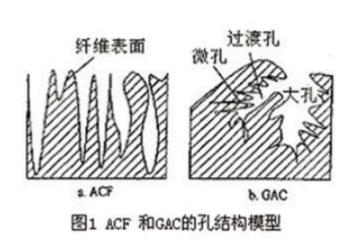





### Water Filter Straw-1

- Unique Clip for hook
- Multi Function Silicone Rubber Flexible Adaptor suit for Most of PET bottle and Squeeze Pouch
- Faucet mount & Gravity Filtration available
- SGS Bacteria Filter passed, Products Material Meet NSF/EPA Standard.
- 3-5 Filter grade for selection. customized design available







### Water Filter Straw-2

- Activated carbon fiber (for decolorization, deodorization, removal of organic matter, residual chlorine, and improvement of taste)
- The adsorption of heavy metal ions in water is reduced by KDF CUZN Filter Media
- UF ultrafiltration filter element (hollow fiber filter element, high filtration precision, filtration aperture of 0.01  $\mu$  m, to ensure the safety of drinking water quality)
- The inlet sand head can carry out coarse filtration of sediment, algae and other visible solid suspended solids, and protect the filter material of the later stage.







### Water Filter Straw-3

- Activated carbon fiber (for decolorization, deodorization, removal of organic matter, residual chlorine, and improvement of taste)
- UF ultrafiltration filter element (hollow fiber filter element, high filtration precision, filtration aperture of 0.01  $\mu$  m, to ensure the safety of drinking water quality)
- The inlet sand head can carry out coarse filtration of sediment, algae and other visible solid suspended solids, and protect the filter material of further stage.





9



# Hydration Flask& Filter straw



Blue 500/700ML available .Other color available for bulk Quantity

2021-10-20 outdoor water filter solutions 10



# Hydration Flask& Filter straw



Pouch: Anti-Bacteria TPU

Bite Nut Material :TPE

Flask Cap Material :TPE

**Color choice:** 







Other sport water bottle & Pouch DIY Availible



### Inline RV water filter 1

portable and lightweight, faucet & car pump & car wash pump drive is universal and adaptable, suitable for car & RV camping filtered water for 4-8 people cooking and cleaning
•Coconut shell Activated carbon, Reduces bad taste, odor, chlorine, and sediment. 20 micron sediment filter: Removes particles greater than 20 microns.

•The replaceable filter element can filter up to 3 month7000L (1500 gallons); It produces a flow rate of 3-5 liters/min; garden hose US GHT ¾' connector, copper nipple connector as option.





Customized design As below (1/2" In& out available ):



### Inline RV water filter Plus (Group)

















VOC, THM's



### Inline RV water filter -Jumbo

portable and lightweight, faucet & car pump & car wash pump drive is universal and adaptable, suitable for car & RV camping filtered water for 4-8 people cooking and cleaning

- •carbon block Filter /CTO & pp pleated filter /Coconut shell Activated carbon& KDF variable solutions , Reduces bad taste, odor, chlorine, and sediment. 1-20 micron sediment filter: Removes particles greater than 1-20 microns.
- Jumbo filter element can filter up to 6-8month 20000L ( 6000gallons); flow and life spam larger than standard .flow rate of 8-10 liters/min; garden hose US GHT  $\frac{3}{4}$ ' connector , copper nipple connector as option .



Customized design quick garden hose conector availiable



### RV water filter Plus (Group)

#### Customized design:

- 1:CTO -1 micron Activated Carbon block
- 2: Granular Activated Carbon +Kdf 55
- 3 Granular Activated Carbon +Kdf 55+Fluoride& Chlorine remove
- 4:Ultra Filtration-Hollow fiber membrane + Granular Activated Carbon
- 5: Ultra Filtration-Hollow fiber membrane &KDF55 & Granular Activated Carbon
- 6:CTO -1 micron Activated Carbon block & KDF55

#### MULTIPLE USAGES



#### For RVs

Clean and tasty drinking water quenches your thirst, keeps you hydrated and makes you feel energetic even during long time travel in RVs.



#### For Boats

You don't have to buy bottled water, just need to drink great-tasting water from your tank with this inline water filter. Carry less and enjoy more.



#### For Gardening

Improves the health of your plants and soil significantly by filtering out the chlorine, chloramine and unwanted chemicals in your water.



For Car Washing

Efficient and easy to reduce water spot etching from your car's paint with clean fresh water from our RV water filter, no more worry about that.



# RV water filter system 1

portable and lightweight, faucet & car pump & car wash pump drive is universal and adaptable, suitable for car & RV camping filtered water for 4-8 people cooking and cleaning Clear vessel with replaceable Filter cartridge .self bracket & soft Nylon handle availiable .

- •Coconut shell Activated carbon, Reduces bad taste, odor, chlorine, and sediment. 20 micron sediment filter: Removes particles greater than 20 microns.
- •The replaceable filter element can filter up to 6-8month 20000L (6000gallons); It produces a flow rate of 8-10 liters/min; garden hose US GHT ¾' connector, copper nipple connector as option.



Customized design As below (1/2" In& out available):



# RV water filter system (Group)



2021-10-20 outdoor water filter solutions 18



# Portable gravity/Car wash pump/Faucet Filter

- Multi-stage filtration melt blown PP filter element + hollow fiber pressure less ultrafiltration + carbon fiber taste improvement,
- portable and lightweight, gravity drive / sink hand pump faucet / car wash pump drive is versatile and adaptable, suitable for camping, backpacking, hiking and survival;
- Filtered Water for 1-4 people (cooking and cleaning).replaceable filter element can filter up to 6000 gallons; the flow rate is 1.0 -3.0 liters/min;
- complies with all EPA/NSF requirements for removing 99.9999% of bacteria and 99.9% of protein, including Giardia, Cryptosporidium, E. coli, Salmonella, Cholera
- Including hollow fiber filters, hoses, adapters (Can add water barrel through plate joint as gravity filter)





# Manual Pump water filter-RO

#### **Features introduction:**


- High filtration precision, nanometer level.
   Directly produce pure water, can filter heavy metals, salt, etc., TDS or conductivity can be tested.
- 2. Comply with all EPA/NSF about removing 99.9999% of bacteria and 99.9% of protein, including Giardia, Cryptosporidium, E. coli, Salmonella, Cholera
- Engineering plastics and stainless steel pipe structure is strong. Ergonomic design, more labor-saving.
- 4. Three-stage filtration design can produce purified water with different precision levels according to actual needs.
- 5. Inlet and outlet of pagoda mouth. The pipeline connection is firm, not easy to slip off
- 6. The product is small in size, light in weight (500g), and the total flux in the life is 8000L. Versatile and adaptable, suitable for camping, backpacking, hiking and survival;



20



# Manual Pump water filter-RO

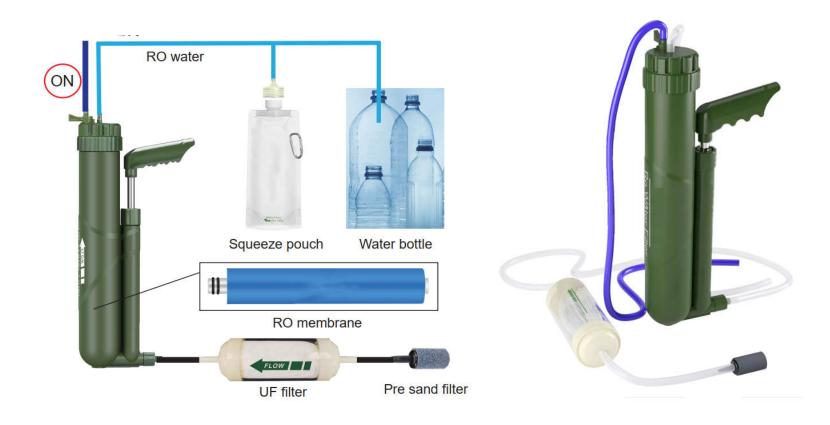


2021-10-20 outdoor water filter solutions 21



### Manual water filter- UF Combination

- 1. High filtration accuracy, 0.01 micron level (filter viruses and microorganisms). Carbon fiber & KDF composite can significantly improve the taste and absorb heavy metals. Black carbon ink test.
- 2. Engineering plastics and stainless steel pipe structure are firm. Ergonomic design, more labor-saving.
- 3. Three-stage filtration design can produce purified water with Micron precision levels for drinking.
- 4. Inlet and outlet of pagoda mouth . The pipeline connection is firm, not easy to slip off
- 5. The product is small in size and light in weight (370g), with a total flux of 8000L life spam.

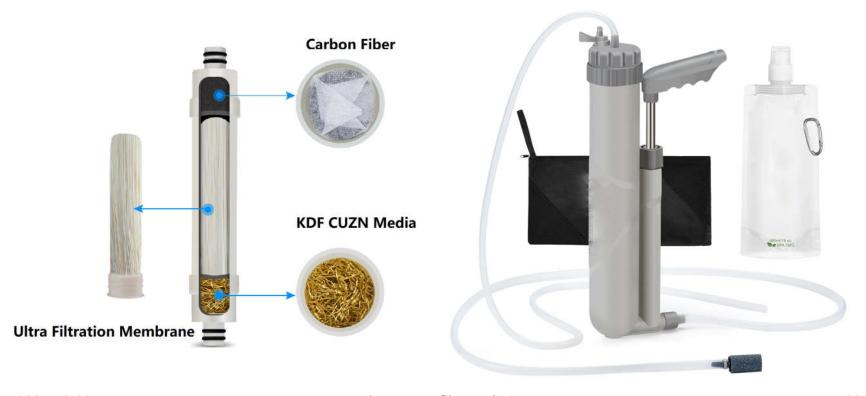



### Manual water filter- CTO Combination


- 1. High filtration accuracy, 1 micron level (filter viruses and microorganisms). Carbon block filter & Carbon fiber & KDF composite can significantly improve the taste and absorb heavy metals. Black carbon ink test.
- 2. Engineering plastics and stainless steel pipe structure are firm. Ergonomic design, more labor-saving.
- 3. Three-stage filtration design can produce purified water with Micron precision levels for drinking.
- 4. Inlet and outlet of pagoda mouth . The pipeline connection is firm, not easy to slip off
- 5. The product is small in size and light in weight (370g), with a total flux of 8000L life spam.





### Manual water filter-Double UF

- 1. High filtration accuracy, 0.01 micron level (filter viruses and microorganisms). Carbon fiber & KDF composite can significantly improve the taste and absorb heavy metals. Black carbon ink test.
- 2. Engineering plastics and stainless steel pipe structure are firm. Ergonomic design, more labor-saving.
- 3. Three-stage filtration design can produce purified water with Micron precision levels for drinking.
- 4. Inlet and outlet of pagoda mouth . The pipeline connection is firm, not easy to slip off
- 5. The product is small in size and light in weight (370g), with a total flux of 8000L life spam .

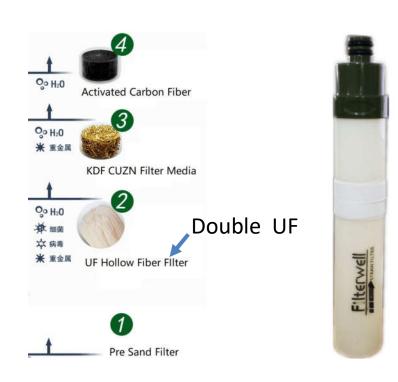





### Manual water filter Bucket- UF &carbon fiber

- 1. 20 Micron sediments filter as pre filtration .High filtration accuracy, 0.01 micron level (filter viruses and microorganisms).Carbon fiber can significantly improve the taste and absorb heavy metals. Black carbon ink test.
- 2. 3-5Liter Bucket volume for Selection .Output water flow rate 1.0-1.5L per mins . Hand operated gas inject pump with Hand Switch valve
- 3. Three-stage filtration design can produce purified water with Micron precision levels for drinking. complies with all EPA/NSF requirements for removing 99.9999% of bacteria and 99.9% of protein, including Giardia, Cryptosporidium, E. coli, Salmonella, Cholera.
- 4. The product is small in size and light in weight (570g), with a total flux of 8000L life spam.






# Filterwell

# Qualification /certification-SGS third party testing



SGS Total coliforms for water filter straw



Remark: "Removal rate (%) = (Influent spiked water test result - Effluent filtrated water test result)

Unit 2

Unit 1 Unit 2

> 99.9 > 99.9

#### SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.



Unit(s)

CFU/100mL

item(s)

nethod(s)

5750.12-

spiked

reatment Device of Drinking Water

Not Detected

3° Building No. 889; Yishan Road, Shanghai China 200233 1 400 - 691 - 0488 [ (85-21) 6140 2547 中国、上海·宜山路889号3号楼 船舶:200233 1 400-691-0488 1 (85-21) 6140 2547 a squ.china@squ.com

Member of the SGS Group (SGS SA)

# Filterwell

# Qualification /certification-SGS third party testing



SGS

**Test Report** 

NBF21-002885-02

Date: 16 Apr 2021



Sample photo:



SGS authenticate the photo on original report only

**Test Report** NBF21-002885-02 Date: 16 Apr 2021 Sample Description: SGS Sample ID Description NBF21-002885.001 Portable UF hand pump water filter Selected test(s) as requested by applicant: Removal rate of Total coliforms at startup. Test Strain(s): Escherichia coli CICC 10389 Test Method: Test wemou:

Removal rate of Total coliforms: Refer to Ministry of Health of the People's Republic of China Standards for Drinking Water Quality Sanitary Standard for Hygienic Safety and Function Evaluation on Treatment Devices of Drinking Water-General Devices & GB/T 5750.12-2006 Standard examination methods for drinking water-Microbiobgical parameters

Test item(s)	Unit(s)	Test method(s)	Te	est result(s			
			Influent spiked water	Effluent filtrated water1	Effluent filtrated water2	*Removal rate(s)1(%)	*Removal rate(s)2(%)
Total coliforms	CFU/100mL	GB/T 5750.12- 2006	1.7×10 <sup>6</sup>	0	0	99.9967	99.9989

Remark: 1.\*Removal rate (%) = (test result of Influent spiked water- test result of Effluent filtrated water)/ test result of Influent spiked water×100% 2.The flow rate is 1.0L/min

SGS Total coliforms for portable UF water filter

SGS-CSTC Standards Technical Services Co., Ltd.Ningbo Branch



# Filterwell Outdoor Water Solutions

# Qualification /certification-SGS third party testing



Test Report
Sample photo:

NBF21-002886-04

Date: 21 Apr 2021



SGS authenticate the photo on original report only

\*\*\* End \*\*\*



SGS Heavy metal Rejection for portable RO water filter



Test Report NBF21-002886-04

Date: 21 Apr 2021

Sample Description:

Specimen No. SGS Sample ID Description

NBF21-002886.001 Portable RO hand pump water filter

Test Requested:

Selected test(s) as requested by applicant:

Removal rates of Arsenic (As), Mercury (Hg), Cadmium (Cd), Lead (Pb) at startup.

**Test Method** 

Removal rates of Arsenic (As), Mercury (Hg), Cadmium (Cd), Lead (Pb): Refer to Ministry of Health of the People's Republic of China Standards for Drinking Water Quality Sanitary Standard for Hygienic Safety and Function Evaluation on Treatment Devices of Drinking Water-Reverse Osmosis Device & GB/T 5750.6-2008 Standard examination methods for drinking water — Metal Parameters Metal Parameters Inductively coupled plasma mass spectrometry (ICP/MS





#### Test Result(s):

Test item(s)	Unit(s)	Test method(s)	Test result(s)					D
			Influent spiked water	Effluent filtrated water1	Effluent filtrated water2	*Removal rate(s)1(%)	*Removal rate(s)2(%)	Requirement(s) of Removal rate(%)
Arsenic (As)	mg/L	GB/T 5750.6- 2006	0.3430	0.0115	0.0100	96.65	97.08	≥83
Lead (Pb)	mg/L	GB/T 5750.6- 2006	0.1816	<0.0005	<0.0005	>99.72	>99.72	≥90
Mercury (Hg)	mg/L	GB/T 5750.6- 2006	0.0065	<0.0002	<0.0002	>96.92	>96.92	≥80
Cadmium (Cd)	mg/L	GB/T 5750.6- 2006	0.0359	<0.0002	<0.0002	>99.44	>99.44	≥83

#### Remark

1. Removal rate (%) = (test result of Influent spiked water- test result of Effluent filtrated water)/ test result of Influent spiked water×100%

2. The flow rate is 0.2 (min.)

SGS-CSTC Standards Technical Services Co., Ltd.Ningbo Branch Page 2 of 3



United Entered Agreed in white, the focused is issued by the Cympany point is to General Conditions of Service print Condition and Condition

Member of the SGS Group (SGS SA)

# Qualification /certification-China National Health inspection



Ultra Filtration Filter

样	品受理	里编号	: JK	S20040055					第 2页/共 3页
样	品	名	称	Filter well 牌超滤膜滤芯	接	样	H	期	2020-04-28
送	检	单	位	深圳市净益科技有限公司	样	品	数	量	6支
生	r <sup>he</sup>	单	位		样	品	性	状	蓝色壳体+内部白色拉丝状
生产	- 日	朔或排	比号	20200410	检	验	项	目	卫生安全浸泡试验
型	号 ]	及 规	格	直径Φ45mm*长度 110mm	检!	验完	成日	期	2020-05-08

表 1 卫生安全性检验结果

304 e3+ y05 Ed	M D		测定结果	the also have the part of the	obstate.		
测定项目	单位	空白	样品1	样品 2	卫生规范要求	判定	
色	度	<5	<5	<5	增加量≤5度	合格	
浑浊度	NTU	< 0.10	< 0.10	< 0.10	增加量≤0.2 NTU	合格	
臭和味	1	无异臭、异味	无异臭、异味	无异臭、异味	无异臭和异味	合格	
肉眼可见物	1	无	无	无	不得有	合格	
pH	1	6.76	6.72	6.72	改变量≤0.5	合格	
溶解性总固体	mg/L	5	10	9	增加量≤10 mg/L	合格	
耗氧量	mg/L	0.30	0.51	0.52	增加量≤1 mg/L	合格	
种	mg/L	< 0.0001	< 0.0001	< 0.0001	增加量≤0.001 mg/L	合格	
部	mg/L	< 0.0001	< 0.0001	< 0.0001	增加量≤0.0005 mg/L	合格	
铬 (六价)	mg/L	< 0.004	< 0.004	< 0.004	增加量≤0.005 mg/L	合格	
铝	mg/L	< 0.0001	< 0.0001	< 0.0001	增加量≤0.02 mg/L	合格	
铅	mg/L	< 0.0001	< 0.0001	< 0.0001	增加量≤0.001 mg/L	合格	
汞	mg/L	< 0.0002	< 0.0002	< 0.0002	增加量≤0.0002 mg/L	合格	
铁	mg/L	0.0022	< 0.0001	< 0.0001	增加量≤0.06 mg/L	合格	
锰	mg/L	0.0001	< 0.0001	< 0.0001	增加量≤0.02 mg/L	合格	
铜	mg/L	< 0.0001	0.0003	0.0003	增加量≤0,2 mg/L	合格	
<b>往</b> 辛	mg/L	< 0.0001	0.0012	0.0012	增加量≤0.2 mg/L	合格	
银	mg/L	< 0.0001	< 0.0001	< 0.0001	增加量≤0.005 mg/L	合格	
钡	mg/L	< 0.0001	0.0006	0.0006	增加量≤0.05 mg/L	合格	
转	mg/L	< 0.0001	< 0.0001	< 0.0001	增加量≤0.0005 mg/L	合格	
锡	mg/L	< 0.0001	< 0.0001	< 0.0001	增加量≤0.002 mg/L	合格	

以下空白

Filterwell



# Qualification / certification-China National Health inspection



#### 涉及饮用水卫生安全产品 卫生许可批件

产品名称	反滲透滤膜					
产品类别	水处理材料					
产品规格或型号	直径Φ (40-200) mm×长度 (150-1016) mm					
申请单位						
中请单位地址	深圳市坪山新区坑梓街道龙田社区党展工业区 D3 栋 3 楼					
实际生产企业						
实际生产企业地址	深圳市坪山新区坑梓街道龙田社区莹展工业区 D3 栋 3 楼					
审批结论	经审核,该产品符合《生活饮用水卫生监督管理办法》的有关 规定,现予批准。					
批准文号	粤卫水字(2016)第 s9227 号 2016 年 10 月 14 日					
批准日期						
批件有效期	截至 2020 年 10 月 13 日					
备注	<ol> <li>如果存在多个生产企业的,应分别注明每个实际生产企业的名称和地址。</li> <li>本批件只对与所载明内容(包括名称、类别、规格、申请单位、企业、附件内容等)一致的产品有效,且必须在本批件注明的实际生产企业生产。</li> <li>批准时仅对其所申报材料对决产量的进行净价。</li> <li>批准时仅对其所申报材料对决产量的进行净价。</li> <li>需要备注的其他内容。</li> </ol>					

RO批件&检测报告

溪圳市涉及饮用水卫生安全产品许可批供附供

产品说明:产品为水处理材料(滤芯),执行标准: GB/T 30306-2013 规 格: 直径 Φ (40-200) mm×长度 (150-1016) mm 主要成分或部件: ABS 中心管、聚酰胺膜片、流道布、PP 网格 使用范围:用于家用净水器的过滤滤芯 注意事项:

- 1, 适用温度:0-40℃
- 2, 使用前应冲洗 5-10min
- 3, 需定期更换

# Filterwell Outdoor Water Solutions

# Qualification /certification-Spare Parts and Filter Media



Report :SGS FDA ROHS



Filter Design and structure patents



PATENTED PRODUCTS: water filter straw, Portable RO /UF water filter/Rv water Filter



### Shenzhen Filter well Technology Co.ltd

ADD: Longwan road No.12 Pingshen Kengzi longtian community.

Phone&wechat Whatapp: 0086 13760415747 Mr wade lee

Email &skype: lb636482@outlook.com

Website: www.Filter-well.com