



STEK 2 COLOR (Ratio) Marathon Fiber Optic Infrared Thermometer



STEK Fiber Optic Marathon Series is a highly accurate digital two color radiation Fiber Optic IR Pyrometer. This device measures the temperature of an object by calculating the ratio of the energies at two different wavelength bands. The ratio technique eliminates and reduces errors in temperature measurement caused by changes in Emissivity, Surface finish and energy absorbing materials such as water vapor etc.

The Fiber Optic Pyrometers are widely used in high ambient temperature applications without cooling up to 250°C and also in processes involving electromagnetic interferences

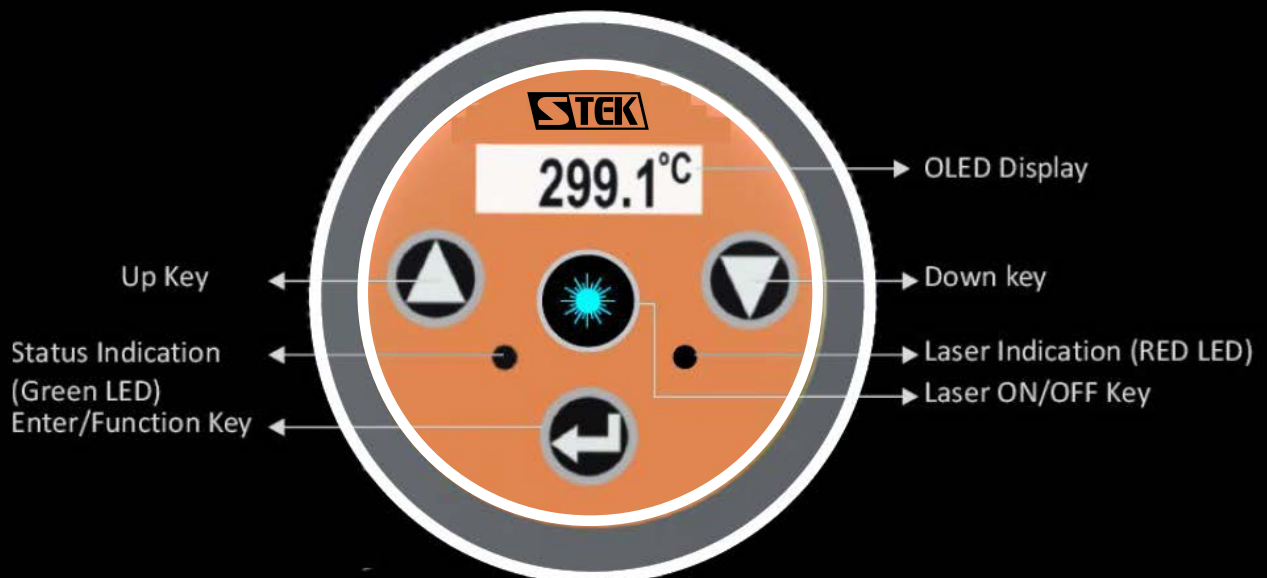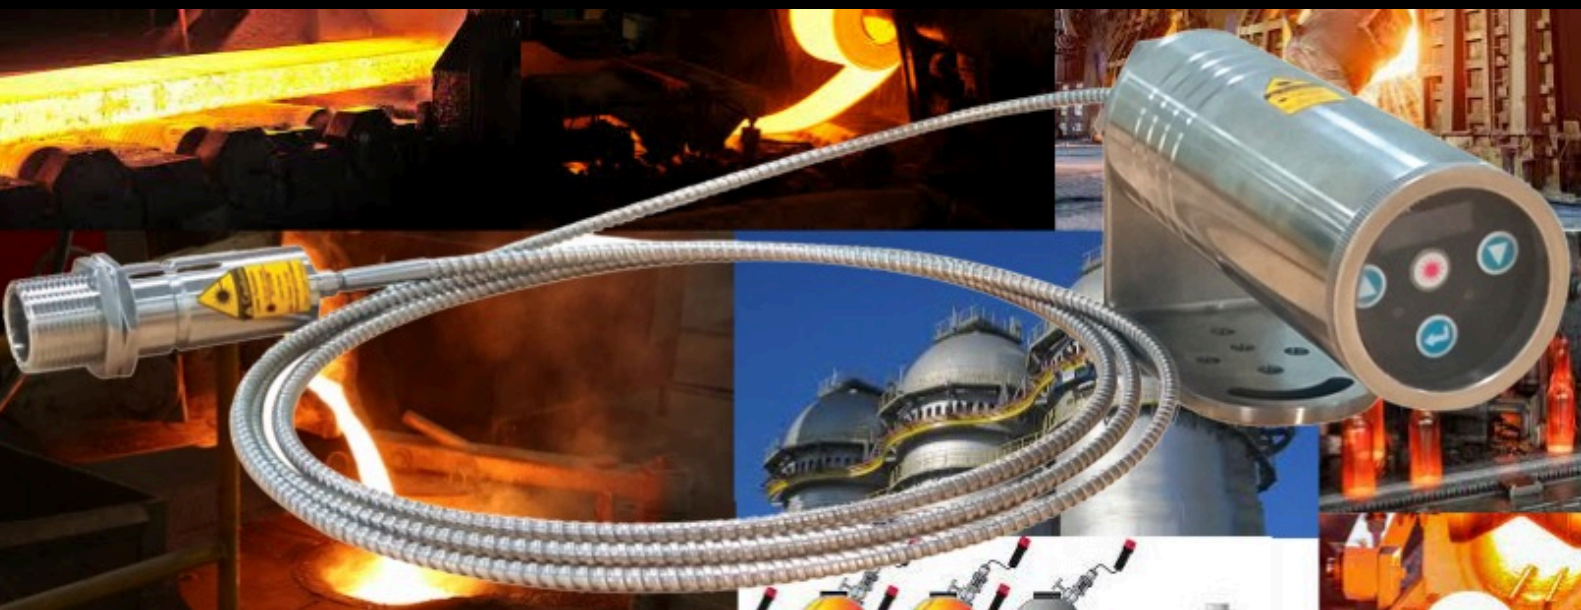

- Pyrometer with Rugged mono fiber optics withstands ambient up to 250°C
- Two Color model
- Spectral range 0.7 μm ...1.15 μm
- Wide temperature range from 800°C....3200°C
- Useful In applications involving electromagnetic fields. ˆ Analog output options 0...20mA or 4...20mA or 0-10
- High Optical Resolution
- Laser targeting light for high precision targeting
- Bluetooth V2.0
- RS -232/RS-485 serial interface




- Blast Furnace Stove Dome
- Welding
- Casting
- Forging
- Annealing

- Sintering
- Rolling mill
- Rotary kilns
- Pouring stream
- Microwave Heating

FR SERIES 2 Colour Ratio Fiber Optic Pyrometer	
Temperature Range (Analog sub-range adjustable)	700°C....1500°C (MODEL: FR1SBSF) 1000°C....3200°C (MODEL:FR1CSF)
Spectral Range	0.7 μm...1.15 μm
Photodetector Type	Si/Si
Distance to Spot Size Ratio	100:1 OH(I) 200:1 OH(II) 200:1 OH(II-V)
Emissivity (ε)	0.1....1.0 adjustable(Single Color mode)
Emissivity Slope (ε1 / ε2)	0.75...1.25 slope adjustable (Two color mode)
Response Time	20 msec adjustable upto 10 sec
Accuracy	± 0.5% of the measured value + 1°C
Repeatability	0.1% of reading in °C + 1°C
Sighting Option	Laser Pilot Light (PL)
Analog Output	0-20mA, 4-20mA, 0-10V (User selectable)
Digital Output	Bluetooth V2.0, RS-232/RS-485 (User selectable),*At a time only one digital output
Operating Temp. Range	Pyrometer 0°C.....70°C Optical head and Fibre Optic Cable upto 250°C
Storage Temp.	-20°C...70°C
Adjustable Parameters and Features via Software	Emissivity, Emissivity Slope, Response Time, Clear Time(Peak Picker), Analog Output, Analog Scale(Sub range),Sensor type (Switches b/w 2-color or single color), Switch off level, Unit Of Temperature(°C/°F), Communication mode(Comm.mode), Record feature etc
Power Supply	12V to 28V DC with reverse voltage protection
Power Consumption	Max 2.5 watt
Laser Power	<1 m watt
Protection Class	IP65
Housing	Stainless Steel
Isolation	Power supply, *Digital output and Analog output are galvanically isolated against each other
Operating Humidity	10-95%, Non-Condensing Conditions
Weight & Dimensions	600gDia= Ø 49.5 mm; Length=118mm

		700°C - 1500°C	1000°C - 3200°C
Optical Head	Working Distances (mm)	Spot	Spot Sizes(mm)
 Optical Head 1	120	1.2	1.2
	260	2.6	2.6
	700	7	7
	Aperture(mm)	10	10
 Optical Head 2	90	0.5	0.5
	200	1	1
	600	3	3
	4500	23	23
	Aperture(mm)	5	4

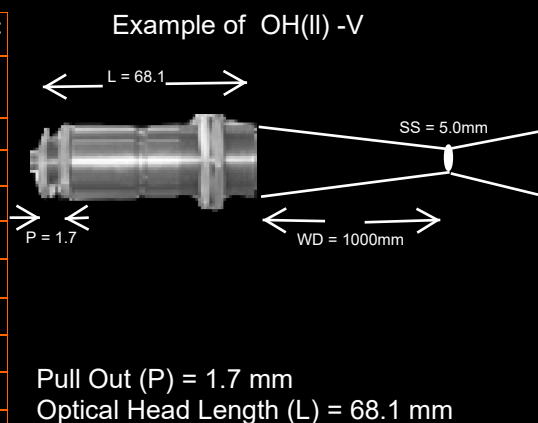

Variable Optics		Optical Head - II - V (Variable)									
Working Distance (WD) (mm)		250	300	400	600	800	1000	1500	2000	2500	
Optical Head Length L (mm)		78.9	75.75	72.8	70.1	68.8	68.1	67.15	66.7	66.4	
Optical Pullout P(mm)		12.5	9.35	6.4	3.7	2.4	1.7	0.75	0.3	0	
Spot	800 - 2500°C/1000°C -	1.3	1.5	2	3	4	5	7.5	10	13	

STEK Infrasoft

STEK "Infrasoft" software is under standard scope of supply. It offers possibilities of connecting three pyrometers simultaneously for parameter setting, view real time graph, offline graph and to evaluate measuring data. Communication between the pyrometer and the software is implemented via a cable connected between the pyrometer and the PC serial port. It comes with record feature, spot size calculator and parameter settings features.


Some of the parameters adjustable via software are

- Emissivity, Response Time,
- Clear Time(Peak Picker),
- Analog Output,
- Sub Range,
- Unit Of Temperature($^{\circ}\text{C}/^{\circ}\text{F}$),
- Communication mode(Comm.mode).


STEK Infrasmart

AST Infrasmart is an android application used to communicate a pyrometer with mobile devices. This application works via bluetooth after pairing with mobile.


APK file for this android application will be provided with device

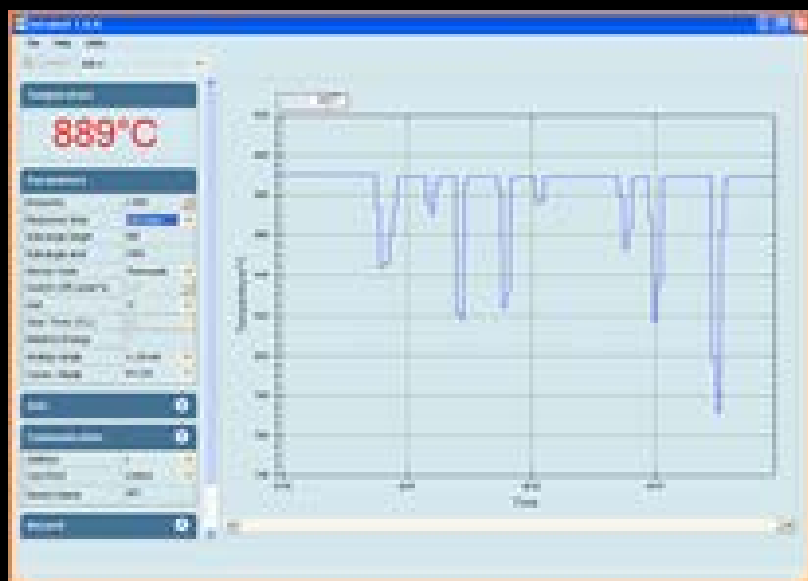



OH1

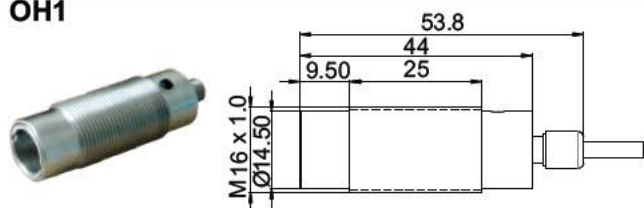

OH2-V

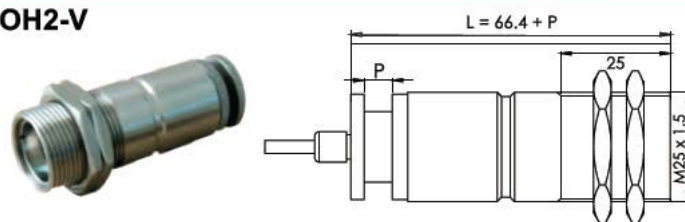

OH2

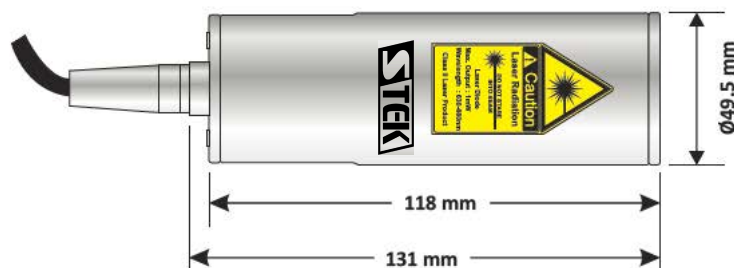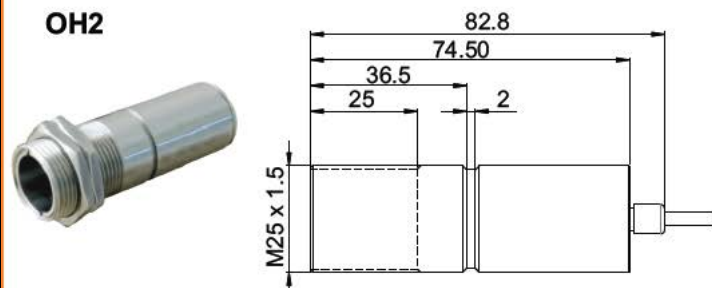

STANDARD SCOPE OF SUPPLY:

- Pyrometer with Laser Pilot Light(PL) for targeting purpose
- 2.5 mtr Mono Fibre optic cable
- Optical head (I) or (II) or (II-V)
- Analog Output 4...20mA, 0 - 20mA, 0-10V
- Bluetooth V2.0
- RS-232/RS-485 serial interface
- 5 mtr long connection cable with connector
- Calibration Certificate, PC Software & Operation manual

OPTIONAL ACCESSORIES:

- Mechanical and Electrical Accessories
- Extra Lengths of Fiber Cable and Connection cable