

A 18

Beside the Press Granulator


- Direct driven staggered rotor
- Special knife design makes adjustment unnecessary
- Easy access for maintenance and cleaning
- Slow rotor speed creates less noise and dust Easily
- Customizable to suit different applications



The curvature of the specially profiled rotor knives ensures a constant cutting radius after re-sharpening thus maintaining the original cutting gap. Awkward knife adjustment is no longer necessary.



Staggered rotor blades create an individual blade cut thus increasing the cutting torque. All of the machines in this series are therefore suitable for grinding more solid materials and thicker walled sprues.

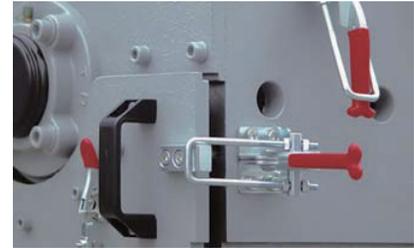

The Virtus Quick Snap System allows the lower front plate section to be easily removed for granulator cleaning. The lower front plate section is held in position by two sturdy lever clamps.

General Description

The slow speed granulators in the A 18 range feature a staggered 180 mm diameter rotor with widths ranging from 180 to 430 mm. The rotor is directly driven by a geared motor. The low rotor speed reduces the noise level of the machine and creates less dust while grinding. The specially designed knives of the A series can be sharpened easily and do not need adjustment afterwards.

The material is fed via a sound absorbing feed hopper that can be tailored to fit various applications and feeding ways. Depending on the requirements, the machines can be fitted with a wide variety of hoppers, and they can be mounted on either low or high level base frames with matching suction bins or bag filling adapters. Quick snap fasteners and hand screws are used to access the machine making cleaning and maintenance fast and easy.

Applications


The A slow speed granulators of the 18 series are mainly used in injection and blow molding processes as beside the press machines to grind runners and sprues. The resulting granules are then immediately reintroduced into the production process. The machines can be used for rejected products in the in-line recycling process as well.

Different hopper and base frame designs make it possible to integrate the machine with most types of injection molding machines and robots.

Virtus
Equipment
The Right Machine for Today's
Recycling Requirements

A 18

Beside the Press Granulator

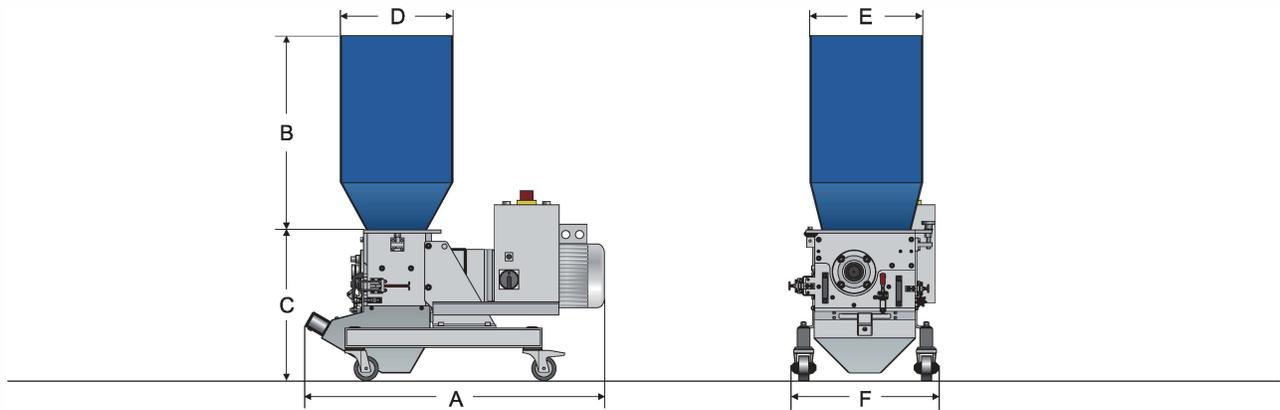

Technical Specifications and Dimensions

Model	180/180	180/300	180/430
Rotor diameter (mm)	180	180	180
Rotor width (mm)	180	300	430
Rotor speed (rpm)	150	150	150
Drive capacity (kW)	3	4	4
Rotor knives (pcs)	18	30	45
Stator blades (rows)	2	2	2
Screen size (mm)	>5	>5	>5
Weight approx (kg)	140	180	250
A (mm)	890	1100	1240
B (mm)	610	610	910
C (mm)	460	460	550
D (mm)	345	345	430
E (mm)	345	345	290
F (mm)	455	455	615

Virtus Equipment

9120 Centerlinks Commerce Dr., Unit 4
Fort Myers, FL 33912

239-219-1800
Sales@Virtus-Equipment.com

virtus-equipment.com

Virtus
Equipment

The Right Machine for Today's
Recycling Requirements