


LED LINEAR FIXTURE

Applications:

Suitable for commercial, retail and institutional applications including gymnasiums, factories and warehouses.

Features

- Available for 4ft and 8ft as per applications.
- Surface mounting or Chain mounting for different applications.
- PIR Sensor and Emergency Battery support.
- Voltage is 120-277V or 347/480V.
- Standard 1-10V dimming available.
- Projected life span of 50,000 hrs.
- Comparable to T8 or T5HO.
- Operating temperature is -40 °C to 40 °C (-40 °F to 104 °F).
- UL/cUL listed and DLC qualified.

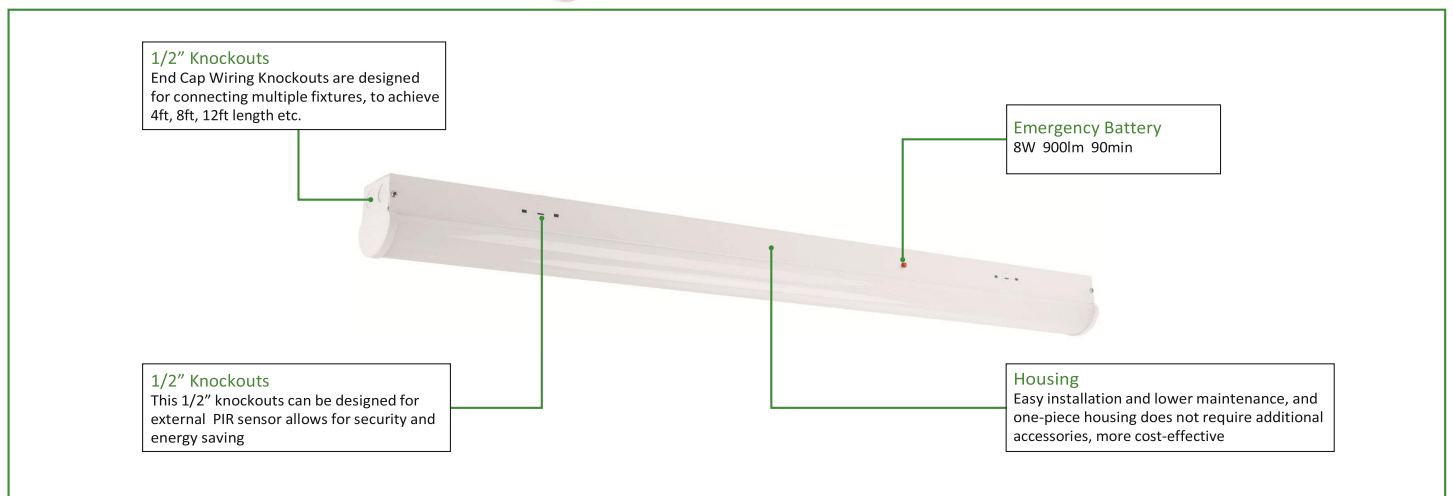

PERFORMANCE & ELECTRICAL DATA	3000K(CRI80)	4000K(CRI80)	5000K(CRI80)
-------------------------------	--------------	--------------	--------------



5 FIVE YEARS WARRANTY

SYSTEM WATTS	SIZE	LENS	VOLTAGE	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
23W	4 FT	Frosted	120-277VAC/347-480V	2900lm	126lm/W	3000lm	130lm/W	3050lm	133lm/W
35W	4 FT	Frosted	120-277VAC/347-480V	4450lm	127lm/W	4650lm	133lm/W	4700lm	134lm/W
45W	4 FT	Frosted	120-277VAC/347-480V	5700lm	127lm/W	6000lm	133lm/W	6050lm	134lm/W
46W	8 FT	Frosted	120-277VAC/347-480V	5750lm	125lm/W	6050lm	132lm/W	6100lm	133lm/W
65W	8 FT	Frosted	120-277VAC/347-480V	8300lm	128lm/W	8700lm	134lm/W	8750lm	135lm/W
80W	8 FT	Frosted	120-277VAC	9900lm	124lm/W	10500lm	131lm/W	10550lm	132lm/W
85W	8 FT	Frosted	347/480VAC	9900lm	116lm/W	10500lm	124lm/W	10550lm	124lm/W
Size	Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)				
4 FT	1	530	23	120	0.19				
			23	208	0.11				
			23	240	0.10				
			23	277	0.08				
		530	23	347	0.07				
			23	480	0.05				
4 FT	1	850	35	120	0.29				
			35	208	0.17				
			35	240	0.15				
			35	277	0.13				
		1020	35	347	0.10				
			35	480	0.07				
4 FT	1	1120	45	120	0.38				
			45	208	0.22				
			45	240	0.19				
			45	277	0.16				
		1200	45	347	0.13				
			45	480	0.09				
8 FT	1	1120	46	120	0.38				

			46	208	0.22
			46	240	0.19
			46	277	0.17
		1200	46	347	0.13
			46	480	0.10
8 FT	1	1500	65	120	0.54
			65	208	0.31
			65	240	0.27
			65	277	0.23
		1600	65	347	0.19
			65	480	0.14
8 FT	1	2100	80	120	0.67
			80	208	0.38
			80	240	0.33
			80	277	0.29
			85	347	0.24
			85	480	0.18




5 FIVE YEARS WARRANTY

DIMENSION

unit: inch/mm


Weight
35W: 5.75lb
45W: 5.88lb

4'

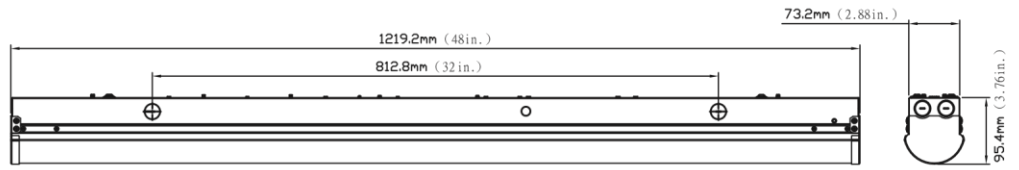


Weight
65W: 11.28lb
80W: 11.42lb

8'

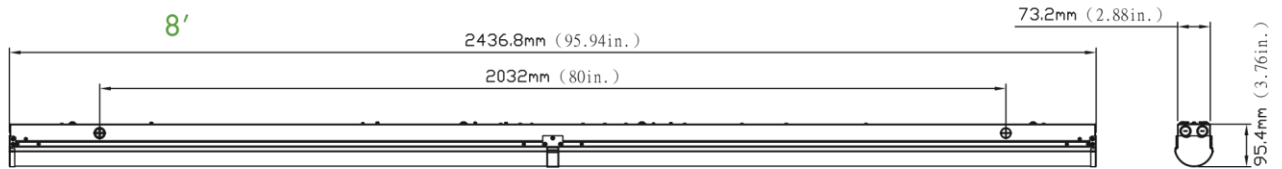

PHOTOMETRICS

General

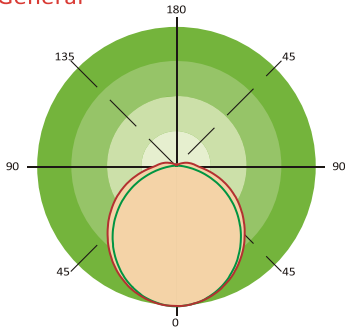

ENERGY SAVING REPLACEMENT

Size	Power	Replacing
4ft	30	T8x2
4ft	45	T5HOx2
8ft	60	T8HOx2
8ft	80	T5HOx4/T8x4

ORDERING GUIDE

Example: FDK-LF-F1-4-23W-27V

Fixture Type	Length Wattage	Voltage	CCT	Sensor (Option)	Backup Battery (Option)
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
FDK-LF-F1 Fudakin F1 Generation Linear Fixture	4-23W 4FT 23W 4-35W 4FT 35W 4-45W 4FT 45W 8-46W 8FT 46W 8-65W 8FT 65W 8-80W 8FT 80W 8-85W 8FT 85W	27V 120-277V 48V 347- 480V 347/480V	40K 4000K 50K 5000K	Blank Without Sensor M With Sensor	B Emergency Battery Blank Without Emergency Battery

Note: The wattage is 80W when the voltage is 120-277V, while the voltage is 347/480V, the wattage is 85W.



5 FIVE YEARS WARRANTY