

6" RECESSED HOUSING

Remodel

Housing

- Die-formed aluminum for maximum heat dissipation and rust protection
- Housing adjusts to 1/2" to 1 3/8" ceiling thickness. Trims are held in place with high tension clips
- Housing is compatible with IC and Non-IC applications.



Connection

E26 Standard Edison Base Socket.

Junction Box

UL listed for through branch wiring.

1/2" and 3/4" romex wiring knockouts and four romex knockouts with integral strain clamps, all knockouts have true pry-out slots.

J-Box is designed for straight through conduit runs.

Fixture fully assembled including pre-wired ballast for easy installation. Removable access plates for easy installation.



Thermal Protection

Standard thermal protection device guards against improper installation and misuse of insulation material.

Air-Shut

Provided with gasket to prevent airflow from heated or airconditioned spaces. Meets or exceeds all national air flow requirements.

Listing & Warranty

UL listed to US and Canada standards for wet locations. 5-year limited warranty.




340 Marshall Avenue #103, Aurora IL 60506 | Telephone 630.486.1070 | Fax 630.486.1034 Email: info@fudakinlighting.com | www.fudakinlighting.com


6" RECESSED HOUSING


Remodel

Product Ordering code

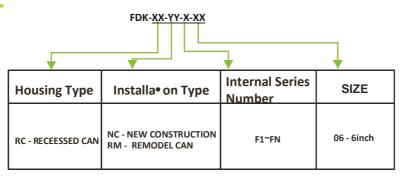

Outline Drawing & Overall Size





TRIMS





FDK-ST-F1-06-WH

Important notes:











340 Marshall Avenue #103, Aurora IL 60506 | Telephone 630.486.1070 | Fax 630.486.1034 Email: info@fudakinlighting.com | www.fudakinlighting.com