# FUD/KIN

## **4" RECESSED HOUSING**

# Housing

- Die-formed aluminum for maximum heat dissipation and rust protection
- Housing adjusts to 1/2" to 1 3/8" ceiling thickness. Trims are held in place with high tension clips
- Housing is compatible with IC and Non-IC applications.



- Connection
- Polarity-specific EZ-connect system engineered to match with EZ-connect trims.

# Thermal Protector

• Standard thermal protection device guards against improper installation and misuse of insulation material

## Junction Box

- UL listed for through branch wiring
- 1/2" and 3/4" romex wiring knockouts and four romex knockouts with integral strain clamps, all knockouts have true pry-out slots
- J-Box is designed for straight through conduit runs
- Fixture fully assembled including pre-wired ballast for easy installation
- Removable access plates for easy installation

## Air-Shut

• Provided with gasket to prevent airflow from heated or air-conditioned spaces. Meets or exceeds all national air flow requirements.

# Listing & Warranty

• UL listed to US and Canada standards for wet locations








## LED RECESSED HOUSING

### New Construction Quick Connect


#### Product Ordering code




340 Marshall Avenue #103, Aurora IL 60506 | Telephone 630.486.1070 | Fax 630.486.1034 Email: info@fudakinlighting.com | www.fudakinlighting.com

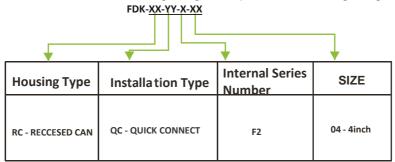

#### Outline Drawing & Overall Size





#### TRIMS



FDK-BT-F1-04-WH White Baffle 50W Max. PAR20R20 O. D. 5"



Hblogwill 1 Wet Welation Listed Satin Glass Shower Trim 30W Max. RAR20/R20 O. D. 5"



FDK-GT-F1-04-WH White Gimbal 50W Max. RAR20 O. D. 5"



FDK-SGT-F1-04-WH 4" Square Gimbal Trim White

PRR20/R20



340 Marshall Avenue #103, Aurora IL 60506 | Telephone 630.486.1070 | Fax 630.486.1034 Email: info@fudakinlighting.com | www.fudakinlighting.com