



## Applications:

Suitable for building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

## Features

- 112 lm/W with zero uplight while consumes 25W.
- Round appearance for good decorative effect.
- Dark bronze polyester powder-coat finish in 3.5ft height.
- 360 degrees surround illumination with 80 CRI.
- 1-10V dimming and projected over 50,000 hrs life span.
- Operating temperature is -40°C to 40°C (-40°F to 113°F).
- Optional emergency function for emergency needs.
- Robust ground cage pre-buried installation.



## PERFORMANCE DATA


		4000K(80CRI)		5000K(80CRI)	
SYSTEM WATTS	VOLTAGE	LUMENS	LPW	LUMENS	LPW
25W	120-277V	2800lm	112 lm/W	2800lm	112 lm/W

## ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	670	25	120	0.21
		25	208	0.12
		25	240	0.10
		25	277	0.09

## DIMENSION

unit: inch/mm

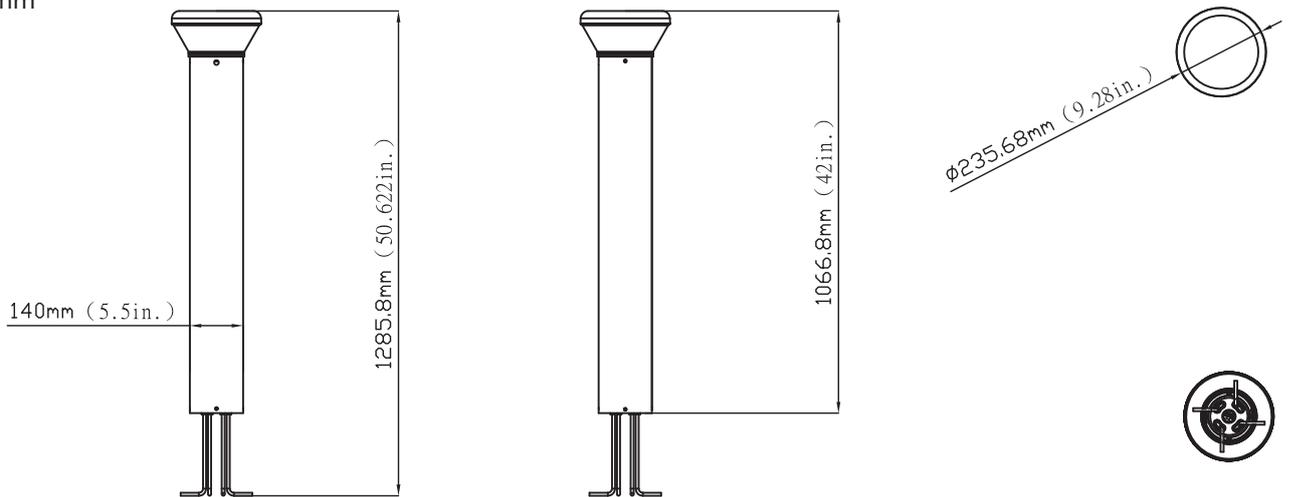

## ORDERING GUIDE

Example: FDK-BL-F1-25W-27V-50KD

Fixture Type	Wattage	Voltage	CCT	Finish	Backup Battery (Option)	Internal Code
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>FDK-BL-F1</b> Fudakin Bollard Light F1 Series	<b>25</b> 25W	<b>27V</b> 120-277V	<b>40K</b> 4000K <b>50K</b> 5000K	<b>D</b> Dark Bronze <b>B</b> Black <b>W</b> White <b>SG</b> Silver Grey	<b>B</b> With Emergency Battery <b>Blank</b> Without Emergency Battery	<b>Blank</b> <b>Alphanumeric</b>