

DOWN LIGHTS

Square Downlight External Driver



Ordering Information

Model No.	Item name	Lumens ² (lm)	Watts (w)	CCT ¹ (k)	Efficacy (lm/w)	CRI	Lifetime ³	Beam	Base type Dimmable (h) Angle	Voltage (v)	Certification	
FDK-SDL-EX-F1-12-04-13W-XXK-D	Slim Downlight	750	13	2700K	58	90	35000	/	/	YES	120	Pending
	External Driver 13W			3000K	69							
FDK-SDL-EX-F1-12-06-16W-XXK-D	Slim Downlight	1100	16	3500K	69	90	35000	/	/	YES	120	Pending
	External Driver 16W			4000K	75							
FDK-SDL-EX-F1-12-08-20W-XXK-D	Slim Downlight	1500	20	5000K								
	External Driver 20W											

1. CCT Range complies to ANSI C78.377-2008.

2. Rated life is based on 70% lumen maintenance, and engineering testing and probability analysis.

Diameter

Dimensions


Model

MOL

FDK-SDL-EX-F1-12-04-13W-XXK-D 0.93"
FDK-SDL-EX-F1-12-08-20W-XXK-D

4.92" FDK-SDL-EX-F1-12-06-16W-XXK-D
0.93" 8.86"

0.93" 6.69"

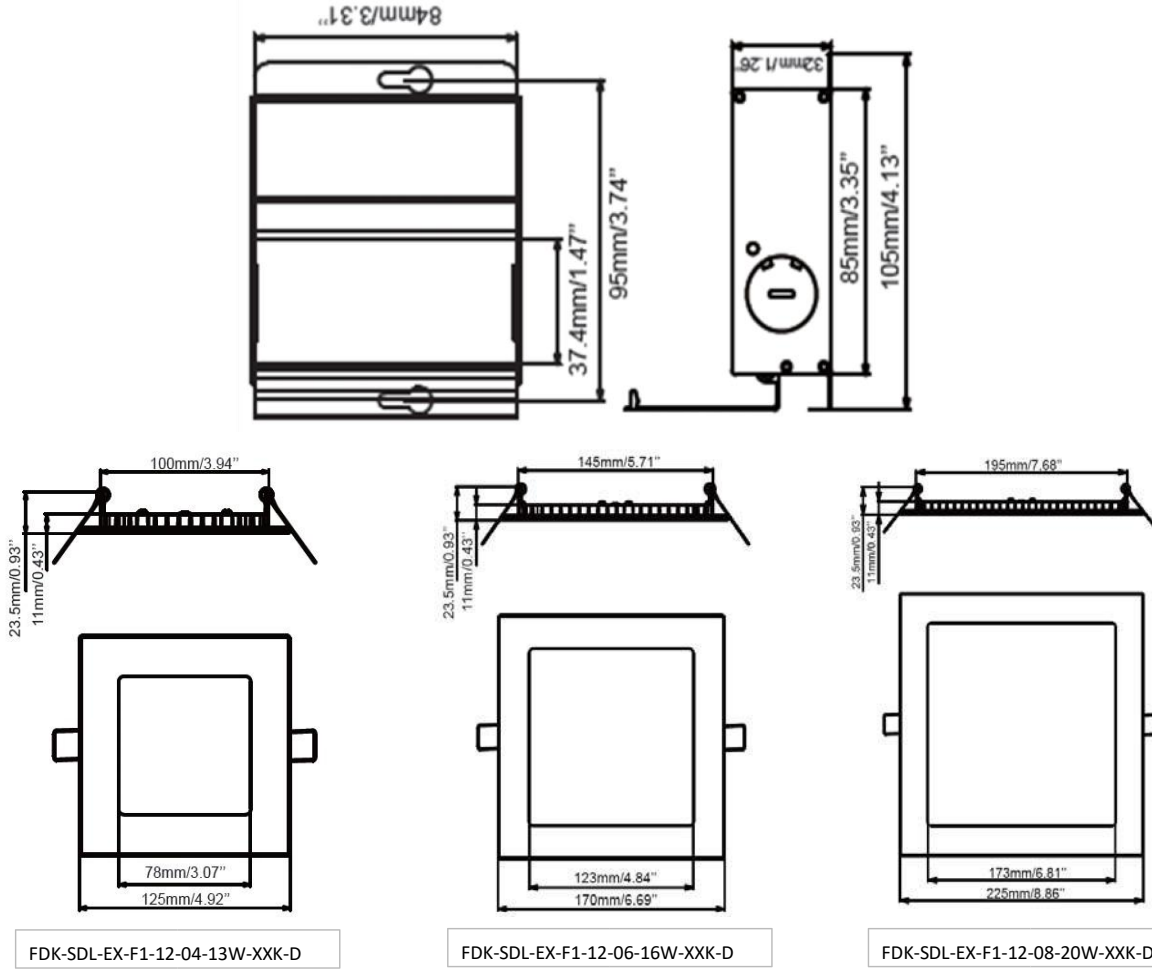

5 FIVE YEARS WARRANTY