


T8 LED TUBE

Dimension And Picture:

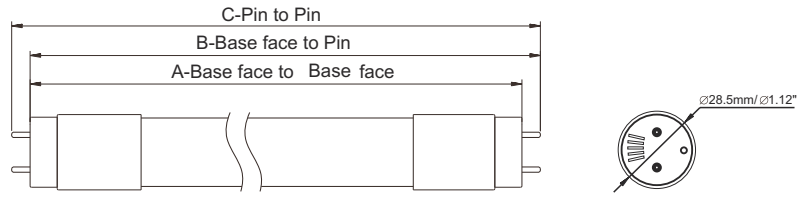

Model	A	B	C
4FT	1198.4mm/47.18	1205.4mm/47.46	1212.6mm/47.74
3FT	893.6mm/35.18	900.7mm/35.46	907.8mm/35.74
2FT	588.8mm/23.18	595.9mm/23.46	603mm/23.74

Specifications:

Model.	CCT	Length	Input Voltgase	Lamp Input Power	Luminous Flux (Nature White)	Working Temperature	Rated LED Life	CRI
FDK-LT8C-4-153FA	3000K	4ft	AC100~277V 50/60Hz	15W	>1800 lm	-25°C-- 45°C	>50000Hrs	≥80
FDK-LT8C-4-154FA	4000K	4ft	AC100~277V 50/60Hz	15W	>1800 lm	-25°C-- 45°C	>50000Hrs	≥80
FDK-LT8C-4-155FA	5000K	4ft	AC100~277V 50/60Hz	15W	>1900 lm	-25°C-- 45°C	>50000Hrs	≥80


Product Features:

Application


- Office Building, Factory, Undergroud Parking Lot, Supermarket, School, Home lighting etc

Warning


Ballast Compatibility List	
MANUFACTURER	BALLAST MODEL
Philips Advance	ICN-2P32-N
Osram Sylvania	QHE2x32T8/UNV ISN-SC
GE UltraMax	GE232MAX-G-N-DIYB
GE UltraMax	GE432MAX-G-N-DIYB
GE UltraMax	GEM220TS120/2-DIY

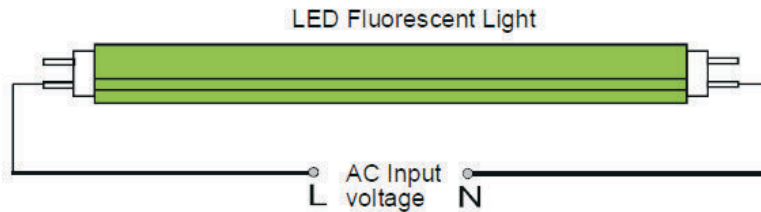

A: Voltage input dirtctly (NO)

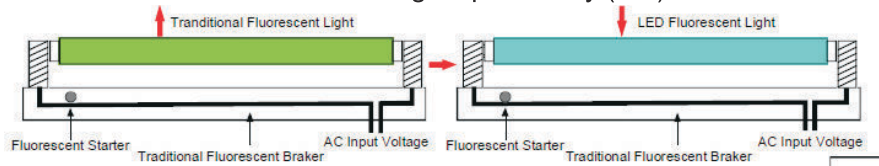

B: Replace Inductive ballast Tube (NO)

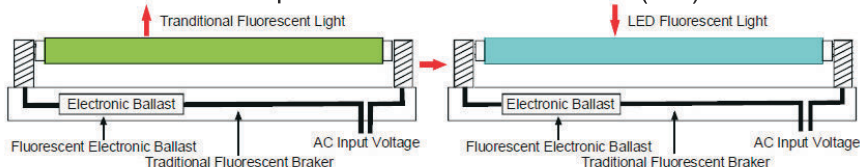


C: Replace electronic ballast Tube (OK)

***The LED T8 lamps and the compatible ballasts shown on the chart, have been tested internally by the lamp manufacturer only and not the ballast manufacturer. We are continually testing our LED lamps on various popular ballasts. We will continue to update this list as additional models are tested.


If the ballast does not appear on this list, it does not necessarily mean the model is not compatible with the LED T8 lamps. It may just be that the model has not been tested yet. Please contact our about ballasts that are not shown on this list.




5 FIVE YEARS WARRANTY

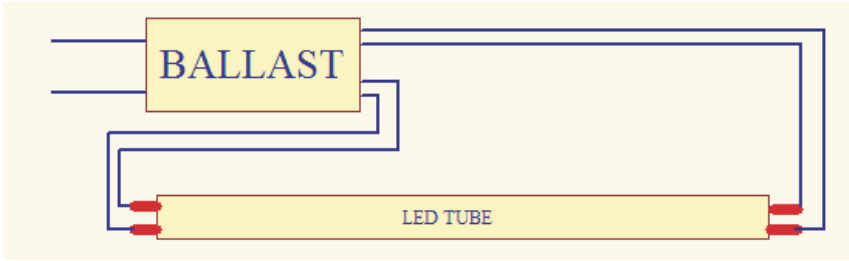


b. One electronic ballast two LED tube

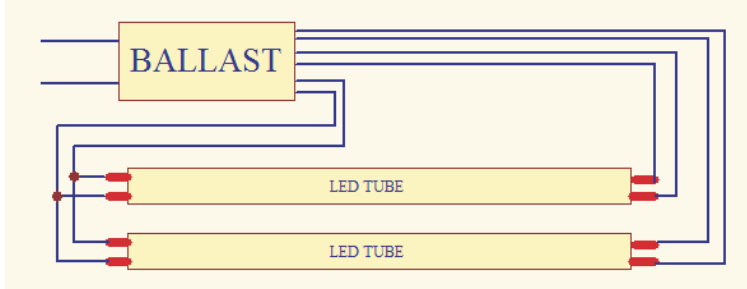

C. One electronic ballast three LED tube

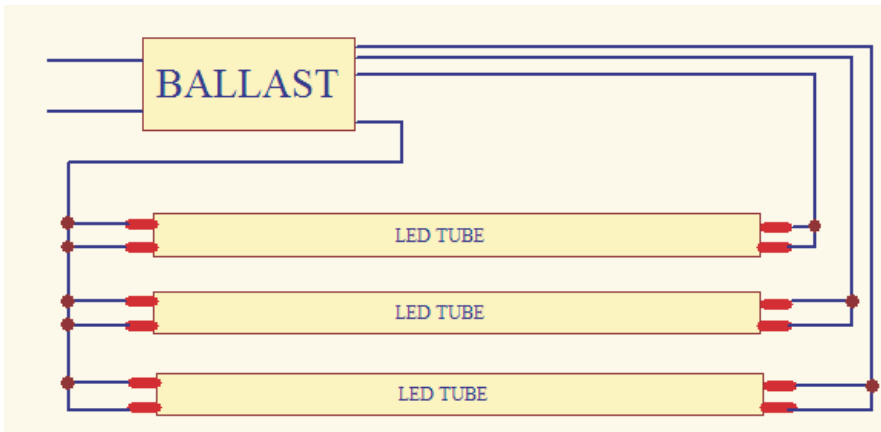

D. One electronic ballast fore LED tube

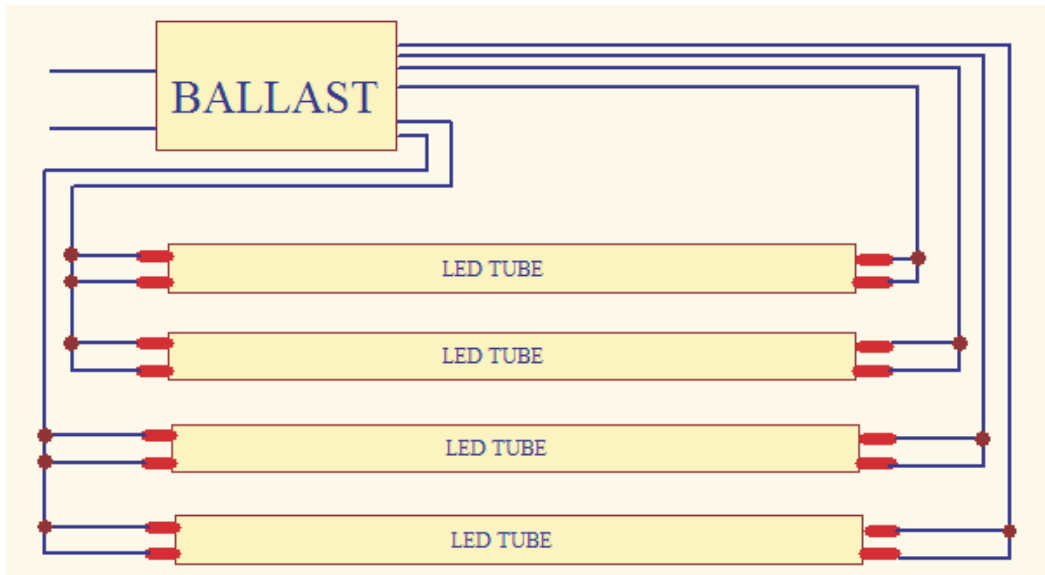

5 FIVE YEARS WARRANTY