


RF Balun Transformer

AWA1038-H004109




50Ω 1:3 CT Flux Coupled Transformer 1-300 MHz


Outline Drawing(mm)

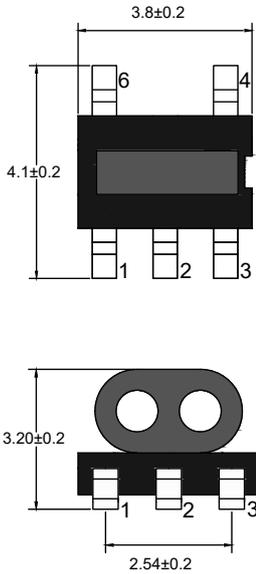

Electrical structure

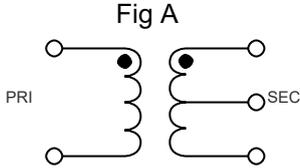

Recommended layout(mm)

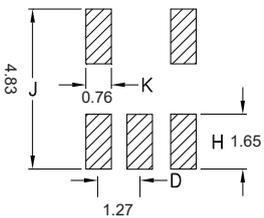

Pin Connections

Input	6
Output 1	1
Output 2	3
Ground	2,4

Features

- Operating temperature range: -40°C to +85°C
- Storage temperature range: -55°C to +100°C
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Input Power: 500mW Max
- DC Current: 500mA Max




Applications


- For Motorola Walkie-talkie.
- For Car Streaming Media Rearview Mirror.
- For Broadband and Wireless Communications.
- For Wireless Microphone & Marine Communications.
- For Ideally Suited LTE, Cellular, UMTS, WiFi, WiMAX.
- For Differential Modulator/demodulator and Active Mixers.

Electrical Specifications: TA=25°C, 0dBm, Z0=50Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss (Pin6-1)	1-300MHz	dB	—	0.8	1.2
Main line Loss (Pin6-3)	1-300MHz	dB	—	0.5	0.9
Amplitude Balance	1-300MHz	dB	0.0	0.2	0.6
Phase Balance	1-300MHz	°	0.0	0.5	5.0
Input Return Loss(Pin6)	1-300MHz	dB	14.0	17.0	—

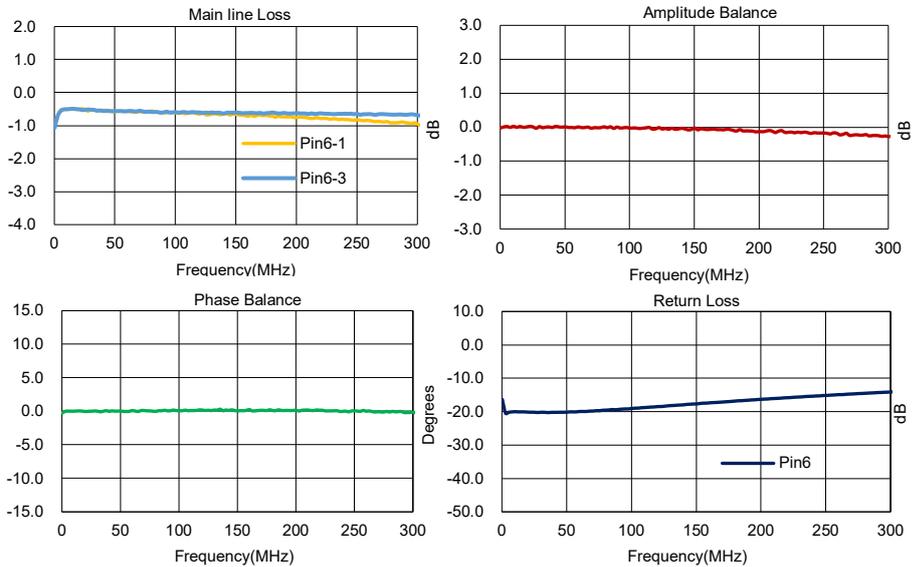

Carrier Tape Orientation

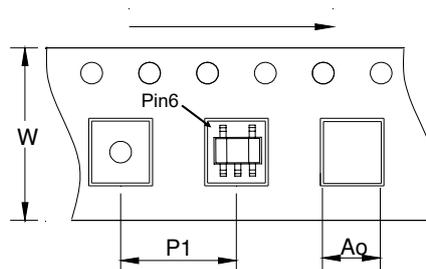

Tape & Reel Information

Parameter	Units	Value
Qty per reel	PCS	2000
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	8.00
Ao	mm	4.50
Bo	mm	4.50
Ko	mm	3.50

