


RF Balun Transformer

AWH2010-D018720




75Ω 1:1 Transmission Line Transformer 50-1218 MHz

Outline Drawing(mm)

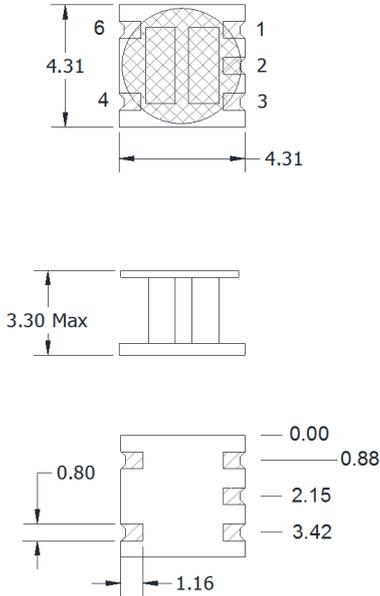


Electrical structure

Fig I

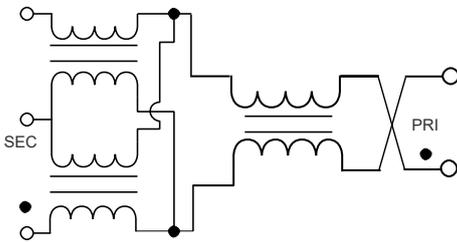

Recommended layout(mm)

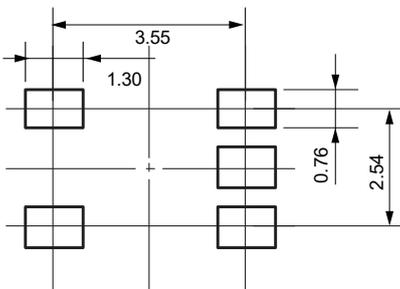


Pin Connections

Input	6
Output 1	1
Output 2	3
Ground	2,4

Features

- Input Power: 5W Max
- DC Current: 1000mA Max
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Operating temperature range:-40 C to+125 C
- Storage temperature range: -55 C to +125 C




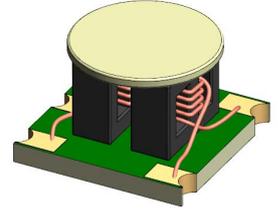


Applications


- For Docsis 3.0 & 3.1 Cable Modem.
- For Wideband Push-pull Amplifiers.
- For CATV Amplifiers Module & Set top box.
- For CATV Optical Receivers and Amplifiers.
- For VHF/UHF Transmitters and Push-pull Amplifiers.

Electrical Specifications:TA=25°C, 0dBm, Z0=75Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss (Pin6-1)	50-1218MHz	dB	—	1.8	2.0
Main line Loss (Pin6-3)	50-1218MHz	dB	—	1.8	2.0
Amplitude Balance	50-1218MHz	dB	0.0	0.5	0.8
Phase Balance	50-1218MHz	°	0.0	8.0	10.0
Input Return Loss(pin6)	50-1218MHz	dB	15.0	20.0	—

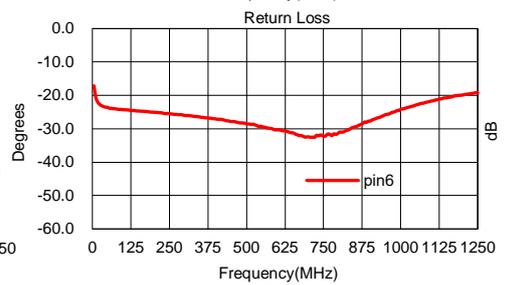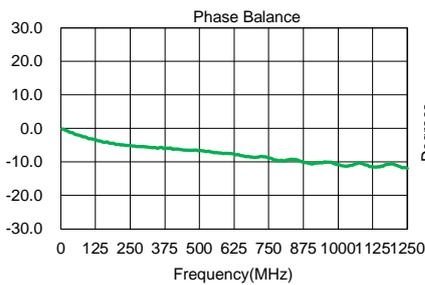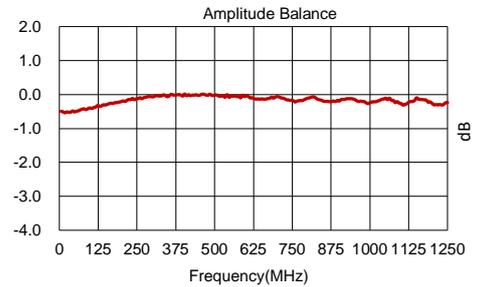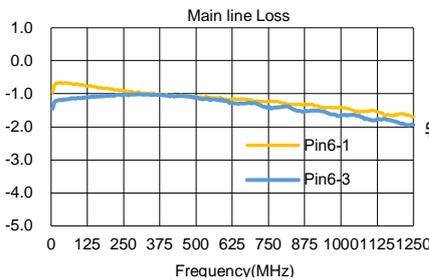

Carrier Tape Orientation

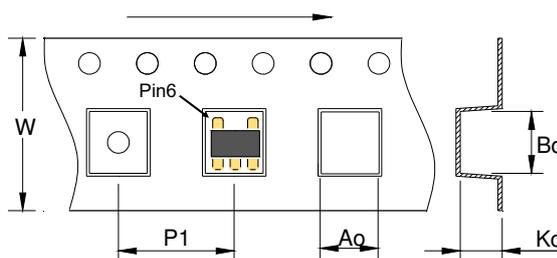

Tape & Reel Information

Parameter	Units	Value
Qty per reel	PCS	2000
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	8.00
Ao	mm	4.50
Bo	mm	4.50
Ko	mm	3.40



Advanced Wire Coil Technology LLC

Web: www.awcoil.com E-mail: Sales@awcoil.com Phone: (321)-321-6168 Florida,USA