



RF Directional Coupler

AWJ1201-D001135




75Ω 12dB Directional Coupler 5-1800MHz


Outline Drawing(mm)



Electrical structure



Recommended layout(mm)



Pin Connections

Input	1
Coupling	3
Output	6
Ground	2
External 75 Ω	4
NC	5

Features

- Input Power:0.25W Max
- DC Current: 30mA Max
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Operating temperature range:-40 C to +85 C
- Storage temperature range: -55 C to +100 C







Applications


- For Dccsis 3.0&4.0Cable Modem.
- For Wideband Push-pull Amplifiers.
- For CATV Amplifiers Module & Set top box.
- For CATV Optical Receivers and Amplifiers.
- For VHF/UHF Transmitters and Push-pull Amplifiers.

Electrical Specifications:TA=25°C, 0dBm, Z0=75Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Coupling(Pin1-3)	5-1800MHz	dB	11.0	11.8	13.0
Main line Loss(Pin1-6)	5-1800MHz	dB	—	0.70	2.0
Input Return Loss(Pin1)	5-1800MHz	dB	18.0	25.0	—
Output Return Loss(Pin6)	5-1800MHz	dB	17.0	25.0	—
Coupling Return Loss(Pin3)	5-1800MHz	dB	17.0	25.0	—
Isolation(Pin1-4)	5-1800MHz	dB	25.0	30.0	—

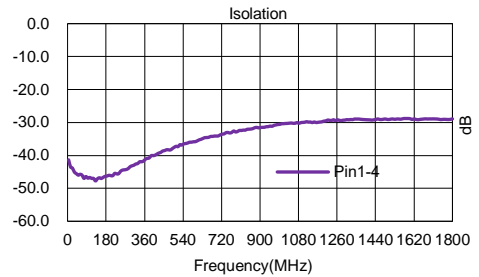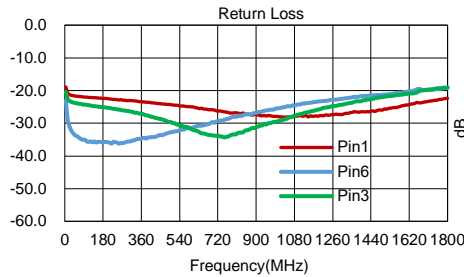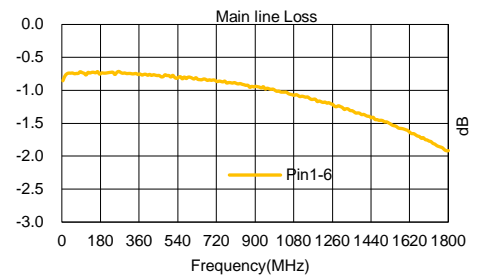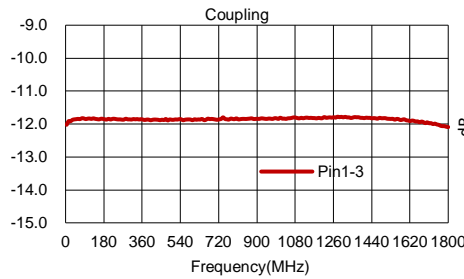

Carrier Tape Orientation

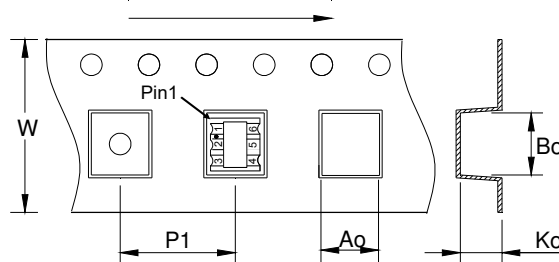

Tape & Reel Information

Parameter	Units	Value
Qty per reel	PCS	1500
Reel Size	mm	330
Tape Width	mm	16.00
Pitch	mm	12.00
Ao	mm	7.20
Bo	mm	8.10
Ko	mm	3.80



Advanced Wire Coil Technology LLC

Web: www.awcoil.com E-mail: Sales@awcoil.com Phone: (321)-321-6168 Florida,USA