

RF Directional Coupler


AWJ1401-C172082




75Ω 14dB Directional Coupler

5-3250MHz


Outline Drawing(mm)

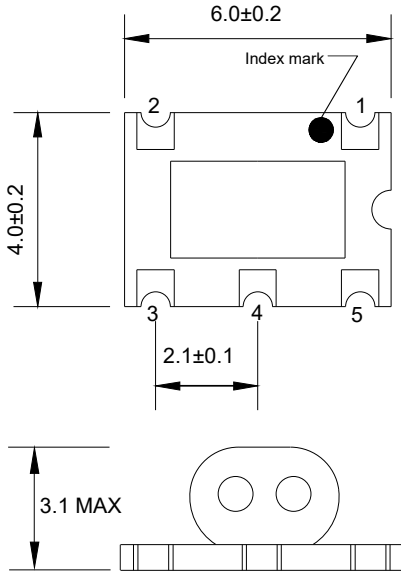

Electrical structure



Recommended layout(mm)

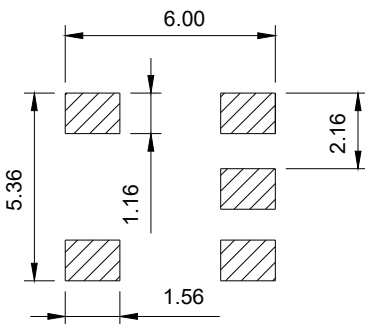

Pin Connections

Input	3
Coupling	5
Output	2
Ground	4
External 75 Ω	1

Features

- Input Power:0.5W Max
- DC Current:500mA Max
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Operating temperature range: -40 to +85 °C
- Storage temperature range: -55 °C to +100 °C






Applications


- For Docsis 3.0&4.0Cable Modem.
- For Wideband Push-pull Amplifiers.
- For CATV Amplifiers Module & Set top box.
- For CATV Optical Receivers and Amplifiers.
- For VHF/UHF Transmitters and Push-pull Amplifiers.

Electrical Specifications:TA=25 °C, 0dBm, Z0=75Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Coupling(Pin3-4)	5-3250MHz	dB	13.0	14.5	15.5
Main line Loss(Pin3-2)	5-3250MHz	dB	—	2.0	3.6
Input Return Loss(Pin3)	5-3250MHz	dB	10.0	17.0	—
Coupling Return Loss(Pin5)	5-3250MHz	dB	10.0	14.0	—
Output Return Loss(Pin2)	5-3250MHz	dB	11.0	15.0	—
Isolation(Pin3-1)	5-3250MHz	dB	16.0	22.0	—

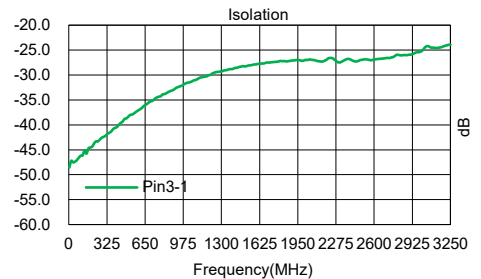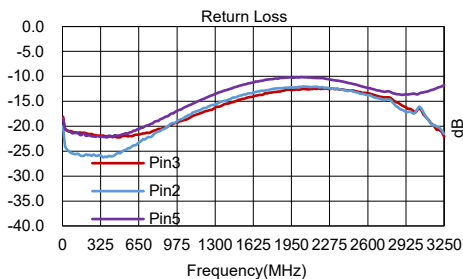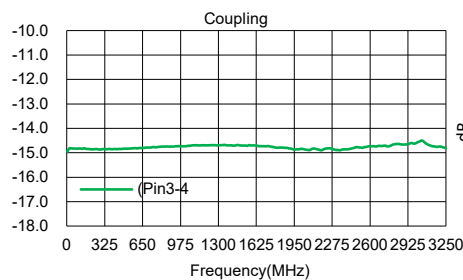

Carrier Tape Orientation

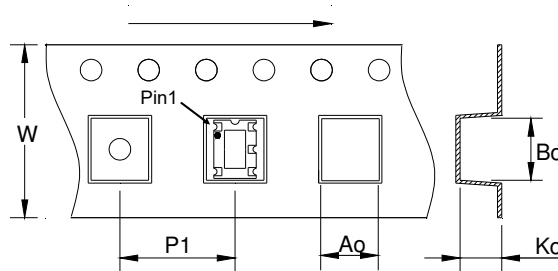

Tape & Reel Information

Parameter	Units	Value
Qty per reel	PCS	2000
Reel Size	mm	330
Tape Width	mm	16.00
Pitch	mm	8.00
Ao	mm	4.60
Bo	mm	6.60
Ko	mm	3.20



Advanced Wire Coil Technology LLC

Web: www.awcoil.com E-mail: Sales@awcoil.com Phone: (321)-321-6168 Florida,USA