


# High Inductance Molded Inductor AWTC1510A

## Product features


- Soft saturation. Low EMI.
- High current, low DCR, high efficiency.
- Current range from 8.6A to 43A
- Inductance range from 4.7μH to 33μH.
- Very low acoustic noise and very low leakage flux noise.
- High reliability.
- 100% Lead (Pb)-Free and RoHS compliant.
- Operating temperature -55~+125°C (Including self - temperature rise)

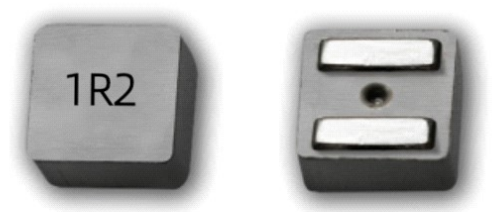

## Applications

- Note PC power system, incl. IMVP-6
- DC/DC converter, Electric pumps, motor control and auxiliaries.
- LED lighting/Battery management systems/Powertrain control module...

## Dimensions (Unit: mm)

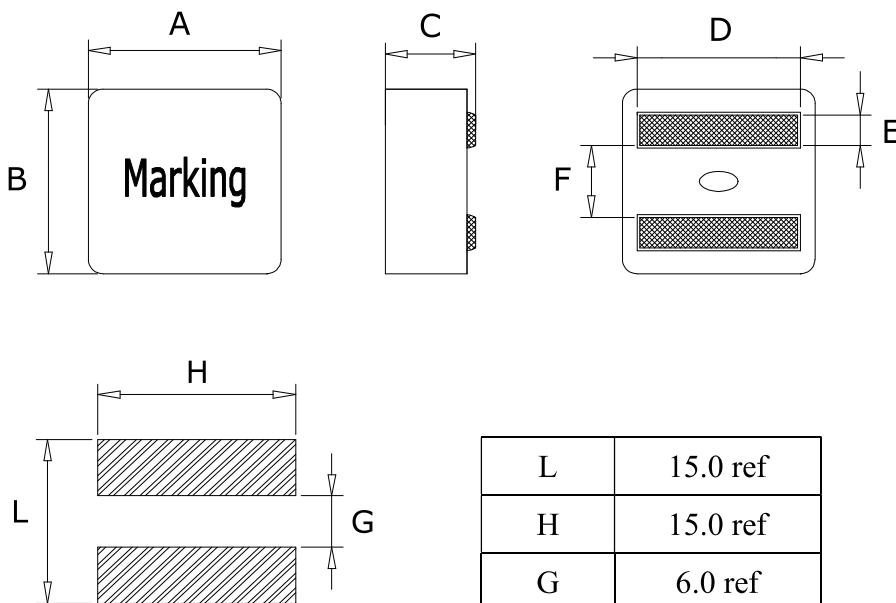

Code	Dimensions(mm)
A	16.5±0.3
B	15.5±0.3
C	9.7±0.3
D	13.2±0.5
E	3.2±0.3
F	7.0±0.3

Recommend Land Pattern

Unit: mm


## Specifications

Part Number	L0 ( $\mu\text{H}$ ) $\pm 20\%$	DCR (m $\Omega$ ) MAX	Isat (A)		Irms (A)Typ	
			TYP	MAX	20°C rise	40°C rise
AWTC1510A-4R7M	4.7	3.8	39	43	22.0	30.0
AWTC1510A-5R6M	5.6	4.2	34	38	21.0	28.0
AWTC1510A-6R8M	6.8	4.6	31.0	36.0	20.0	26.0
AWTC1510A-8R2M	8.2	7.2	28.0	32.0	19.0	25.0
AWTC1510A-100M	10	8.6	26	29	18	24
AWTC1510A-150M	15	11.5	18	20	14	18
AWTC1510A-220M	22	15.8	16	18	10.5	14.2
AWTC1510A-330M	33	20	14	16.7	8.6	12.3

### Notes:

1. Test frequency: L : 100KHz /0.1V;
2. All test in 25 °C temperature.
3. Heating Rating Current (Irms) will cause the coil temperature rise of 40°C approximately ( $\Delta t$ );
4. Saturation Current (Isat ) will cause L0 to drop 30% approximately.
5. The part temperature (ambient + temp rise) should not exceed 125°C under the worst-case operating condition. Circuit design, component, PCB trace size and thickness airflow and other cooling provisions all could affect the part temperature. Part temperature should be verified in the end application.
6. Special inquiries besides the above commonly used types can be met on your requirement.

## Structure and Components

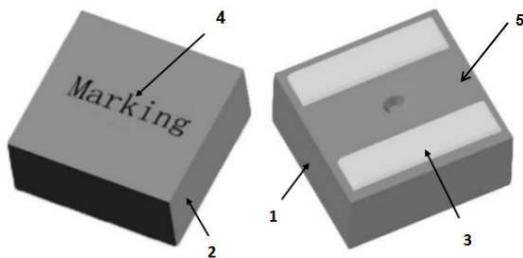

NO	Components	Material
1	CORE	Alloy Powder
2	WIRE	Polyester Wire or equivalent.
3	Clip	100% Pb free solder
4	Ink	Halogen-free ketone
5	paint	Epoxy resin

## Recommended Soldering Technologies

### (1) Re-flowing Profile

Preheat condition: 150 ~ 200°C/60~120sec.


Allowed time above 217°C: 60~90sec.

Peak temp: 260°C

Max time at Peak temp: 10 sec.

Solder paste: Sn/3.0Ag/0.5Cu

Allowed Reflow time: 2x max

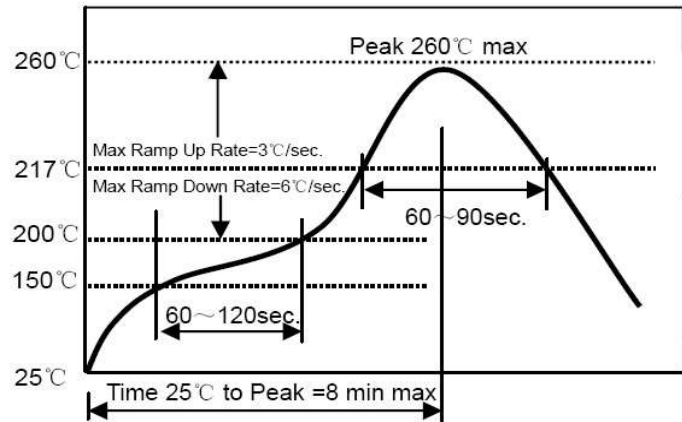

### (2) Iron Soldering Profile

Iron soldering power: Max. 30W


Pre-heating: 150°C/60sec.

Soldering Tip temperature: 350°C Max.

Soldering time: 3sec. Max.


Solder paste: Sn/3.0Ag/0.5Cu

Max.1 times for iron soldering

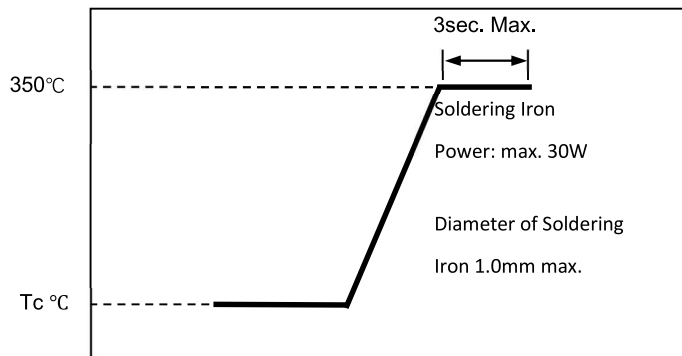


## Packaging Information

(1) Tape Packaging Dimensions (Unit: mm)



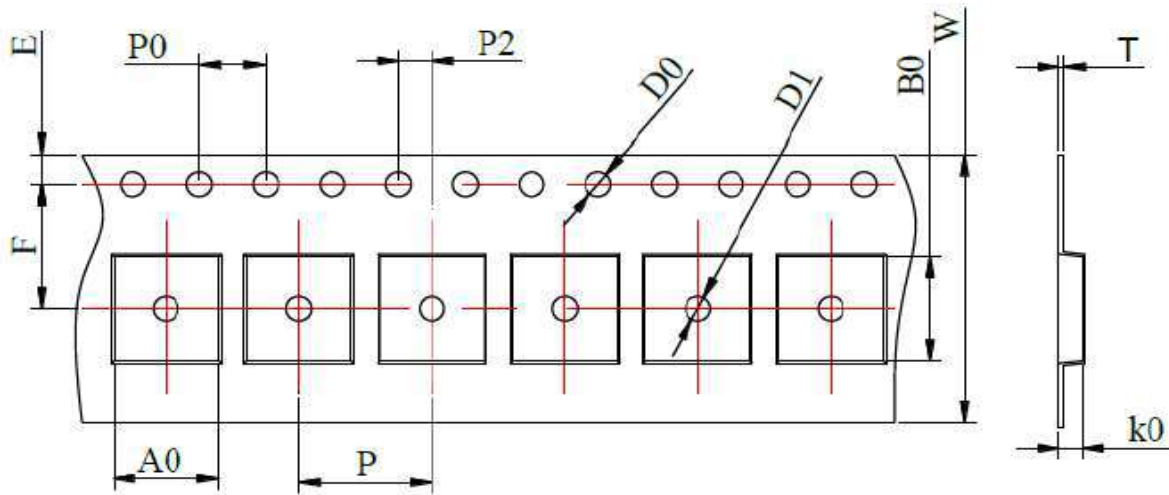


Tape dimensions (mm)											
W	P	P0	P2	D0	D1	T	A0	B0	K0	E	F
32	24	4	2	1.5	1.5	0.5	17	16	10.5	1.75	14.2
±0.3	±0.1	±0.1	±0.1	±0.1	±0.1	±0.05	±0.1	±0.1	±0.1	±0.1	±0.1

## Taping Drawings (UNIT:mm)

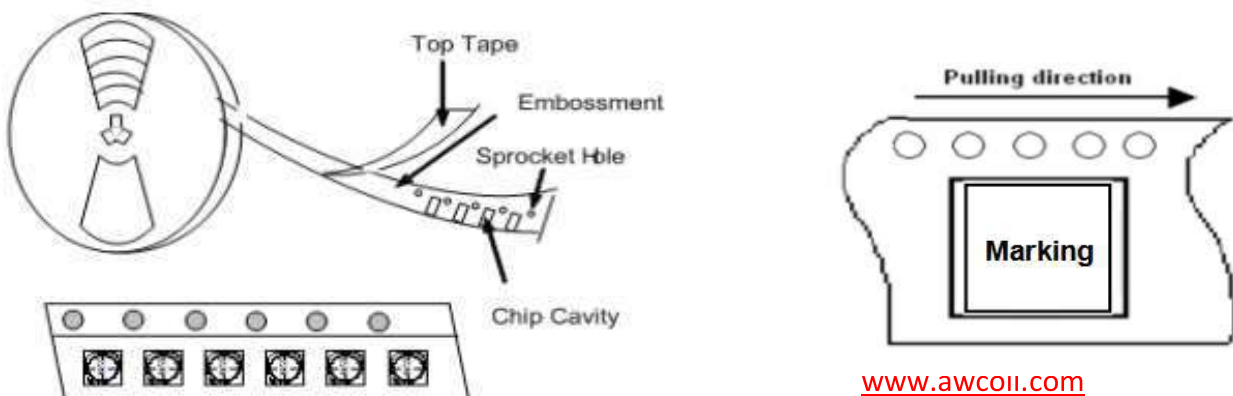

(2) Reel Dimensions (Unit: mm)

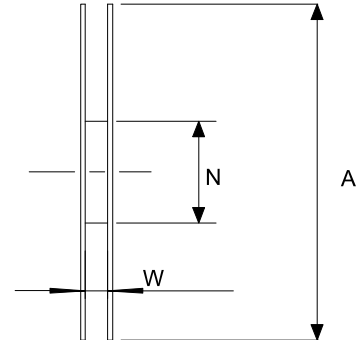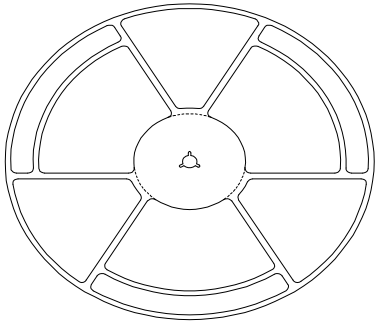

A	W	N	B	C
330±2.0	32±0.5	97±0.5	2.3±0.5	13.2±0.2


(3) Packaging Quantity

Standard Quantity		
Reel	Inner box	Carton box
150 pcs / reel	2Reel / box (300 pcs)	3 Middle boxes, (900 pcs)

(4) Peel force of top cover tape

The peel speed shall be about 300mm/minute

The peel force of top cover tape shall be between 0.1 to 1.3 N

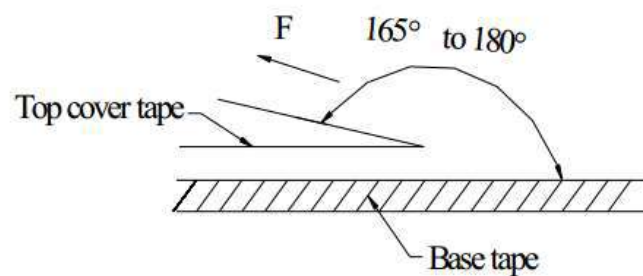


(5) Reel Label

Label on the reel


- Customer's part Number
- Lot Number
- Quantity
- date code

Shipping Label

- Customer's part Number
- Manufacturer's part Number
- Quantity
- Date code

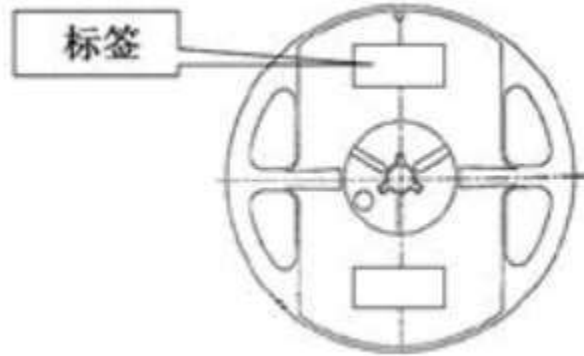


(6) Inner Box

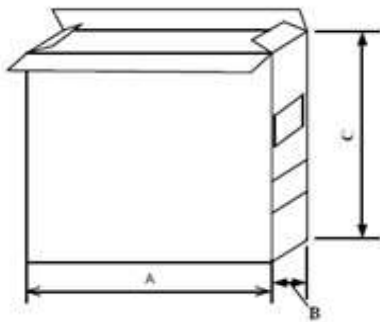

Packaging type	A (mm)	B (mm)	C (mm)
Inner box	335	70	340

(7) Carton

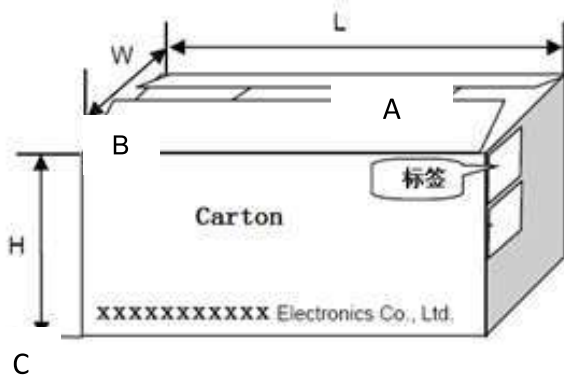

Packaging type	A	B	C
type	360	360	360