

Tulip Flare Deflector


Product Specification Sheet



Description

The tulip flare deflector is designed to enable the pull in of the umbilical/riser. It is to be deployed/recovered through 3-point lift using the central padeyes and bolted to the I-Tube, respective of the expected pull in angle. Enables the umbilical/riser to be hung off without obstruction.

Dimensions can be altered to suit I-Tube.

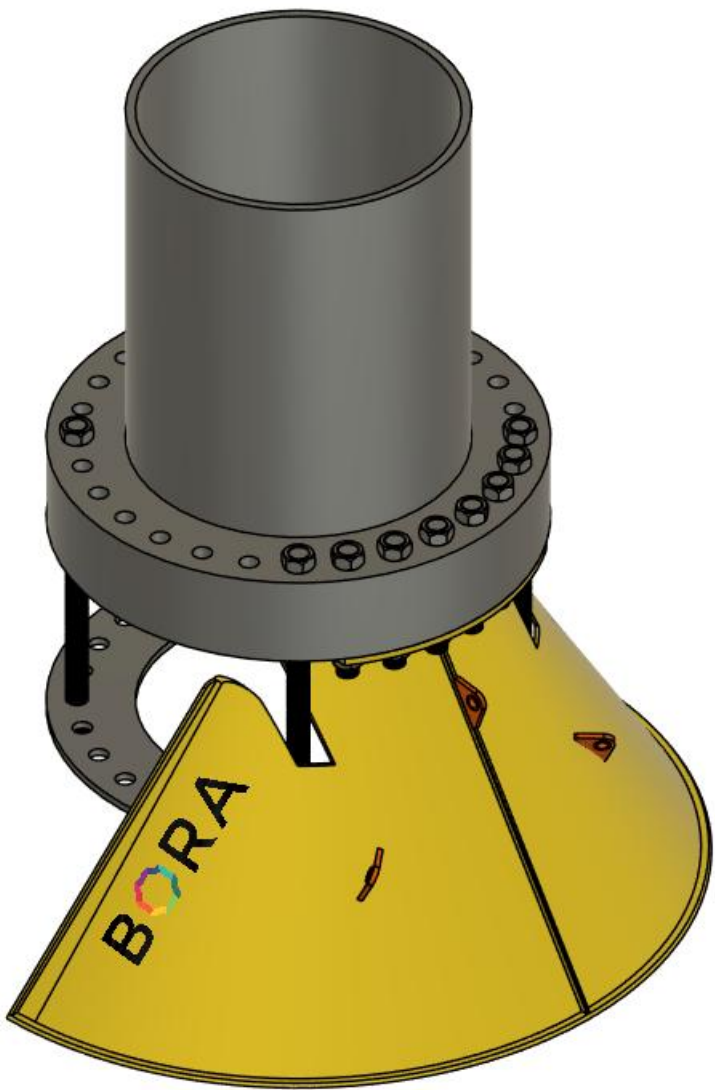

Key Specifications

Diameter
2060 mm

PCD
552.5 mm

Height
1020 mm

Bolt Hole Diameter
51 mm


Weight in Air
180 kg

Weight in Water
162 kg


Additional Points

- Main Structure - S355 Type Steel
- Painted Yellow (RAL 1004) Norsok M-501, System 1

Drawings

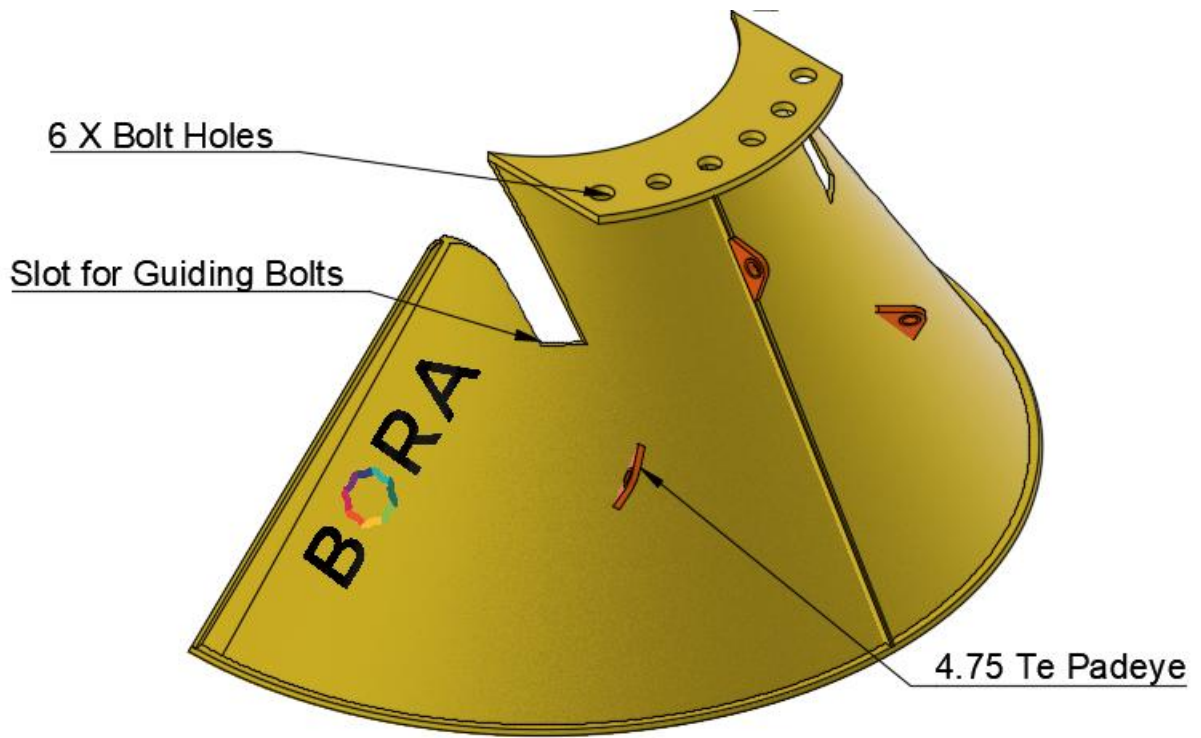

Top View

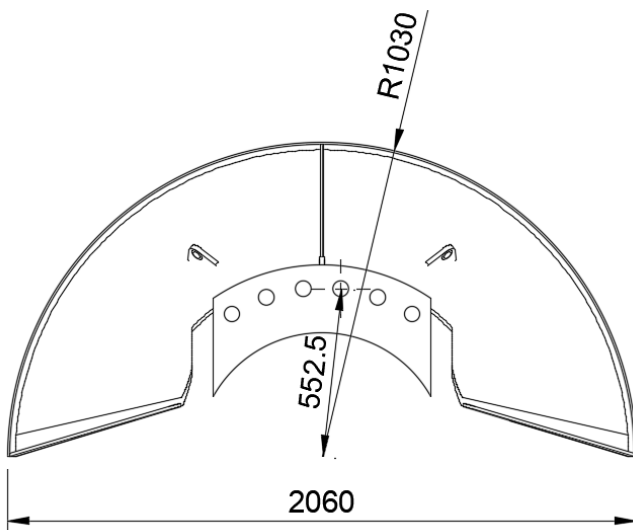

Front View

