

**Question 1:**

A geyser heats water flowing at the rate of 3.0 litres per minute from  $27^\circ\text{C}$  to  $77^\circ\text{C}$ . If the geyser operates on a gas burner, what is the rate of consumption of the fuel if its heat of combustion is  $4.0 \times 10^4 \text{ J/g}$ ?

**Solution 1:**

Water is flowing at a rate of 3.0 litre/min.  $= 3 \times 10^{-3} \text{ m}^3 / \text{min}$

Density of water,  $\rho = 10^3 \text{ kg/m}^3$

$\therefore$  mass of water flowing per minute  $= 3 \times 10^{-3} \times 10^3 \text{ kg/min}$   
 $= 3 \text{ kg/min}$

The geyser heats the water, raising the temperature from  $27^\circ\text{C}$  to  $77^\circ\text{C}$ .

Initial temperature,  $T_1 = 27^\circ\text{C}$

Final temperature,  $T_2 = 77^\circ\text{C}$

$\therefore$  Rise in temperature,  $\Delta T = T_2 - T_1$   
 $= 77 - 27 = 50^\circ\text{C}$

Heat of combustion  $= 4 \times 10^4 \text{ J/g} = 4 \times 10^7 \text{ J/Kg}$

Specific heat of water,  $4.2 \text{ J/g}^\circ\text{C}$

Total heat used,  $\Delta Q = mc\Delta T$

$3 \times 4.2 \times 10^3 \times 50 = 6.3 \times 10^5 \text{ J/min}$

Let  $m$  kg of fuel is utilized per minute.

$\therefore$  heat produced  $= m \times 4 \times 10^7 \text{ J/m}$

But, heat energy taken by water = heat produced by fuel

$6.3 \times 10^5 = m \times 4 \times 10^7$   
 $= \frac{6.3 \times 10^5}{(4 \times 10^4)} = 15.75 \text{ g/min.}$

**Question 2:**

What amount of heat must be supplied to  $2.0 \times 10^{-2} \text{ kg}$  of nitrogen (at room temperature) to raise its temperature by  $45^\circ\text{C}$  at constant pressure? (Molecular mass of  $\text{N}_2 = 28$ ;  $R = 8.3 \text{ J mol}^{-1} \text{ K}^{-1}$ .)

**Solution 2:**

Mass of nitrogen,  $m = 2.0 \times 10^{-2} \text{ kg} = 20 \text{ g}$

Rise in temperature,  $\Delta T = 45^\circ\text{C}$

Molecular mass of  $N_2$ ,  $M = 28$

Universal gas constant,  $R = 8.3 \text{ J mol}^{-1} \text{ K}^{-1}$

Number of moles,  $n = m/M$

$$= (2 \times 10^{-2} \times 10^3) / 28$$

$$= 0.714$$

Molar specific heat at constant pressure for nitrogen,  $C_p = (7/2)R$

$$= (7/2) \times 8.3$$

$$= 29.05 \text{ J mol}^{-1} \text{ K}^{-1}$$

The total amount of heat to be supplied is given by the relation:

$$\Delta Q = nC_p\Delta T$$

$$= 0.714 \times 29.05 \times 45$$

$$= 933.38 \text{ J}$$

Therefore, the amount of heat to be supplied is 933.38 J.

**Question 3:**

Explain why

- (a) Two bodies at different temperatures  $T_1$  and  $T_2$  if brought in thermal contact do not necessarily settle to the mean temperature  $(T_1 + T_2)/2$ .
- (b) The coolant in a chemical or a nuclear plant (i.e., the liquid used to prevent the different parts of a plant from getting too hot) should have high specific heat.
- (c) Air pressure in a car tyre increases during driving.
- (d) The climate of a harbour town is more temperate than that of a town in a desert at the same latitude.

**Solution 3:**

(a) When two bodies at different temperatures  $T_1$  and  $T_2$  are brought in thermal contact, heat flows from the body at higher temperature to the body at lower temperature till equilibrium is achieved, i.e., the temperatures of both the bodies becomes equal. The equilibrium temperature equal to the mean temperature  $(T_1 + T_2)/2$  only when thermal capacities of the two bodies are equal.

- (b) The coolant in a chemical or nuclear plant should have a high specific heat. This is because higher the specific heat of the coolant, higher is its heat-absorbing capacity and vice-versa. Hence, a liquid having a high specific heat is the best coolant to be used in a nuclear or chemical plant. This would prevent different parts of the plant from getting too hot. (c) When the car is in motion, the temperature of air inside the tyre increases due to motion of the air molecules. According to Charles's law, pressure is directly proportional to the temperature,  $P \propto T$ . Hence, if the temperature inside a tyre increases, then the air pressure inside the tyre will also increase.
- (d) A harbor town has a more temperate climate than a town located in a desert at the same latitude. This is because in a harbour town, the relative humidity is more than in a desert town.

#### Question 4:

A cylinder with a movable piston contains 3 moles of hydrogen at standard temperature and pressure. The walls of the cylinder are made of a heat insulator, and the piston is insulated by having a pile of sand on it. By what factor does the pressure of the gas increase if the gas is compressed to half its original volume?

#### Solution 4:

The cylinder is completely insulated from its surroundings. As a result, no heat is exchanged between the system (cylinder) and its surroundings. Thus, the process is adiabatic.

Initial pressure inside the cylinder  $= P_1$

Final pressure inside the cylinder  $= P_2$

Initial volume inside the cylinder  $= V_1$

Final volume inside the cylinder  $= V_2$

Ratio of specific heats,  $\gamma = 1.4$

For an adiabatic process, we have:

$$P_1 V_1^\gamma = P_2 V_2^\gamma$$

The final volume is compressed to half of its initial volume.

$$\therefore V_2 = V_1 / 2$$

$$P_1 V_1^\gamma = P_2 (V_1 / 2)^\gamma$$

$$P_2 / P_1 = V_1^\gamma / (V_1 / 2)^\gamma$$

$$= 2^\gamma = 2^{1.4} = 2.639$$

Hence, the pressure increases by a factor of 2.639.

**Question 5:**

In changing the state of a gas adiabatically from an equilibrium state  $A$  to another equilibrium state  $B$ , an amount of work equal to 22.3 J is done on the system. If the gas is taken from state  $A$  to  $B$  via a process in which the net heat absorbed by the system is 9.35 cal, how much is the net work done by the system in the latter case? (Take 1 cal = 4.19 J)

**Solution 5 :**

The work done ( $W$ ) on the system while the gas changes from state  $A$  to state  $B$  is 22.3 J. This is an adiabatic process. Hence, change in heat is zero.

$$\therefore \Delta Q = 0$$

$$\Delta W = -22.3 \text{ J (Since the work is done on the system)}$$

From the first law of thermodynamics, we have:

$$\Delta Q = \Delta U + \Delta W$$

Where,

$$\Delta U = \text{Change in the internal energy of the gas}$$

$$\therefore \Delta U = \Delta Q - \Delta W = -(-22.3 \text{ J})$$

$$\Delta U = +22.3 \text{ J}$$

When the gas goes from state  $A$  to state  $B$  via a process, the net heat absorbed by the system is:

$$\Delta Q = 9.35 \text{ cal} = 9.35 \times 4.19 = 39.1765 \text{ J}$$

Heat absorbed,  $\Delta Q = \Delta U + \Delta Q$

$$\therefore \Delta W = \Delta Q - \Delta U .$$

$$= 39.1765 - 22.3$$

$$= 16.8765 \text{ J}$$

Therefore, 16.88 J of work is done by the system.

**Question 6:**

Two cylinders  $A$  and  $B$  of equal capacity are connected to each other via a stopcock.  $A$  contains a gas at standard temperature and pressure.  $B$  is completely evacuated. The entire system is thermally insulated. The stopcock is suddenly opened. Answer the following:

- What is the final pressure of the gas in  $A$  and  $B$ ?
- What is the change in internal energy of the gas?
- What is the change in the temperature of the gas?
- Do the intermediate states of the system (before settling to the final equilibrium state) lie on its  $P$ - $V$ - $T$  surface?

**Solution 6:**

- When the stopcock is suddenly opened, the volume available to the gas at 1 atmospheric

pressure will be doubled. Since volume is inversely proportional to pressure, the pressure will decrease to one-half of the original value. Since the initial pressure of the gas is 1 atm, the pressure in each cylinder will be 0.5 atmosphere.

(b) The internal energy of the gas can change only when work done by or on the gas. Since in this case no work is done by or on the gas, the internal energy of the gas will not change. (c) Since no work is being done by the gas during the expansion of the gas, the temperature of the gas will not change at all.

(d) No, because the process called free expansion is rapid and cannot be controlled. the intermediate states are non-equilibrium states and do not satisfy the gas equation. In due course, the gas does return to an equilibrium state.

#### Question 7 :

A steam engine delivers  $5.4 \times 10^8 \text{ J}$  of work per minute and services  $3.6 \times 10^9 \text{ J}$  of heat per minute from its boiler. What is the efficiency of the engine? How much heat is wasted per minute?

#### Solution 7:

Work done by the steam engine per minute,  $W = 5.4 \times 10^8 \text{ J}$

Heat supplied from the boiler,  $H = 3.6 \times 10^9 \text{ J}$

Efficiency of the engine = Output energy / Input energy

$$\therefore \eta = W / H = 5.4 \times 10^8 / (3.6 \times 10^9) = 0.15$$

Hence, the percentage efficiency of the engine is 15 %.

Amount of heat wasted =  $3.6 \times 10^9 - 5.4 \times 10^8$

$$= 30.6 \times 10^8 = 3.06 \times 10^9 \text{ J}$$

Therefore, the amount of heat wasted per minute is  $3.06 \times 10^9 \text{ J}$ .

#### Question 8:

An electric heater supplies heat to a system at a rate of 100W. If system performs work at a rate of 75 Joules per second. At what rate is the internal energy increasing?

#### Solution 8:

Heat is supplied to the system at a rate of 100 W.

$\therefore$  Heat supplied,  $Q = 100 \text{ J/s}$

The system performs at a rate of 75 J/s.

$\therefore$  Work done,  $W = 75 \text{ J/s}$

From the first law of thermodynamics, we have:

$$Q = U + W$$

Where,

$U$  = Internal energy

$$\therefore U = Q - W$$

$$= 100 - 75$$


$$= 25 \text{ J/s}$$

$$= 25 \text{ W}$$

Therefore, the internal energy of the given electric heater increases at a rate of 25 W.

### Question 9:

A thermodynamic system is taken from an original state to an intermediate state by the linear process shown in figure.

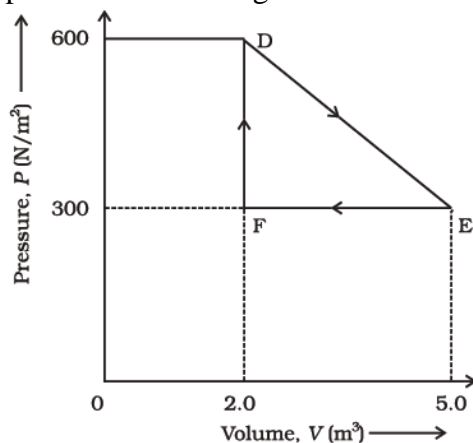

**Fig. 12.13**

Its volume is then reduced to the original value from E to F by an isobaric process. Calculate the total work done by the gas from D to E to F.

### Solution 9:

Total work done by the gas from D to E to F = Area of  $\triangle DEF$

$$\text{Area of } \triangle DEF = (1/2) DE \times EF$$

Where,

DF = Change in pressure

$$= 600 \text{ N/m}^2 - 300 \text{ N/m}^2$$

$$= 300 \text{ N/m}^2$$

FE = Change in volume

$$= 5.0 \text{ m}^3 - 2.0 \text{ m}^3$$

$$= 3.0 \text{ m}^3$$

Area of  $\triangle DEF = (1/2) \times 300 \times 3 = 450 \text{ J}$

Therefore, the total work done by the gas from D to E to F is 450 J.

**Question 10:**

A refrigerator is to maintain eatables kept inside at  $9^\circ\text{C}$ . If room temperature is  $36^\circ\text{C}$ , calculate the coefficient of performance.

**Solution 10:**

Temperature inside the refrigerator,  $T_1 = 9^\circ\text{C} = 282 \text{ K}$

Room temperature,  $T_2 = 36^\circ\text{C} = 309 \text{ K}$

Coefficient of performance =  $T_1 / (T_2 - T_1)$

=  $282 / (309 - 282)$

= 10.44

Therefore, the coefficient of performance of the given refrigerator is 10.44.