



Intelligent Sensor Soap Dispenser

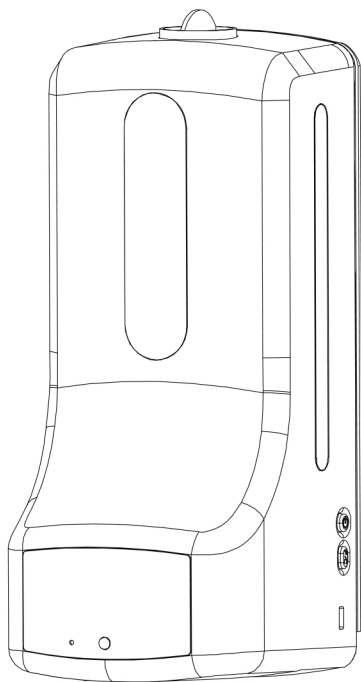

TI - 558

Appearance

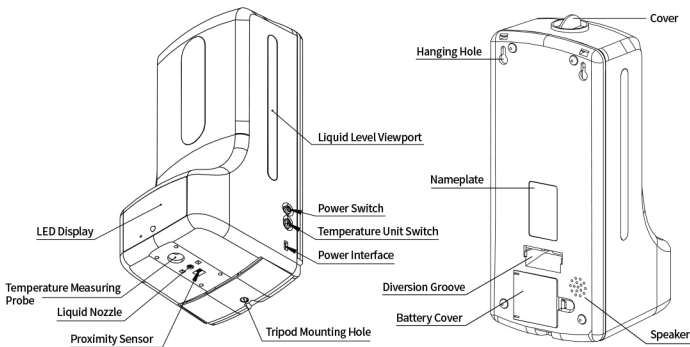


Specification

- 1.Accuracy: ±0.2°C (34~45°C, put it in the operating environment for 30 minutes before use)
- 2.Alarm type: flashing + bleeping "DIDIDI"
- 3.Measuring distance: 5cm~10cm
- 4.LED display: Number
- 5. Interface: Type-C
- 6.Bottle Capacity: 1000mL
- 7.Mounting Type: Wall-hanging, Tripod-fixed
- 8.Working Temperature: 10°C~40°C (15°C~35°C Recommended)
- 9.Measuring range: 0~50°C
- 10.Response time: 500ms
- 11.Standby time: 5s for non-working, dynamic loop with white light
- 12.Power Supply: DC 5V 1500MA(or 4 AA batteries)
- 13.Dimension: 119*133*280mm
- 14.Liquid type: hand sanitizer or liquid disinfectant

Conditions

- 1. Standby: the white dot on the bottom of right corner flashing by turns. (Fig. 1)



(Fig.1)

- 2. Normal temperature: displays current temperature and green light flashes once on the display. (Fig. 2)
- 3. Abnormal temperature: displays current temperature and red light flashes on the display. (Fig. 3)



(Fig. 2)



(Fig. 3)

- 4. Out of measuring range(Note: do not spray hand sanitizer): "Lo": Ultra-low temperature alarm.(Fig. 4); "H": Ultra-high temperature alarm. (Fig. 5)




(Fig. 4)



(Fig. 5)

Instructions

- 1. Temperature measuring and hand washing: Put your hand on the bottom until you hear a "DI" sound, then the LED screen will display the temperature and hand sanitizer squeezed out. (Fig. 6)



(Fig. 6)

- 2. Function of button:
(1) Button ①: Function setting(Fig. 7)



(Fig. 7)

- (2)Button ②: Specific function settings(Fig. 8)



(Fig. 8)

- 3.Function setting
Press the button ① once to set the temperature unit
Press the button ② to switch between Celsius and Fahrenheit
C: Celsius F:Fahrenheit (Fig. 9, Fig. 10)



(Fig.9)



(Fig. 10)

Press the button ① twice to set the working mode
Press the button ② to switch the working mode. Bo:body mode co:counting mode sur:surface mode



Press the button ① 3 times to set the alarm temperature
Press the button ② to switch the alarm temperature between 36°C to 39°C



Press the button ① 4 times to set the volume
Press the button ② to switch the volume from U0 to U4



Press the button ① 5 times to set the language
Press the button ② to set the language CH/EN/KO/PT/ES
CH: Chinese EN: English KO: Korean PT: Portuguese ES: Spanish




Press the button ① 6 times to set the squeeze amount of hand sanitizer
Press the button ② to set the extrusion time between 0.1 and 2.0 seconds




Press the Button ① for 2S or more: on/off

Mounting

- (1)Tripod mounting: There is screw connection on the bottom which can be connected with tripod. (Fig. 11)
- (2) Wall-hanging: There are two hanging holes on the back side can be fixed with nail. (Fig. 12)




(Fig. 11)




(Fig. 12)

- (3)Desktop stand: Put the Intelligent Sensor Soap Dispenser in the desktop stand to use(Fig. 13)
- (4)Wall-hanging Desktop stand: there are two hanging holes on the back side can be fixed with nail.(Fig. 14)




(Fig. 13)



(Fig. 14)

- (5)Hanging the desktop stand on the tripod (Fig. 15)
- (6)Power On/Off: Press the switch button on the right side of the device(Fig. 16)



(Fig. 15)



(Fig. 16)

- (7)Battery installation: Open the battery cover, take out the battery box, unscrew the screws and put in 4 AA batteries (Fig. 17).



(Fig. 17)

Warnings

- 1. Do not pour hand sanitizer into Temperature Measuring Probe and Proximity Sensor.
- 2. Make sure that it is standing upright after filling in hand sanitizer.