




ATTACHMENTS EXTREME POLE SETTER

EZ-HD88



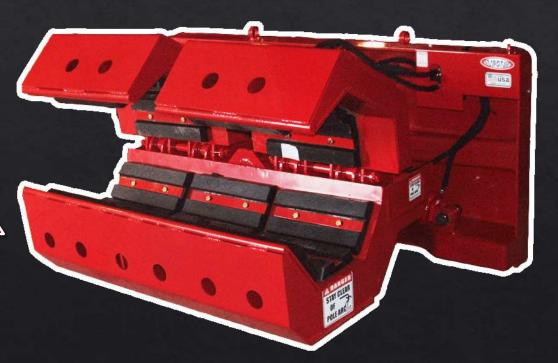



SAFETY FEATURES





Decal Safety
 All units have
 pictorial and
 written
 caution decals

HOSE SAFETY

- All hydraulic hoses are <u>Cordura</u> protected.
- Hoses have an operating pressure of 3,000psi
- Hoses have a burst pressure of 12,000psi.
- The spring hose unit ensures that the hydraulic line will not get pinched.
- The spring hose unit keeps the hoses out of the dirt



SPRING HOSE
MOUNT




CONNECTION SAFETY


Bolted on by 16 1" grade 8 bolts

Mounts have gussets

Mounts are Grade 80

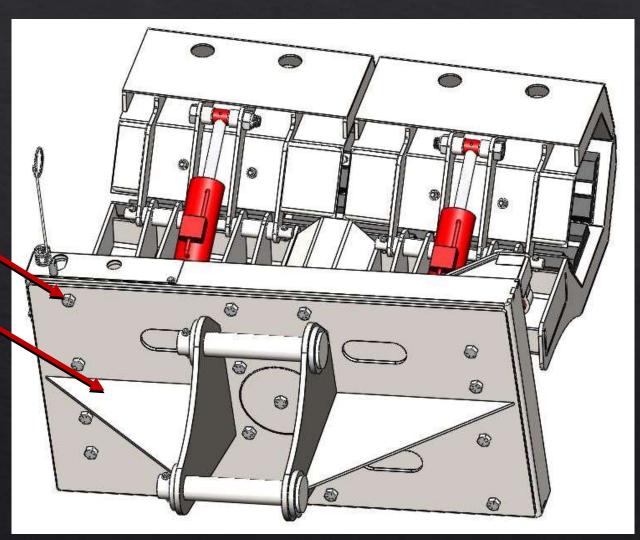

CLAMP SAFETY

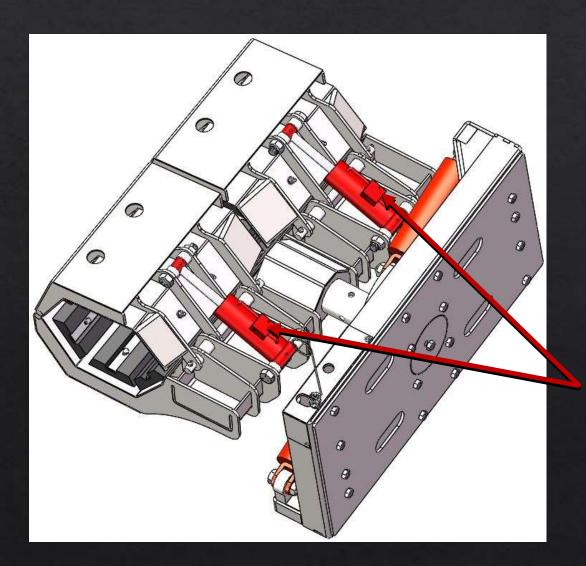

Clamp Safety
The clamp cylinders
are protected by
check valves which
maintains clamp if
hydraulic pressure is
lost.

Check Valves

SHAFT SAFETY

The main rotating shaft is made of solid 4 ½ inch 4140 OQT steel sleeved with a 6 1/8 inch OD 3/4 inch wall thickness to relieve stress for the tool.







SAFELY SET
POLES

SAFELY PULL POLES




EZSPOTUR Make it EZ!
ATTACHMENTS

FULL POLE CONTROL





Clamp Specifications

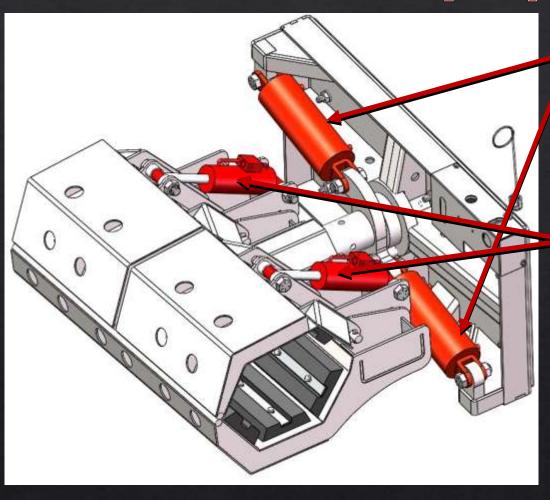

- 1. ROTATION CYLINDERS
- 6"x12.5" CLAMP CYLINDERS
- Break out force of 84,823 lbs

- 2. CLAMP CYLINDERS
- 4"x8" CLAMP CYLINDERS
- Break out force of 37,699 lbs
- Grips pole securely
- The upper clamp arms operate in sequence which ensure that a pole is not unintentionally dropped.

Product Specifications

- Attaches to large excavators or wheel loaders
- Rotates 115 degrees to the operators left
- Maximum opening of jaws is 26 inches
- Minimum opening of jaws is 13.5 inches.
- Attachment Weight: 3000 lbs
- Bolt on mount adds extra weight
- Inserts available for smaller diameter poles





Product Specifications

- Rated for 100 foot poles
- Rated weight capacity is 10,000 lbs
- Grade 8 bolts
- Upper Jaws have 1 3/8" 4140 pins
- Yield Strength 60,200 ps
- 3/4" flush faced couplers included
- Core Welded







