







# SAFETY FEATURES

# ATTACHMENTS Make it EZ!

ROTATION SAFETY
The rotation cycle has a mechanical stop to prevent the hydraulic cylinders from exceeding their maximum extension, which would cause the attachment to rotate too far and damage it.



DECAL SAFETY
All units have pictorial and written caution decals.

## HOSE SAFETY

- All hydraulic hoses are <u>Cordura</u> protected.
- Hoses have an operating pressure of 3,000psi
- Hoses have a burst pressure of 12,000 psi.
- The spring hose unit insures that the hydraulic line will not get pinched.
- The spring hose unit keeps the hoses out of the dirt




## CONNECTION SAFETY

Quick attach plate has doublers at the pin holes to insure they will not tear out.


Quick attach plate has gusset on top for extra support

**QUICK ATTACH GUSSET** 

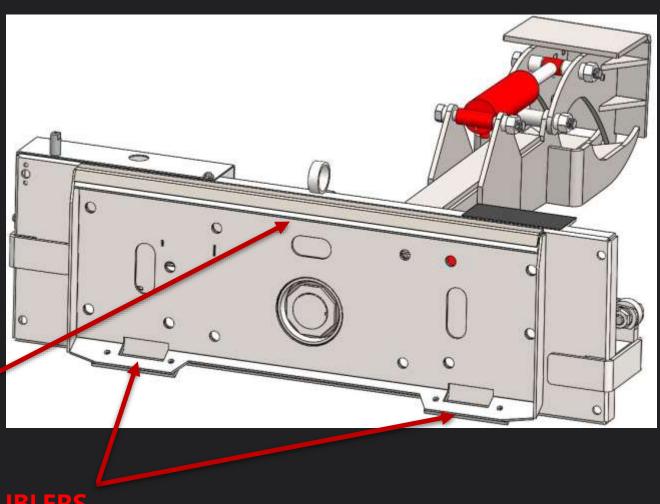

**DOUBLERS** 

# Cylinder Specifications

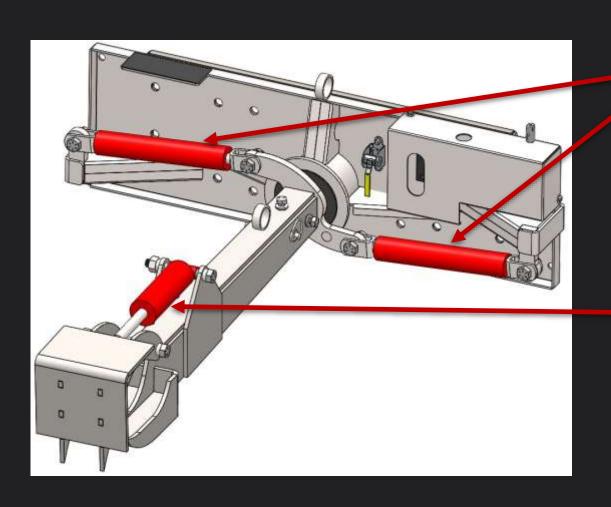


- 1. ROTATION CYLINDERS
- 2.5"x12.5" CLAMP CYLINDERS
- Break out force of 14,726 lbs


- 2. CLAMP CYLINDER
- 3"x6" CLAMP CYLINDER
- Break out force of 21,206 lbs
- Grips railroad tie securely

### Jaws Specifications

#### **Dimensions of closed jaws**

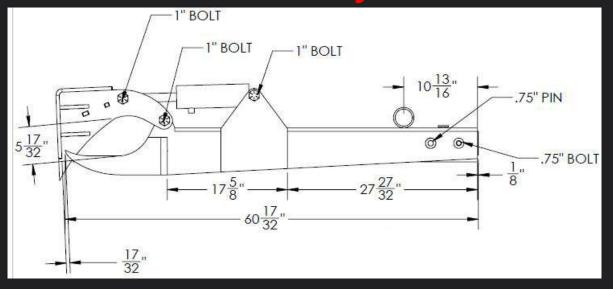

#### **Dimensions of open jaws**

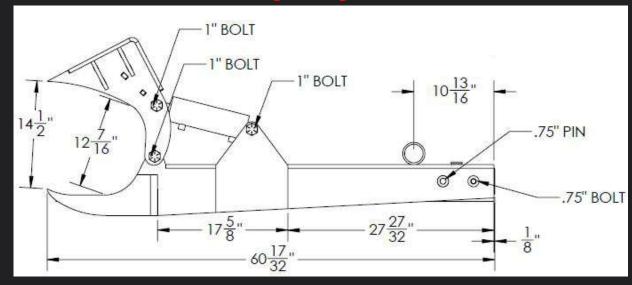



# REMOVE OLD & DAMAGED TIES



# SAFELY INSTALL NEW CROSSTIES

When closed, the jaws create a flat front that allows the operator to quickly and easily place a railroad tie.



# MOVE AND REPLACE TRACK









### Product Specifications

- Universal Quick Tach' mounting system
- Can be adapted to fit any machine
- Rotates 110° to the operators left on a Double Cylinder Rotating Base.
- Can also be attached to a Fixed Non-Rotating Base.
- Attachment Weight with Double Cylinder Rotating Base: 761 lbs
- Rated Weight Capacity: 1000 lbs





### Product Specifications

- Comes complete with ¾" flush faced couplers
- Grade 8 Bolts
- Spring hose mount included
- Wiring harness included
- Composed of Grade 50 materia



# RAIL TOOL VIDEO



