





SAFETY FEATURES





ROTATION SAFETY The rotation cycle has a mechanical stop to prevent the hydraulic cylinders from exceeding their maximum extension.

DECAL SAFETY All units have pictorial and written caution decals.

HOSE SAFETY




- All hydraulic hoses are Cordura protected.
- Hoses have an operating pressure of 3,000psi
- Hoses have a burst pressure of 12,000psi.
- The spring hose unit insures that the hydraulic line will not get pinched.
- The spring hose unit keeps the hoses out of the dirt



CONNECTION SAFETY

Quick attach plate has doublers at the pin holes to insure they will not tear out.

Quick attach plate has gusset on top for extra support

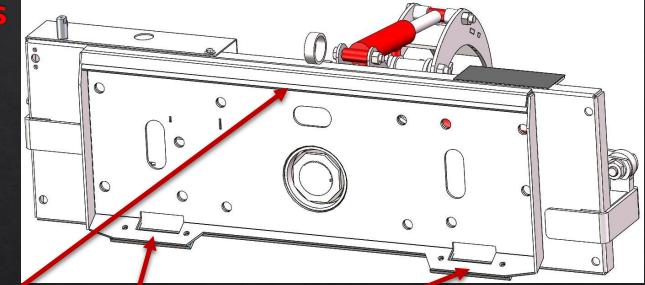


QUICK ATTACH GUSSET

DOUBLERS

Cylinder Specifications

- **1. CLAMP CYLINDER**
- 2"x6" CLAMP CYLINDER
- Break out force of 9425 lbs
- Grips material securely

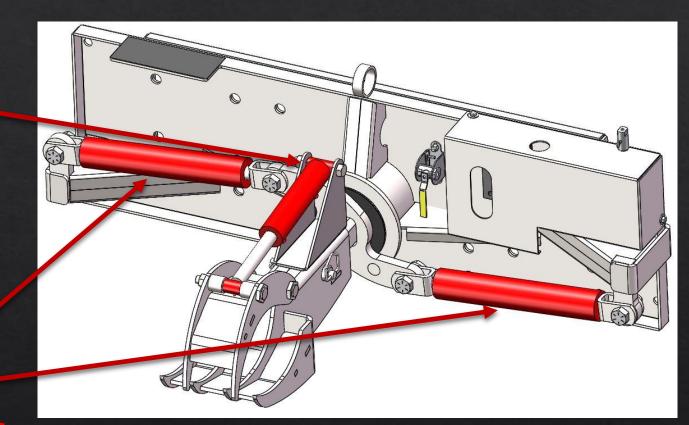


2. ROTATION CYLINDERS 2.5"x12.5" CLAMP CYLINDERS


Break out force of 14,726 lbs

Jaws Specifications


Dimensions of closed jaws

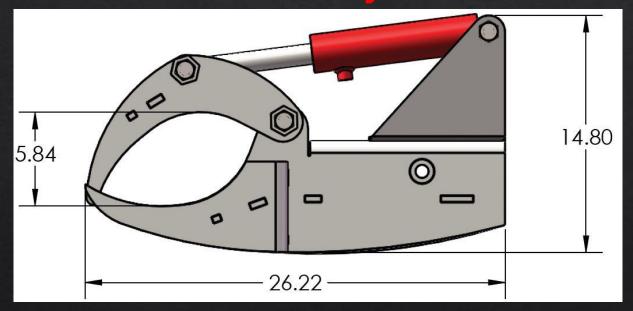


Dimensions of open jaws

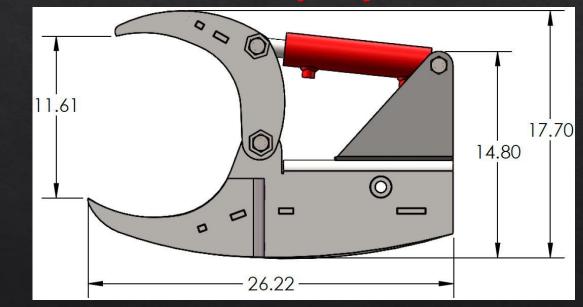


Boom Lengths Available

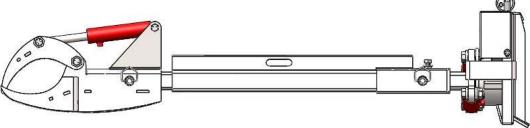


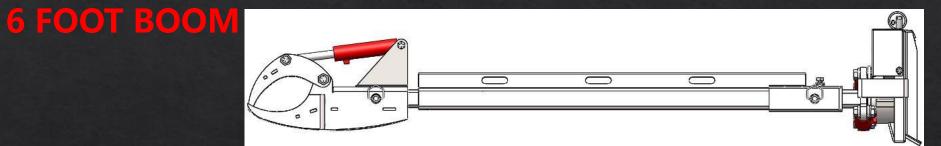

8 FOOT BOOM

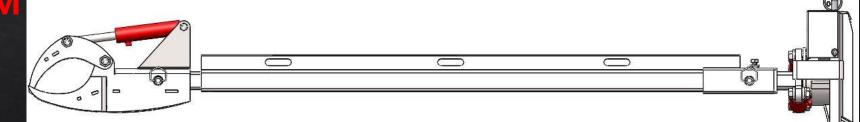



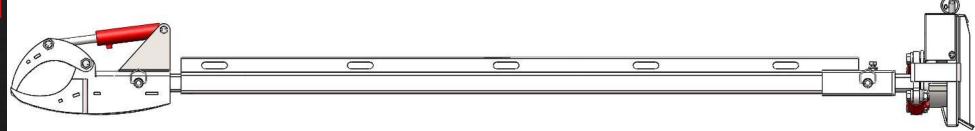



VERSATILE TO ANY JOB INCLUDING UTILITY WORK, FARM WORK, LANDSCAPING AND MORE

HANDLES ROCKS, TREES, POLES AND OTHER MATERIALS



PRODUCT SPECIFICATIONS

- Universal Quick Tach' mounting system.
- Can be adapted to fit any machine
- Rotates 110° to the operators left when attached to an EZ Spot UR Double Cylinder Rotating Base.
- Attachment Weight: 532 lbs on a Double Cylinder Rotating Base
- 1000 lb weight capacity







PRODUCT SPECIFICATIONS

- Can also be attached to an EZ Spot UR Fixed Non-Rotating Base.
- Comes complete with 3/4" flush faced couplers
- Spring hose mount included
- Wiring harness included.
- Composed of Grade 50 material or higher.
- Core welded to withstand years of wear and tear.



