

COOLING NEEDS • HEATING NEEDS • TRAILER NEEDS



**PORTABLE AC AND HEATING • COOLING FANS
TENTS • COOL DOWN CORRALS
KUBOTA SIDE BY SIDES • KUBOTA TRACTORS
TRAILERS • HEATERS • PIPE RACKS
AND MUCH MORE**

Office: 281-422-4647
P. O. Box 1761, Baytown, TX 77522

Bill Rhoades
Cell: 832-748-8170
ttcsitexastemp@aol.com


Adam Rhoades
Cell: 281-723-3140
adam@texastemperaturecontrol.com

Raymond Quinones
Cell: 713-447-8310
raymond@texastemperaturecontrol.com

WWW.TEXASTEMPERATURECONTROL.COM

A/C OR HEAT “COOL DOWN CORRAL”

- Portable 16' to 20' bumper pull lowboy trailer
- Non-skid steps and flooring
- Metal insulated roof and front wall
- 2 - 10' to 14' heavy duty benches
- Inside and outside safety lights
- Exit sign with battery backup
- One stabilizing, leveling jack on each corner
- Fold down steps with hand rails
- Fire extinguisher
- Clear, fire retardant sidewalls
- 4 external tie down points
- 2 - 110V, 15,000btu air conditioners wired with external fused disconnects
- 50' each 10 gauge power cord
- 1 - 110V, 20 Amp power sources required for each A/C unit

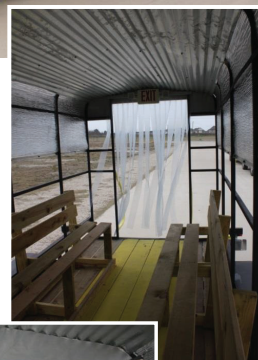

HEAT OPTION

- 2 - 110V, 12,000btu heat pumps wired with external fused disconnects
- 230V heat pumps with 480V conversion package upon request



INTRINSICALLY SAFE “COOL DOWN CORRAL” WITH AC MODEL CDC-LYB-24000-HG



- Portable 16' to 18' bumper pull lowboy trailer
- Non-skid steps and flooring
- Metal insulated roof and front wall
- One stabilizing, leveling jack on each corner
- Fold down steps with hand rails
- Clear, fire retardant sidewalls
- 24,000 BTU Intrinsically safe air conditioner
- Class 1, Division 2, Groups A, B, C, D
- 208/230 Voltage, 15/20 apms, 60 hertz
- 2 - 10' to 14' heavy duty benches
- Models will come with an intrinsically safe junction box with 12 gauge terminal bar
- Rear freezer doors available upon request



LUNCH ROOM A/C “COOL DOWN CORRAL”

- Portable 16' to 20' bumper pull lowboy trailer
- Non-skid steps and flooring
- Metal insulated roof and front wall with microwave rack
- 2 - 10' to 14' heavy duty benches
- Inside and outside safety lights
- Exit sign with battery backup
- One stabilizing, leveling jack on each corner
- Fold down steps with hand rails
- Fire extinguisher
- Clear, fire retardant sidewalls
- 4 external tie down points
- 2 - 110V, 15,000btu air conditioners wired with external fused disconnects
- 50' each 10 gauge power cord
- 1 - 110V, 20 Amp power sources required for each A/C unit



“COOL DOWN CORRAL” WITH 36” INTRINSICALLY SAFE EVAPORATIVE FAN

- Portable 18' to 20' bumper pull lowboy trailer
- Non-skid steps and flooring
- Metal insulated roof
- 2 - 10' to 14' heavy duty benches
- One stabilizing, leveling jack on each corner
- Fold down steps with hand rails
- Fire extinguisher
- Fire retardant clear side walls available
- Walk through covered doors with freezer curtains available
- 36” Intrinsicly safe fan with 275 gallon water tank
- UL and CSA Class 1, Division 1, Group C and D
- Class 2, Group F and G
- 15' 12 gauge power cord



36” - 48” FAN “COOL DOWN CORRAL”

- Portable 16' to 20' bumper pull lowboy trailers
- Non-skid steps and flooring
- Metal insulated roof
- 2 - 10' to 14' heavy duty benches
- Inside and outside safety lights
- Exit sign with battery backup
- One stabilizing, leveling jack on each corner
- Fold down steps with hand rails
- Fire extinguisher
- Clear, fire retardant sidewalls
- 4 external tie down points
- 36” evaporative fan with 275 gallon water tank
- 50' 12 gauge power cord
- Fused breaker box



“COOL DOWN HUT”



- Skid Mounted with forklift pockets on rear and side - Approximate weight is 2,000 lbs
- 8'W x 12'L construction (96 sqft) - Overall Ski dimensions 8' W x 14' L
- 2-10' benches - Fire Extinguisher - Clear FR sidewall with FR canvas roof
- Standard 2 - 110V, 14,000btu air conditioners wired with external fused disconnects
- 2 - 50' each 10 gauge power cord
- 1 - 110V, 20 Amp power source required for each A/C unit
- Units with either 110 volt ac/heat pump or 230 ac/heat units for year round applications
- 480 volt 3 phase power option with transformer coming soon
- Units can be configured with benches or as process/permit hooch for all T/A needs
- Units can be wired with inside lighting and 20 amp GFCI plugs as needed per site request

10KW PRIME RATING, SINGLE-PHASE, KUBOTA TIER 4 FINAL GENERATOR

The DCA10SPXU4C is a 10 kW Single Phase generator with a 1.0 power factor and 120/240 volt output. It features an electronic governor control; an easy to read analog control panel; a sound attenuated, weatherproof steel housing that is lockable and designed with a single point lifting eye. Its easy to maintain design offers quick access to all filters and drain extensions.



14KW PRIME RATING, SINGLE-PHASE, KUBOTA TIER 4 FINAL GENERATOR

The DCA15SPXU4F is a 15 kW Single Phase generator with 1.0 power factor and 120/240 volt output. The unit features a steel, sound attenuated, weatherproof and lockable housing. Its easy to maintain design offers quick and direct access to all filters and drain extensions. An electronic governor control maintains steady state 60 Hz within 0.25% from no load to full load. Its comprehensive analog control panel includes several instruments including an ammeter, frequency meter, AC circuit breaker and much more.



9.7KW, 120/240V, HONDA, ELECTRIC START GENERATOR

- Twin duplex receptacles and three twist-lock receptacles for job site versatility
- 100% copper windings for maximum conductivity
- Alternator design eliminates maintenance by removing brushes and slip rings
- Heavy-duty 1-inch (25 mm) steel pipe frame and shock mounts protect the generator
- Powered by a twin-cylinder Honda GX630 engine with low-oil shutdown, automatic idle control
- Full panel GFCI protection - OSHA and NEC compliant



7KW PRIME RATING, SINGLE-PHASE, KUBOTA TIER 4 FINAL GENERATOR

The DA7000SSA3 is a 7kW Single phase generator with a 1.0 power factor, 120/240 volt output and has a 2-pole field. It features a mechanical governor that maintains a steady state 60 Hz within 3-5% from no load to full load. Its comprehensive analog control panel includes instruments such as an lamps, volt meter, and hour meter along with a Main GFCI circuit breaker. A single-side maintenance design provides direct access to all filters. At 534 lbs (242 kg), the DA7000SSA3 is the lightest model in the series of WhisperWatt Super-Silent Generators.



30' - 38' FLATBED TRAILER



- Available with or without dollies
- Units can be over the road ready or for in plant use only
- All units will come with registration and State of Texas DOT inspection upon request
- 20,000lb - 40,000lb GVWR

GOOSENECK TRAILERS



Assorted sizes and capacities available upon request

YARD TRAILERS



- Easy maneuverability yard trailers feature 16 ply air craft tires
- Pintel hook connection with 10,000 to 14,000 lb gross weight capability
- 20 to 30 foot trailers available upon request

DROP DECK TRAILERS - 40-80 FT



- Equipped with side winches
- 40,000 GTW and up
- Any upgrade required by plant will be at customer expense
- Dollies available for rent separate or with a trailer as pair
- Current Texas Licensed
- Current TxDOT inspection

FLATBED TRAILERS - 40' - 50'



- All Trailers have current Texas DOT inspected and Texas License Plates
- Winches
- Texas Titled

STRETCH TRAILERS - 40-80 FT



- Equipped with side winches
- 40,000 GTW and up
- Any upgrade required by plant will be at customer expense
- Dollies available for rent separate or with a trailer as pair
- Current Texas Licensed
- Current TxDOT inspection

KUBOTA SIDE BY SIDES



Kubota Side by Sides
2 seat and 4 seat options
Four Wheel Drive, Flashing Beacon
Lights, Seat Belts, Backup Alarm, Fire
Extinguisher, Windshield (Glass or Plexi-
glass)

** Optional 100 gallon double walled fuel
tank with pump, retractable hose reel
with auto shut off handle, retractable
ground cable, tool box and gallon
meter***

KUBOTA TRACTOR M7040



- 70 Horsepower
- 4 wheel drive
- Pintel hook
- Shuttle shift
- Backup alarm
- Yellow safety beacon
- Safety canopy
- Fire extinguisher
- 700 lbs of front end counter weight available
- Front end loader, box blade and brush hog available

ELECTRIC OVER PROPANE TENT HEATERS



- Versatile indoor and outdoor placement of heater
- Direct-fired for 99.97% fuel efficiency
- High volume of air output for maximum heat distribution
- Dependable, electronic spark ignition
- Trouble shooting lights help keep heater up and running
- Quiet operation
- 20' remote start thermostat standard
- Totally enclosed flame, airflow safety devices and enclosed electronics

DIESEL HEATER



- 210,000 BTU heat output
- 120V operation
- 13 gallon tank capacity
- Fuel consumption 1.6 gph
- 5000 sq. ft. heating area
- Built in thermostat
- On/Off switch
- Fuel gage
- Power failure indicator
- Thermal protection
- Fuel safety shutoff

PROPANE FIRED HEATER



- 120,000/150,000 BTU heat output
- 120V operation
- Fuel rate 7 lb/hour
- 3500 sq. ft. heating area
- 15ft hose with regulator
- 100 lb cylinder available

2 TO 5 CUBIC YARD MEDIUM DUTY SELF-DUMPING HOPPER



- 4000 LB. to 6500 LB. Capacity
- Water tight 10 Gauge Carbon Steel Box painted industrial enamel gray
- 3/8" Laser cut single piece rockers
- 1/4" Formed Steel Base - 40" W x 56" L
- Fork pocket opening 30" W x 2.75" H
- Formed steel top & support rails
- Shipping weight 687 lbs.

MULTIQUIP CONCRETE AND SMALL CIVIL EQUIPMENT



DIAMOND PIPE RACKS



- Made of either 3 or 4" heavy wall pipe and come in different sizes. (20-30 ft)
- They are great for keeping exotic metals out of the dirt and mud.
- They do not leave any potentially hazardous chemicals on or in the surface like creosote or treated post might do

TENTS



Texas Temperature Control Services Inc. can provide you with your structure style and/or frame style lunch tent or warehouse tent in various sizes. Tents can be furnished from size 10x20 and up. We also provide lighting, picnic tables and the portable cooling that your tents need.

PORTABLE AIR/HEATING CONDITIONER

- Skid Mounted 10 to 40 ton units available (4000 to 16000 cfm)
- Most A/C units come equipped with 66kw worth of electric heat
- Requires dedicated 480 volt of 3 phase power



PORTABLE EVAPORATIVE COOLING FANS

Features durable one-piece molded plastic polyethylene housing, 3/4" garden hose connection supplies water, long term dependability and maintenance-free operation.

- Available in 4 sizes (16", 24", 36" or 48")
- Works with 20 amps of dedicated 110v power
- Intrinsically safe models also available





CUSTOMERS

- ExxonMobil
- Shell
- Ref-Chem
- Performance Contractors
- Worley
- Austin Industries
- Able Tool
- Equipment Share
- S & B
- Herc Rentals
- McDermott
- JVIC
- United Rentals
- Turner Industries
- LyondellBasell

