

LED T8 8FT Tube - CCT and Watt Selectable




Certification



Application: Perfect for indoor and outdoor locations such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

Installation

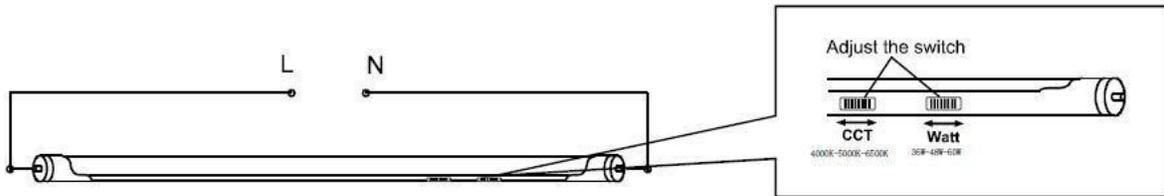

Specifications

Model	T8-8FT-60W-C-CCT(C)	T8-8FT-60W-C-CCT(F)	T8-8FT-60W-R-CCT(C)	T8-8FT-60W-R-CCT(F)
Lens	Clear Cover	Frosted Cover	Clear Cover	Frosted Cover
Lamp Base	FA8 Single Pin		R17D (HO)	
Wattage	36W-48W-60W Selectable			
Lumen Output	4680LM-6240LM-7800LM Selectable			
Max Current	0.513A@60W&120V;		0.232A@60W&277V	
Input Voltage	AC100-277V 50/60Hz			
CCT	4000K-5000K-6500K Selectable			
Beam Angle	180°			
CRI	Ra>80			
Working Temperature	~4°F ~+113°F / ~20°C ~+40°C			
Environment Location	Damp Location			
Life Span	Lumen Maintenance over 70% @ 50,000+ Hours			
Lamp Shell	AL&PC			
DLC ID	S-W18BF6 [Internal Driver/Line Voltage (UL Type B) Lamps]			
PCS/BOX	20			
Master Box Dimension	242MMx20MMx18MM / 96"x7.8"x7"			
Master Box Weight	12.44KG / 27.42 LBs			