


Project Name: _____
Date: _____ **Note:** _____

LED SHOP LIGHT



Application: residential garage, basement, supermarket, warehouse, office, factory, commercial and industrial space

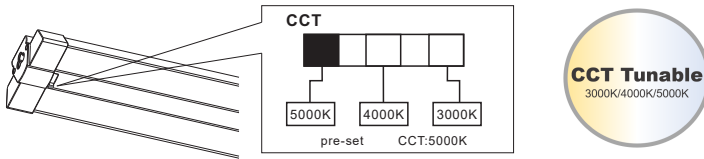

Certifications




FEATURE

- Easy Installation and connection
- Body: Aluminum Heat sink for Efficient Heat Dissipation
- Linkable: with wire harness connection kit included for connecting power between fixtures
- CCT adjustable switch on front of the fixture

SPECIFICATIONS

| | |
|-----------------------|-----------------------------------|
| Model No | HY-4FT-LSP-30W-30K/40K/50K |
| Power | 30W |
| Input Voltage | AC 110-277V |
| Luminous Flux | 4156.93 LM |
| Efficacy | 130 LM/W |
| Power Factor | >0.9 |
| CCT | CCT Selectable: 3000K/4000K/5000K |
| CRI | >80 |
| Working Life | >50,000 hours |
| Working Temperature | -10°F to 105°F |
| Protection Level | Dry/Damp Location |
| DLC Family Code | P50DDZJQ |
| Qty/Pack | 10 |
| Master Package Size | 47.83"8.66"x7.87" |
| Master Package Weight | 24.91 LB |

ACCESSORIES


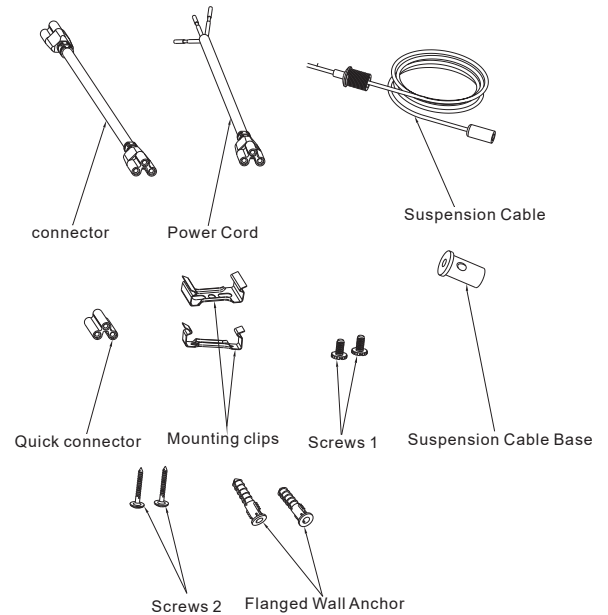


ORDERING CODE DEFINITION

EXAMPLE: HY-4FT-LSP-30W-30K/40K/50K





| Company Code | Length | Product | Wattage | CCT |
|--------------|--------|------------------------|---------|-------------------------------------|
| HY | 4FT | LSP: Linear Shop Light | 30W | CCT 3000K Tunable 4000K 5000K |

PRODUCT DIMENSIONS





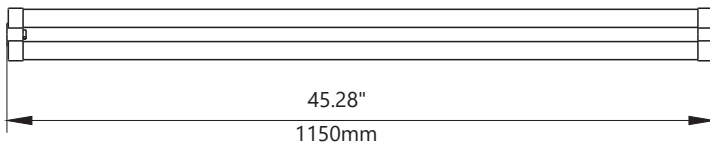


INSTALLATION INSTRUCTION

SURFACE MOUNT INSTALLATION

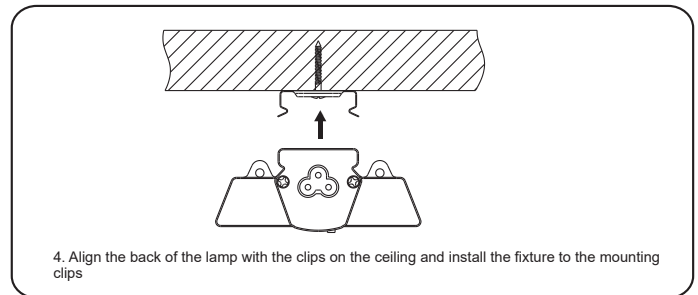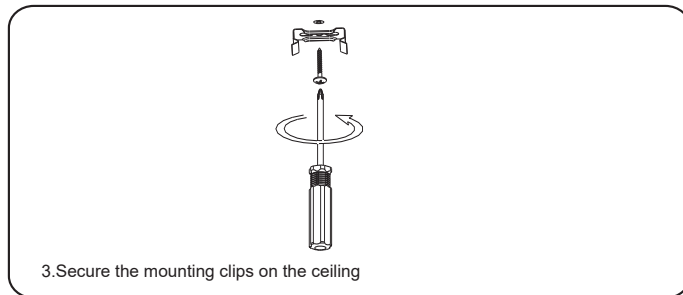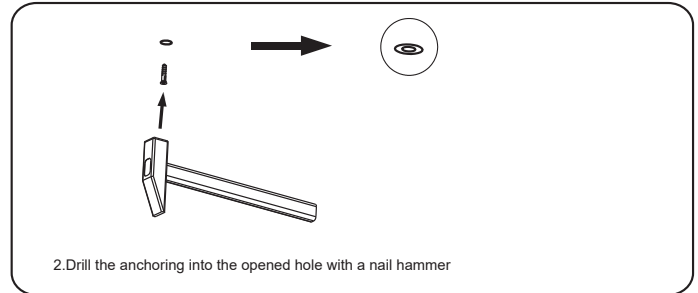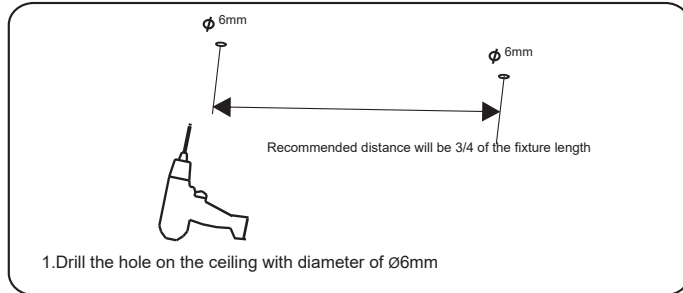

SUSPENDED MOUNT INSTALLATION

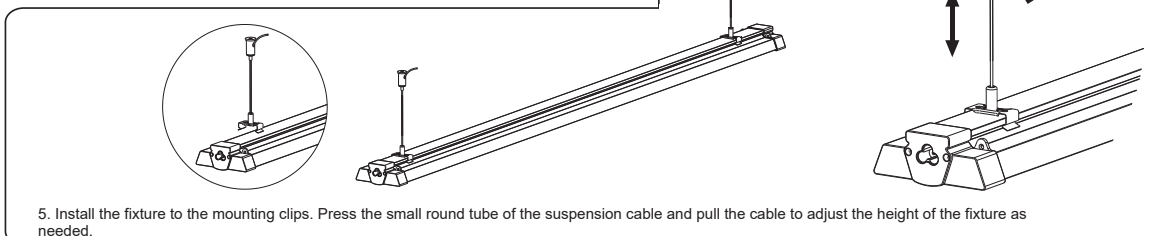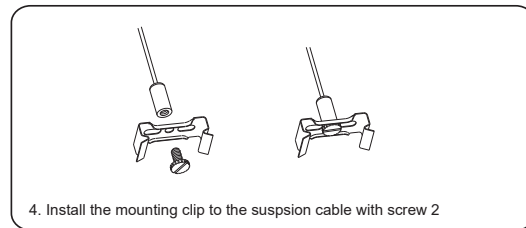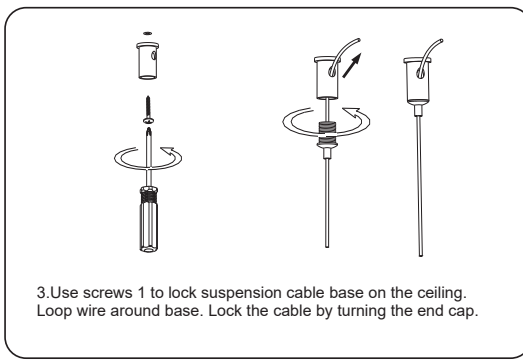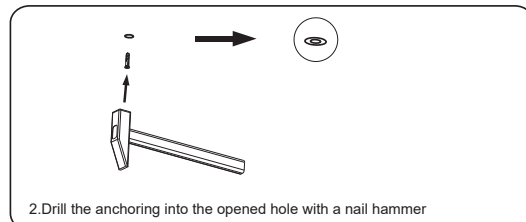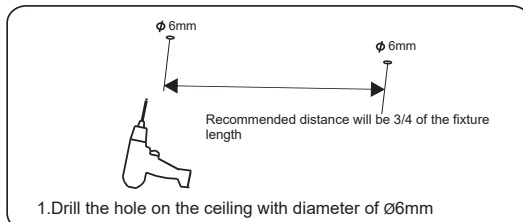


INSTALLATION INSTRUCTION


CONNECTION GUIDE

1. Please find the connector in the accessories bag.
2. Plug the connector into the tube.


Note:
For safety standard,
please do not connect more than 4pcs 4ft LED lamp in a row; do not
connect more than 3 pcs 8ft LED lamp in a row.

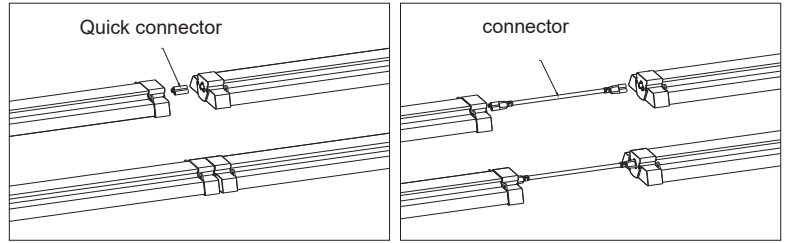

WIRING

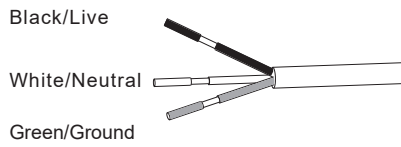


CCT ADJUSTABLE GUIDE

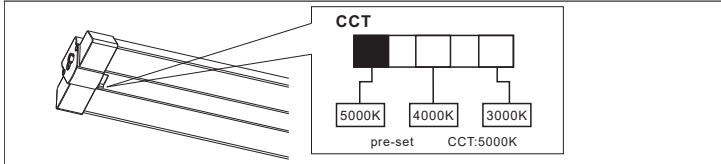

This Fixture has three color temperature of (3000K, 4000K, 5000K) and CCT can be adjusted by the switch on the front of the fixture.

PHOTOMETRIC REPORT

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

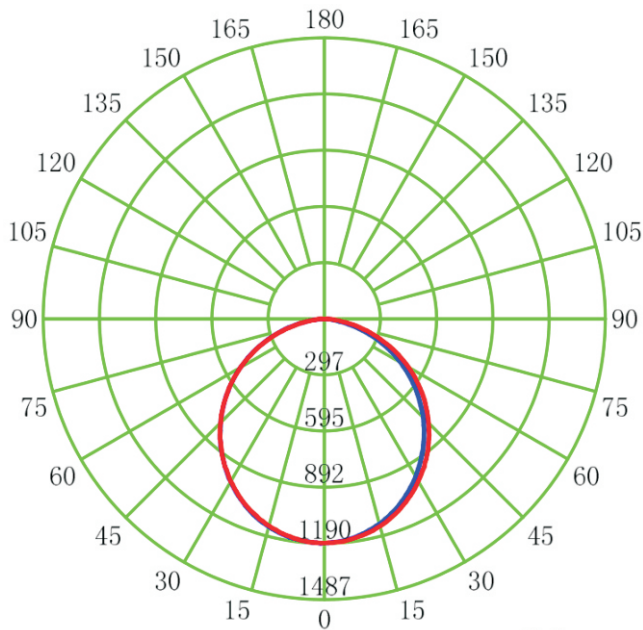

— C0-C180 — C90-C270

VERTICAL EQUILUMINOUS CURVE

