


LED UFO High Bay – UFO6 Series

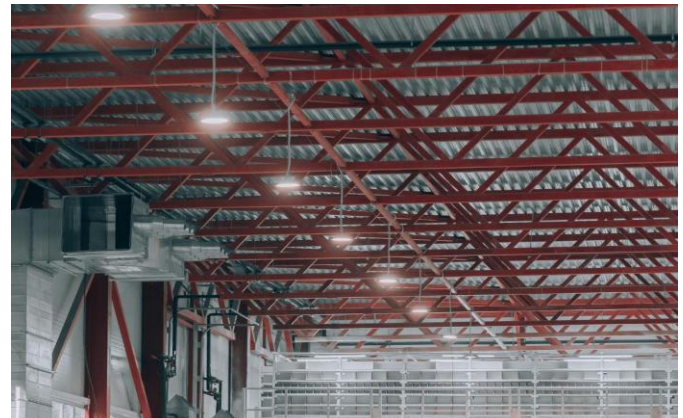

Application: Warehouses, Distribution Centers, Retailers, Field Houses, Gymnasiums, Aisles and more commercial and industries applications.

Description

- Sleek and modern design.
- Superior heat dissipation.
- DLC 5.1 Premium certification with high luminous efficacy and low UGR.
- Equipped with branded drivers and LEDs, featuring 0-10V dimming.
- Optional PnP sensor.
- Round emergency driver for quick installation.
- Extensive accessory options available.
- Selectable CCT(4000K-5000K) and wattages.

Sensor Feature



| Specification | | | |
|--------------------|--|---|---|
| Model | HYA-UFO6-150W-110-H-TWCCT (UFO6 Series) | HYA-UFO6-240W-110-H-TWCCT (UFO6 Series) | HYA-UFO6-300W-110-H-TWCCT (UFO6 Series) |
| Power | 80/100/150W | 150/200/240W | 200/240/300W |
| Lumens | 14000/16800/21000 lm | 21000/28000/33600 lm | 36400/39200/42000 lm |
| Metal Halide Equal | 250-400W | 400-1000W | 1000-1500W |
| Input Voltage | AC110-277 V | | |
| Beam Voltage | 110° | | |
| Housing | Die-cast Aluminum Housing | | |
| Dimming | 0-10V | | |
| Protectng Rating | IP65 | | |
| Power Factor | 0.9+ | | |
| CCT | 4000K-5000K Selectable | | |
| CRI | 80+ | | |
| Working Life | Lumen Maintenance Over 70% @ 50,000+ hours | | |
| Oper. Temperature | -40°F to 113°F (-40°C to 45°C) | | |




LED UFO High Bay – UFO6 Series

Ordering Guide




| Company Code | Product Series | Wattage | H | 3W | 3CCT | Option |
|--------------|----------------|--|-------------|----------------------|-------------------------------|----------------------|
| HY | UFO6 Series | 150W 80W/100W/150W Adjustable | H: 120-277V | 2 Watt Adjustable | 4000K- 5000K Selectable | Blank: N/A |
| | | 240W 150W/200W/240W Adjustable | | | | MS: Motion Sensor |
| | | 300W 200W/240W/300W Adjustable | | | | BT: Bluetooth Sensor |

Dimensions

Unit



Hook



80-100-150W

150-200-240W


200-240-300W

Watt and CCT Adjustable


C/B/A (Minimum / Middle / Maximum wattage) ,

NW/CW (CCT:40K/50K)


1.Remove the rubber pad from the driver

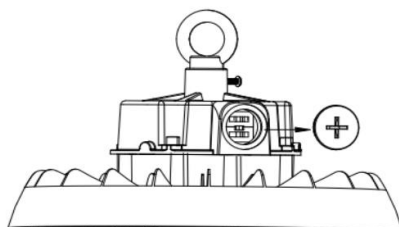

2.Use the slide switch to select wattage and CCT

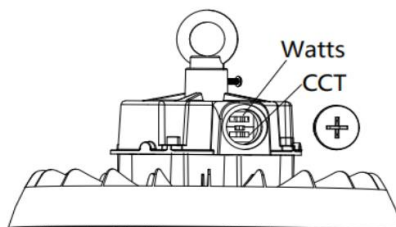

3.Attach the rubber pad to the driver

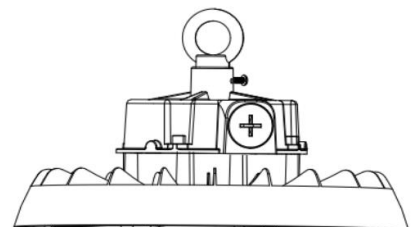

LED UFO High Bay – UFO6 Series

Package Information

| Model. No. | HY-UFO6-150W-110-H-TWTCCT | HY-UFO6-240W-110-H-TWTCCT | HY-UFO6-300W-110-H-TWTCCT |
|----------------|--|---------------------------------------|-------------------------------------|
| Power | 80W/100W/150W | 150W/200W/240W | 200W/240W/300W |
| QTY/PACK | 1 PC | 1 PC | 1 PC |
| Package Size | 260x260x136mm 10.23 x 10.23 x 5.35 in | 310x310x147mm 12.2 x 12.2 x 5.8 in | 336x336x150mm 13.2 x 13.2 x 6 in |
| Package Weight | 2.2kg/ 4.85 lbs | 3.25kg/ 7.17 lbs | 3.72kg/ 8.20 lbs |
| Package CBM | 0.0092 | 0.0141 | 0.0169 |

Photometric Report

HY-UFO6-150W-110-H-TWTCCT

