


Project Name: \_\_\_\_\_  
 Date: \_\_\_\_\_ Note: \_\_\_\_\_

## LED FLOOD LIGHT



### Certifications



**Application:** wall lighting, landscape, building facade and signage, entry ways, garages, building perimeters, loading bays and both for residential and commercial applications


### SPECIFICATION

SKU	HYA-FL-15W-80*110-D-K-50K	HYA-FL-30W-80*110-D-K-50K	HYA-FL-50W-80*110-D-K-50K
MODEL No.	TS-FL0802-15W	TS-FL0803-30W	TS-FL0805-50W
Wattage	15W	30W	50W
Lumens	1950 lm	3600 lm	6000 lm
REPLACES (MH)	70W	100W	150W
Lamp Base Model	LUMILED3030		
Efficiency	> 120 LM/W		
CCT	5000K		
Mounting	Knuckle Mount		
Lighting Angle	80*110°		
CRI	> 70		
Working Temperature	-40 °F ~ +113 °F		
Waterproof Rating	IP65		
Lifetime	50,000 hours		
DLC ID	P424YAFC	PV5AMPIL	PPVQRAOF
PC/Pack	30	20	10
Inner Box	5.51" * 2.2" * 6.46"	7.4" * 2.4" * 7.6"	9.37" * 2.6" * 8.8"
Master Box	17.2" * 11.6" * 13.86"	15.4" * 12.6" * 16.1"	19.4" * 13.9" * 9.64"
Weight (Master Box)	46.96 LB	44.75 LB	36.82 LB

### FEATURE

The slim compact LED Flood Light has die cast aluminum housing, which also acts as a heat sink, designed to ensure high efficiency and abundant cooling by natural convection passive airflow. It is a great replacement for a wide range of security, commercial and residential lighting applications.

### DIMENSIONS

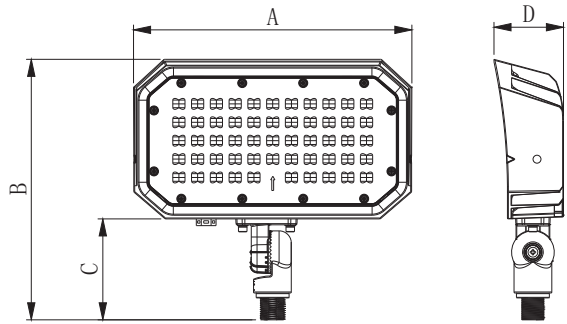

	A	B	C	D
15W	5.1"	6.1"	3.3"	1.8"
30W	7.0"	7.2"	3.3"	2.0"
50W	9.0"	8.4"	2.2"	2.3"

## ORDERING CODE DEFINITION

**Example: HYA-FL-50W-80\*110-D-K-50K-PC or HYA-FL-15W-80\*110-D-K-50K**

Company Code	Product	Wattage	Lighting Angle	Dimming	Mounting	CCT	Photocell
HY	FL: Flood Light	15W	80*110: 80*110°	D: 0-10V Dimmable	K: Knuckle	50K: 5000K	Blank: NO PHOTOCELL
		30W					PC: WITH PHOTOCELL
		50W					(PC only available in 50W)