

## LED Wall Pack Light – WP Series



**Application:** Ideal for outdoor use as non-cutoff and semi-cutoff wall-mounted area luminaires. Suitable for site lighting, entrances, security lighting, perimeters, and various other outdoor wall-mount applications.


### Features

- Isolated, 0-10V dimmable driver.
- Die-cast aluminum housing delivers bright, uniform light.
- Lumen Maintenance over 70% @ 50,000+ Hours.
- Efficient alternative to HID lighting, providing significant energy savings.
- cULus wet location rated with an easy-to-access wiring compartment.
- Impact-resistant and durable glass lens.

### Specification


| Model                 | HYA-WP-80W-TW3CCT                   | HYA-WP-120W-TW3CCT  |
|-----------------------|-------------------------------------|---------------------|
| Watt                  | 80/60/45W                           | 120/100/80W         |
| Lumens                | 10400/7800/5850lm                   | 15600/13000/10400lm |
| DLC#                  | S-K798U4                            | S-P5E8NQ            |
| PF                    | >0.9                                |                     |
| Working Voltage       | AC120-277V                          |                     |
| CCT                   | 3000K/4000K/5000K Selectable        |                     |
| Photocell             | Pre-Installed                       |                     |
| Finish                | Dark Bronze                         |                     |
| Efficiency            | 130LM/W                             |                     |
| CRI                   | Ra>80                               |                     |
| Operating Temperature | -40°F to 113°F                      |                     |
| Beam Angle            | 95°x105°                            |                     |
| Environment Location  | IP65/ Wet Location                  |                     |
| PC/PACK               | 1                                   |                     |
| Package Dim           | 15.35"x11.42"x9.25" / 390X290X235mm |                     |
| Package Weight        | 10.34LB/4.69KG                      | 11.27LB/5.11KG      |

### Dimensions

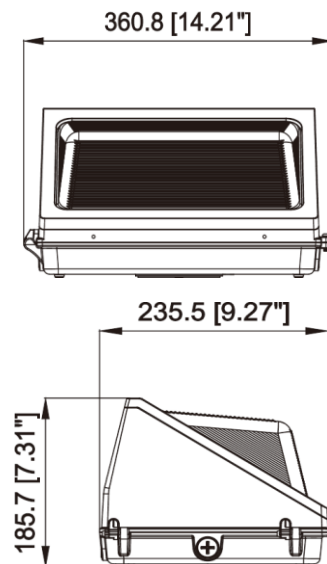

### Photometric Report


#### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

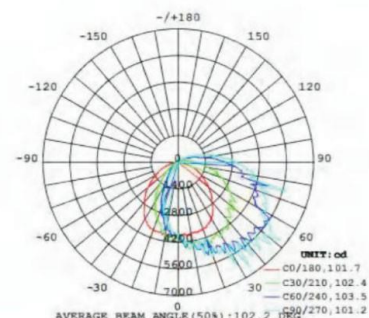

## LED Wall Pack Light – WP Series

### Installation Instruction


1. Use a screw driver to unscrew the lamp screws and remove the upper half of the fixture.

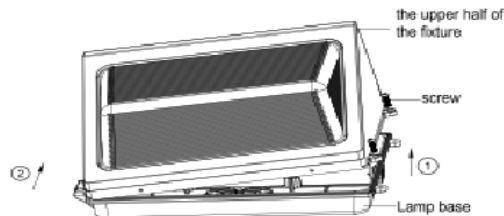


2. Unscrew the cover of the entry hole on the lamp base and remove the cover.




3. According to the embedded terminal box, punch the corresponding mounting hole on the light's mount.

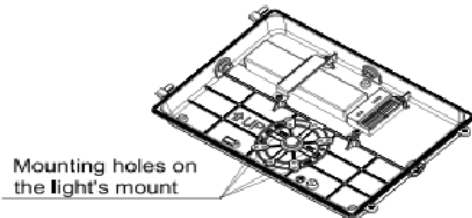


4. Put the input line in the embedded box passes through the waterproof pad and then passed through the lamp base.

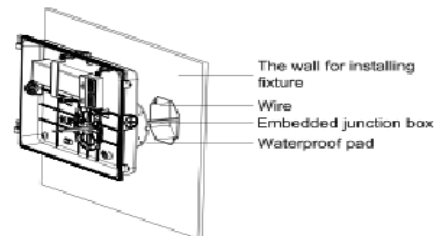


5. Use screw to lock the lamp base on the embedded junction box.



6. Connect the input wire and the dimming wire of the light, then put the connected wires into the embedded terminal box.



7. Connect the output wires of driver with the wires of PCB board.

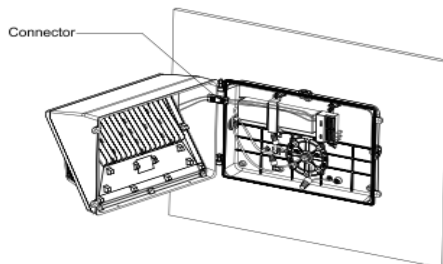

8. Use screws to lock the fixture. Installation completed.

