


## LED Exit Sign and Emergency Light Combo

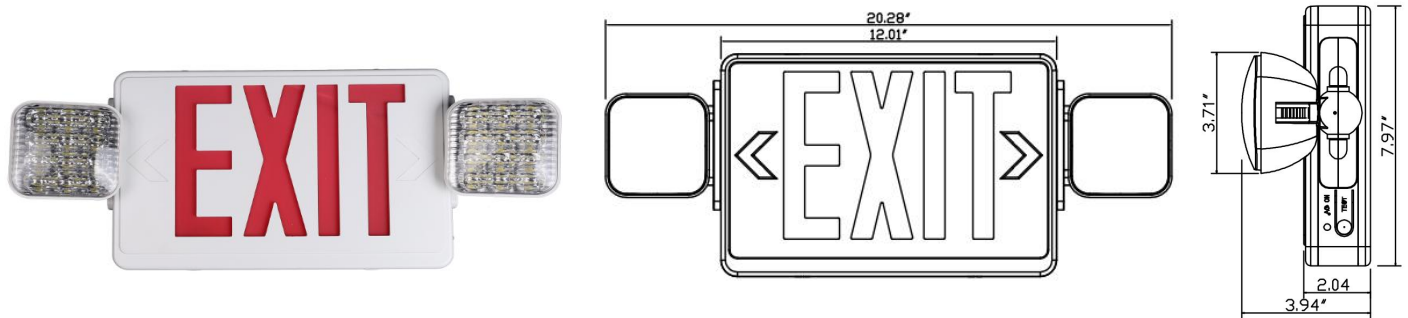

### FEATURES

- High impact flame retardant high thermos and color stable UL 94-5VA rated polycarbonate
- Snap-fit construction to enable fast installation
- Perfect option for applications requiring an Exit sign and emergency light in the same area
- Wall or top mounted

### ELECTRICAL

- UL924 Listed
- UL Damp Location Rated
- Dual 120/277 voltage. Optional multi-tap voltage available
- 2 x 2.2W LAMP HEADS SMD 2835 LEDs
- Built-in 9.6V700mAH rechargeable Ni-cd battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator

### SPECIFICATION

|                       |                                     |
|-----------------------|-------------------------------------|
| Model No.             | HY-EXLCOMB01RED                     |
| Voltage               | 120/277v 60 Hz                      |
| Finish                | White Finish / Red Sign             |
| Emergency Time        | 90 Minutes with 6.0V Ni-Cad Battery |
| Lumens                | 247 lm                              |
| Wattage               | 3.0W@ 120v; 3.7W@ 277V              |
| Operating Temperature | 32°F ~ +104°F / 0°C ~ +40°C         |
| Package Info          | 20.1x12.4x17.1                      |
| PC/ Master Pack       | 6 PCS                               |
| Weight                | 27 LB                               |