

Marine watermakers

Three models for independent cruising

AQUA 30 PRO



30 litres per hour

AQUA 60 PRO



65 litres per hour

AQUA 110 PRO



110 litres per hour

12 V DC or 24 V DC on every model

MODEL	30 PRO	60 PRO	110 PRO
Freshwater output	30 L/h	65 L/h	110 L/h
Output in U.S. gallons	7.9 gal/h	17.1 gal/h	29 gal/h
Current at 12 V DC	11 A	24 A	40 A
Current at 24 V DC	5.5 A	12 A	20 A
Feedwater flow	300 L/h	650 L/h	1,000 L/h
Flow in U.S. gallons	79 gal/h	171 gal/h	264 gal/h
Operating pressure	55 bar	55 bar	50 bar
Dry weight*	25 kg	28 kg	37 kg

SHARED SPECIFICATIONS

Salt rejection

Minimum 99.5%

Feedwater salinity

Up to 50,000 ppm TDS (NaCl)

pH range

4-11

Product water TDS

Less than 500 ppm

Feedwater temperature

0.5°C to 45°C (33°F to 113°F)

Chlorine tolerance

Less than 0.1 ppm

Installation kit and maintenance kit included

PRICING

AQUA 30 PRO

AQUA 60 PRO

AQUA 110 PRO

PRO TOUCH


*Dry weights exclude water hoses and cables. Rated output: $\pm 15\%$ at 13.8 V DC, 26°C / 80°F feedwater and 33 g/L salinity. Reverse osmosis performance varies with feedwater temperature.

Components and dimensions


AQUA 30 PRO

25 kg dry*


RO assembly

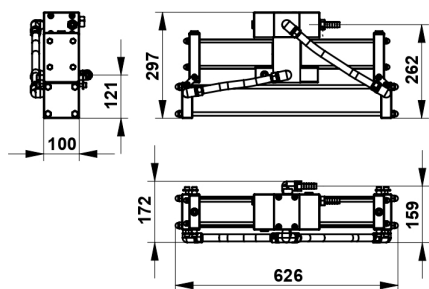


Feed pump



Filter set




Flushing kit




AQUA 60 PRO

28 kg dry*


RO assembly

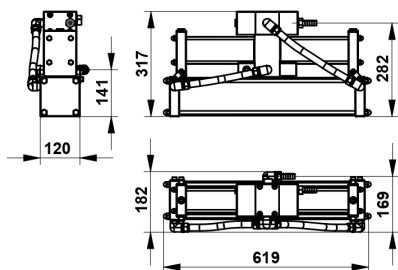


Feed pump



Filter set




Flushing kit




AQUA 110 PRO

37 kg dry*


RO assembly

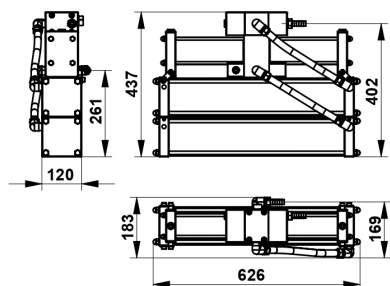


Feed pump

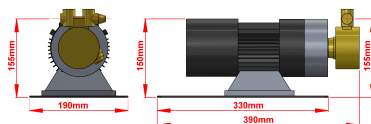

Filter set



Flushing kit



Dimensions in millimetres. Manufacturer illustrations are not to scale.

Confirm the complete installation layout and service access before ordering. *Dry weights exclude water hoses and cables.