



Available with
Black Housing



CapreraLT

LED Flood/Spreader Light

What do you do to improve the industry's best-selling marine LED flood light? Add features, improve the beam pattern, and increase the output! Lumitec's CapreraLT LED flood lights/spreader lights do just that. New two-color technology provides amazing white output with elegant blue and night vision-preserving red for navigating hazardous waterways. Our exclusive wide beam optical technology puts the light across the deck where you need it most, providing for up to twice the usable light of the competitor's LED deck lights. Fully water sealed and, as with all Lumitec products, proudly designed and manufactured in the USA.

Specifications:

Lumens:	1000+ (white)
CCT:	5000K
CRI:	70+
Voltage:	10-30vDC
Rated Watts:	16
IP Rating	IP67
Housing	Die-Cast Aluminum

Key Features:

- One of the most popular spreader lights on the market.
- Completely water sealed and IP67 compliant.
- Easy Installation – simple 2-wire hook up.
- Light and versatile with various mounting options.
- Constructed of marine grade die-cast aluminum and heat tempered glass.
- Over 2,000+ hour of rigorous ASTM-B-117 Salt Spray Chamber testing.
- Proudly designed and manufactured in the USA.
- 3 Year warranty on all Lumitec products.

Product Details:

SKU	COLOR OUTPUT	HOUSING	CRI*	CCT*	VOLTAGE	12VDC	24VDC	LUMENS†
101292	White Non-Dimming	White	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
101293	White Non-Dimming	Black	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)

* Lumens, CRI & CCT applies only to white light.

† Integrating sphere measured lumens within 1 minute of initial startup

Features:



Lumen Output



Third Party Dimmer



Color Match Commitment



2-Wire Hookup



3 Year Warranty



Certifications:



IP Rated



European Conformity

Ph. + (561) 272-9840 | lumiteclighting.com



Beam Pattern:


CapreraLT - LED Flood/Spreader Light

CapreraLT- Flood Pattern

Illuminance at a Distance			
	Center Beam fc	Beam Width	
4.3ft	81.5 fc	2.5 ft	3.7 ft
8.7ft	19.9 fc	5.1 ft	7.5 ft
13.0ft	8.91 fc	7.6 ft	11.2 ft
17.3ft	5.03 fc	10.2 ft	15.0 ft
21.7ft	3.20 fc	12.7 ft	18.8 ft
26.0ft	2.23 fc	15.3 ft	22.5 ft

■ Vert. Spread: 32.7°
■ Horiz. Spread: 46.7°

Illuminance at Distance

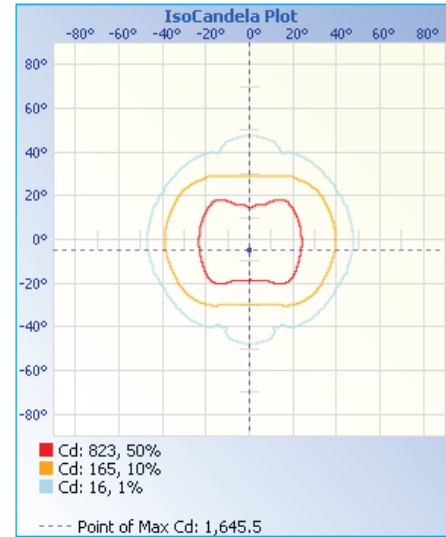

Iso Candela Plot

Dimensions:

- Width: 4.49in (11.41cm)
- Height: 1.98in (5.05 cm)
- Depth: 2.58in (6.55cm)

