



Available with  
Black Housing

## CapriLT LED Flood/Spreader Light

What do you do to improve the industry's best-selling marine LED flood light? Add features, improve the beam pattern, and increase the output! Lumitec's CapriLT LED flood lights/spreader lights do just that. New two-color technology provides amazing white output with elegant blue and night vision-preserving red for navigating hazardous waterways. Our exclusive wide beam optical technology puts the light across the deck where you need it most, providing for up to twice the usable light of the competitor's LED deck lights. Fully water sealed and, as with all Lumitec products, proudly designed and manufactured in the USA.

### Specifications:

Lumens:	1000+ (white)
CCT:	5000K
CRI:	70+
Voltage:	10-30vDC
Rated Watts:	16
IP Rating	IP67
Housing	Die-Cast Aluminum

### Key Features:

- One of the most popular spreader lights on the market.
- Completely water sealed and IP67 compliant.
- Easy Installation – simple 2-wire hook up.
- Recess mount design for clean flush finish look.
- Constructed of marine grade die-cast aluminum and heat tempered glass.
- Over 2,000+ hour of rigorous ASTMB-117 Salt Spray Chamber testing.
- Proudly designed and manufactured in the USA.
- 3 Year warranty on all Lumitec products.

### Product Details:

SKU	COLOR OUTPUT	HOUSING	CRI*	CCT*	VOLTAGE	12VDC	24VDC	LUMENS†
101288	White Non-Dimming	White	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)
101289	White Non-Dimming	Black	70+	5000	10-30vDC	1.3A	600mA	1000+ (wht)

\* Lumens, CRI & CCT applies only to white light.

† Integrating sphere measured lumens within 1 minute of initial startup

#### Features:



Lumen Output



Third Party Dimmer



Color Match Commitment



2-Wire Hookup



3 Year Warranty



#### Certifications:



IP Rated



European Conformity

Ph. + (561) 272-9840 | lumiteclighting.com



**Beam Pattern:**


**CapriLT - LED Flood/Spreader Light**

**CapriLT- Flood Pattern**

Illuminance at a Distance			
	Center Beam fc	Beam Width	
4.3ft	81.5 fc	2.5 ft	3.7 ft
8.7ft	19.9 fc	5.1 ft	7.5 ft
13.0ft	8.91 fc	7.6 ft	11.2 ft
17.3ft	5.03 fc	10.2 ft	15.0 ft
21.7ft	3.20 fc	12.7 ft	18.8 ft
26.0ft	2.23 fc	15.3 ft	22.5 ft

■ Vert. Spread: 32.7°  
■ Horiz. Spread: 46.7°

Illuminance at Distance

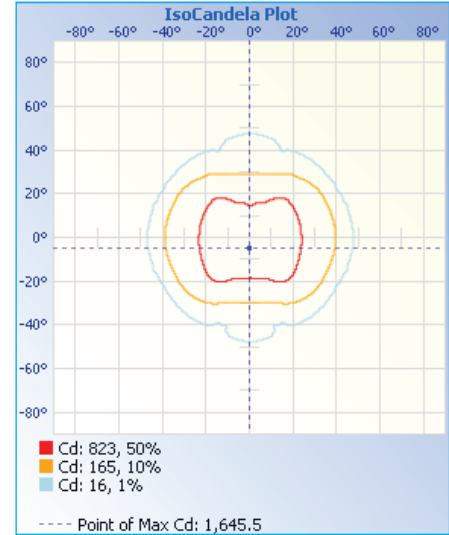

Iso Candela Plot

**Dimensions:**

- Width: 4.94in (12.56cm)
- Height: 1.75in (4.44 cm)
- Depth: 1.57in (3.98cm)

